




# OIL ANALYSIS REPORT

Sample Rating Trend

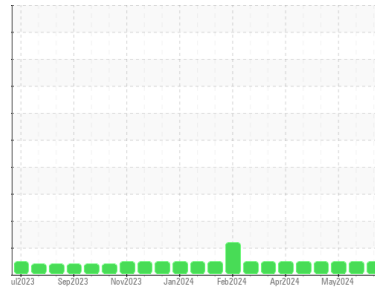

**NORMAL**



Machine Id  
**433003**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0124099</b>	GFL0120192	GFL0120149
Sample Date	Client Info			<b>15 Jul 2024</b>	12 Jun 2024	28 May 2024
Machine Age	hrs	Client Info		<b>4169</b>	3773	3608
Oil Age	hrs	Client Info		<b>0</b>	0	1200
Oil Changed	Client Info			<b>Not Changed</b>	Not Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>5</b>	9	4
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>9	<b>4</b>	5	4
Lead	ppm	ASTM D5185m	>30	<b>2</b>	10	<1
Copper	ppm	ASTM D5185m	>35	<b>2</b>	4	9
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	50	<b>21</b>	18	6
Barium	ppm	ASTM D5185m	5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>48</b>	55	50
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	560	<b>558</b>	548	551
Calcium	ppm	ASTM D5185m	1510	<b>1529</b>	1664	1531
Phosphorus	ppm	ASTM D5185m	780	<b>793</b>	749	687
Zinc	ppm	ASTM D5185m	870	<b>952</b>	952	929
Sulfur	ppm	ASTM D5185m	2040	<b>2438</b>	2762	2621




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>+100	<b>5</b>	10	7
Sodium	ppm	ASTM D5185m		<b>2</b>	9	23
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	1	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		<b>0</b>	0	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.5</b>	11.2	10.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.5</b>	25.0	22.5

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.7</b>	20.9	18.3
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	<b>7.1</b>	2.7	5.3







# OIL ANALYSIS REPORT

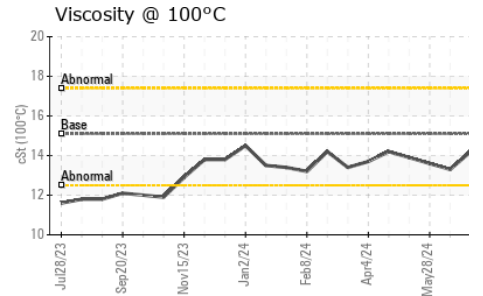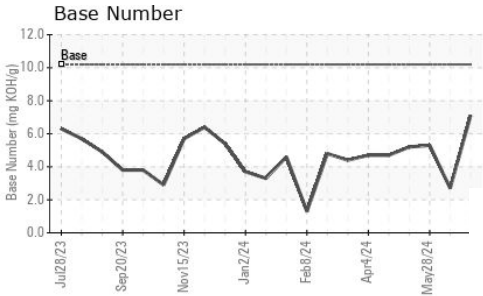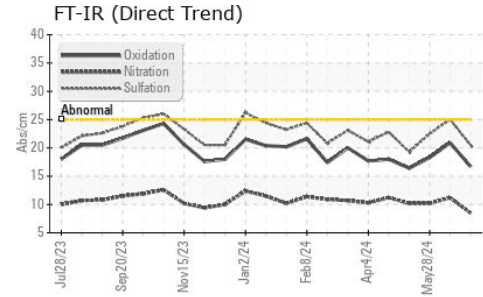

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.2	13.3

## GRAPHS

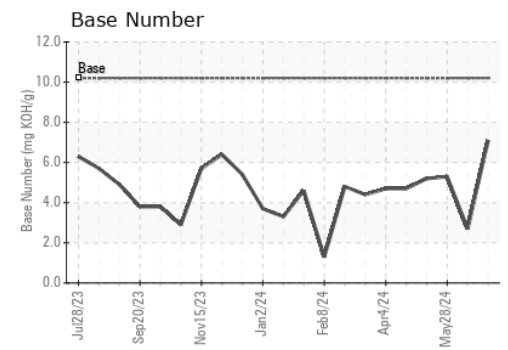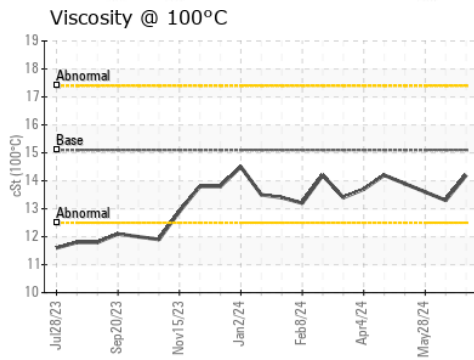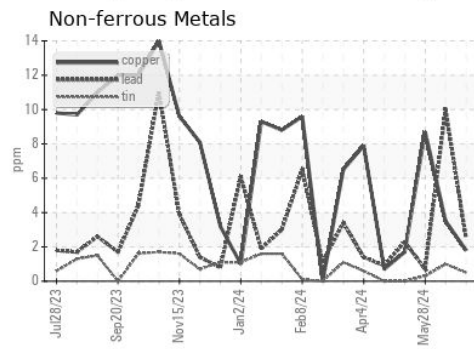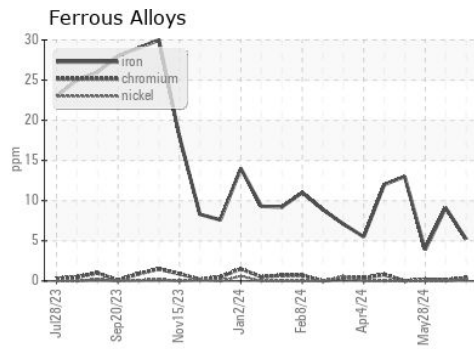

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0124099      **Received** : 18 Jul 2024  
**Lab Number** : 06239850      **Tested** : 18 Jul 2024  
**Unique Number** : 11128684      **Diagnosed** : 18 Jul 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 836 - Kansas City Hauling**  
 7801 East Truman Road  
 Kansas City, MO  
 US 64126  
 Contact: Loyce Stewart  
 loyce.stewart@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)