




# OIL ANALYSIS REPORT

## Sample Rating Trend

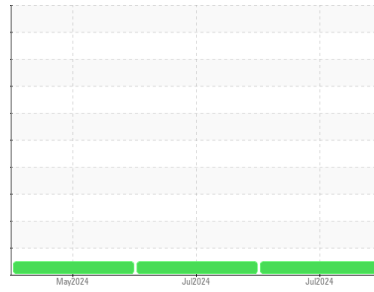

**NORMAL**



Machine Id  
**AUTOCAR 933046**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0109617</b>	GFL0109612	GFL0109649
Sample Date	Client Info		<b>17 Jul 2024</b>	12 Jul 2024	17 May 2024
Machine Age	hrs	Client Info	<b>1185</b>	1154	776
Oil Age	hrs	Client Info	<b>1185</b>	1154	776
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Not Changd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>34</b>	33	32
Chromium	ppm	ASTM D5185m >4	<b>2</b>	2	1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m >9	<b>4</b>	4	3
Lead	ppm	ASTM D5185m >30	<b>10</b>	9	3
Copper	ppm	ASTM D5185m >35	<b>14</b>	14	11
Tin	ppm	ASTM D5185m >4	<b>2</b>	2	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>6</b>	8	10
Barium	ppm	ASTM D5185m 5	<b>5</b>	5	6
Molybdenum	ppm	ASTM D5185m 50	<b>58</b>	57	54
Manganese	ppm	ASTM D5185m 0	<b>4</b>	4	4
Magnesium	ppm	ASTM D5185m 560	<b>754</b>	742	780
Calcium	ppm	ASTM D5185m 1510	<b>1396</b>	1381	1351
Phosphorus	ppm	ASTM D5185m 780	<b>766</b>	748	700
Zinc	ppm	ASTM D5185m 870	<b>966</b>	950	941
Sulfur	ppm	ASTM D5185m 2040	<b>2354</b>	2318	2773

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>69</b>	66	78
Sodium	ppm	ASTM D5185m	<b>2</b>	2	5
Potassium	ppm	ASTM D5185m >20	<b>6</b>	7	4

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0	0
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.6</b>	12.7	11.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>26.0</b>	25.8	23.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>24.0</b>	23.6	20.9
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>3.4</b>	3.5	3.8







# OIL ANALYSIS REPORT

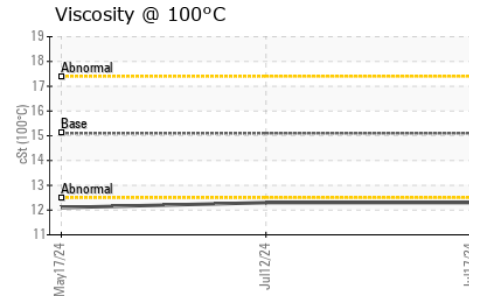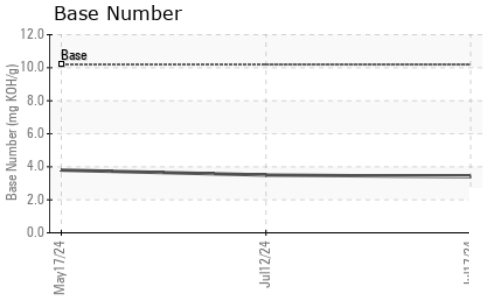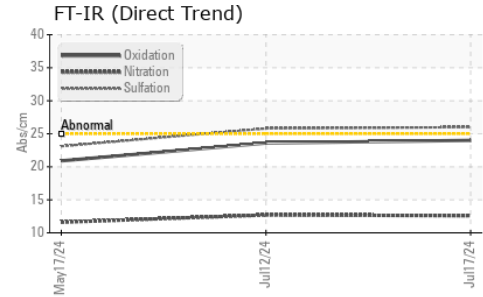

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	<b>12.3</b>	12.3	12.1

## GRAPHS

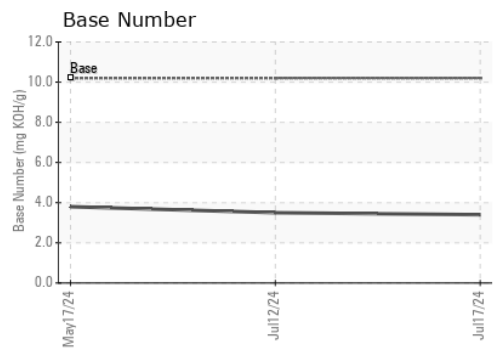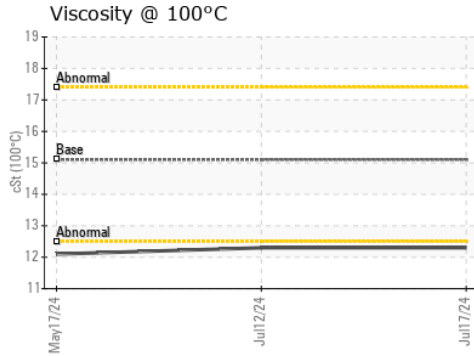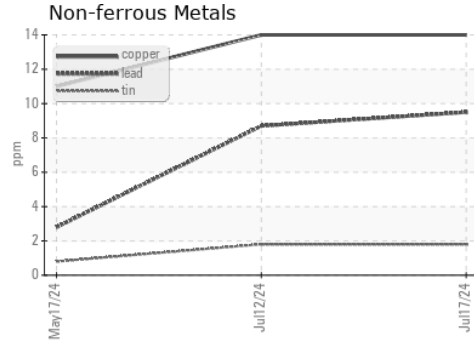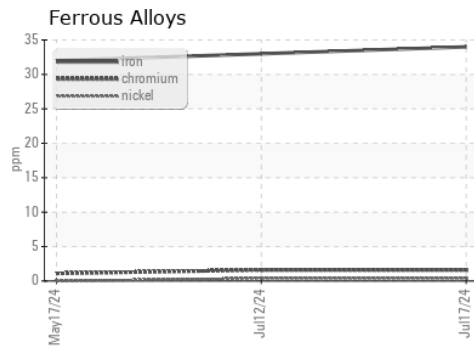

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0109617      **Received** : 18 Jul 2024  
**Lab Number** : **06239862**      **Tested** : 18 Jul 2024  
**Unique Number** : 11128696      **Diagnosed** : 19 Jul 2024 - Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 331 - Columbus**  
 180 Ada Moore Rd  
 Columbus, NC  
 US 28722  
 Contact: Matt Segars  
 matt.segars@gflenv.com  
 T: (800)207-6618  
 F: (252)617-2494

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)