




# PROBLEM SUMMARY

## Sample Rating Trend

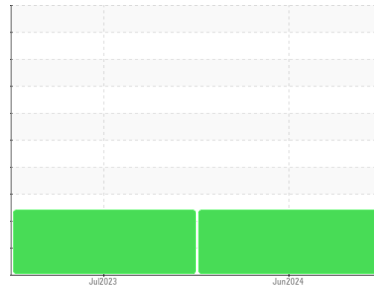

FUEL



Machine Id

## FREIGHTLINER 74

Component


Diesel Engine

Fluid


PETRO CANADA DURON SHP 15W40 (13 LTR)

## COMPONENT CONDITION SUMMARY

### Fuel Dilution

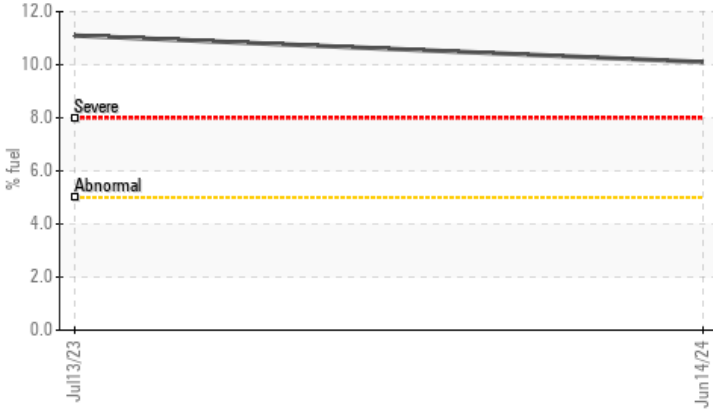

### Viscosity @ 100°C

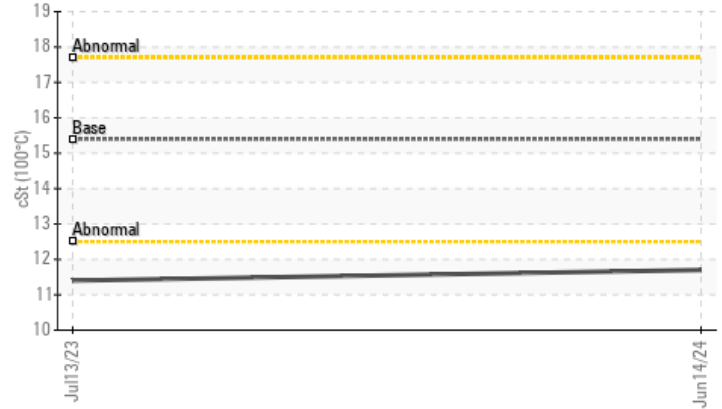

## RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	---
Fuel	%	ASTM D3524	>5	▲ 10.1	▲ 11.1	---
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.7	▲ 11.4	---

Customer Id: ATRPIN  
 Sample No.: PCA0115432  
 Lab Number: 06240009  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Wes Davis +1 905-569-8600 x223  
[wesd@wearcheck.ca](mailto:wesd@wearcheck.ca)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

## HISTORICAL DIAGNOSIS

### FUEL



#### 13 Jul 2023 Diag: Wes Davis


We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

view report



# OIL ANALYSIS REPORT

## Sample Rating Trend

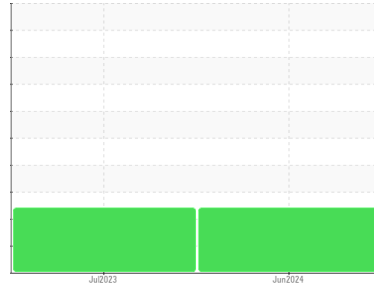

FUEL



Machine Id  
**FREIGHTLINER 74**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (13 LTR)**

### DIAGNOSIS

#### ▲ Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

#### Wear

All component wear rates are normal.

#### ▲ Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

#### ▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0115432</b>	PCA0100631	---
Sample Date	Client Info		<b>14 Jun 2024</b>	13 Jul 2023	---
Machine Age	mls	Client Info	<b>585939</b>	452797	---
Oil Age	mls	Client Info	<b>25000</b>	29431	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>SEVERE</b>	SEVERE	---

CONTAMINATION	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

WEAR METALS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>24</b>	31	---
Chromium	ppm	ASTM D5185m >5	<b>2</b>	2	---
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >30	<b>2</b>	2	---
Lead	ppm	ASTM D5185m >30	<b>6</b>	9	---
Copper	ppm	ASTM D5185m >150	<b>2</b>	8	---
Tin	ppm	ASTM D5185m >5	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	---
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---





ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	0	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 60	<b>52</b>	56	---
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m 1010	<b>717</b>	814	---
Calcium	ppm	ASTM D5185m 1070	<b>898</b>	1089	---
Phosphorus	ppm	ASTM D5185m 1150	<b>758</b>	839	---
Zinc	ppm	ASTM D5185m 1270	<b>826</b>	1034	---
Sulfur	ppm	ASTM D5185m 2060	<b>2415</b>	3036	---

CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>3</b>	4	---
Sodium	ppm	ASTM D5185m	<b>4</b>	4	---
Potassium	ppm	ASTM D5185m >20	<b>3</b>	1	---
Fuel	%	ASTM D3524 >5	<b>▲ 10.1</b>	▲ 11.1	---

INFRA-RED	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>2.7</b>	2.6	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.1</b>	11.5	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>26.7</b>	24.7	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>22.7</b>	19.1	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>4.8</b>	5.6	---





# OIL ANALYSIS REPORT

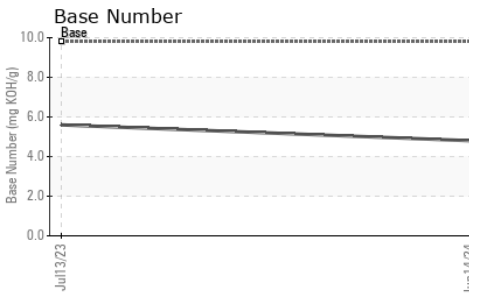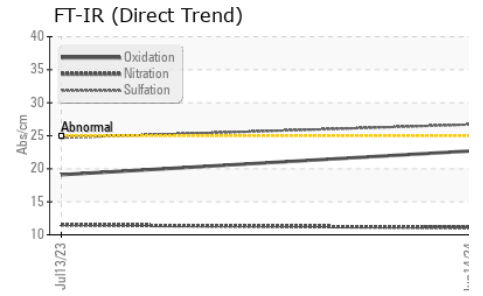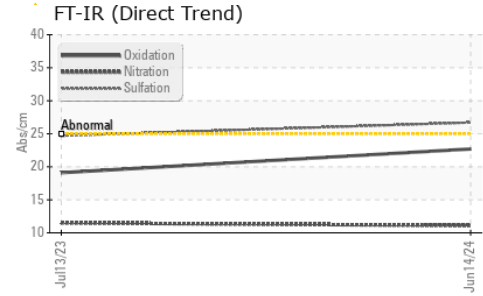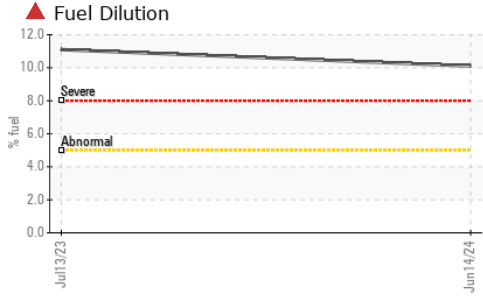

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual		<b>NEG</b>	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>▲ 11.7</b>	<b>▲ 11.4</b>	---

## GRAPHS

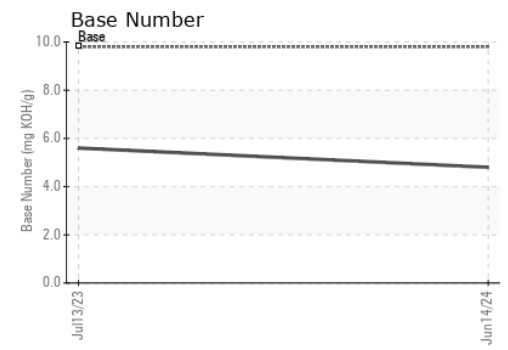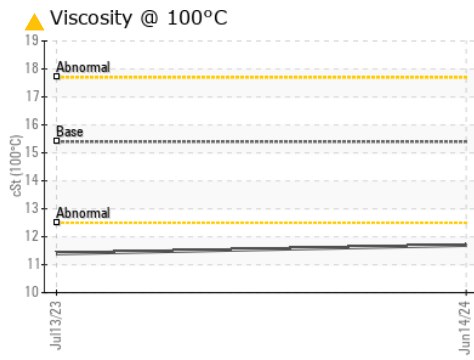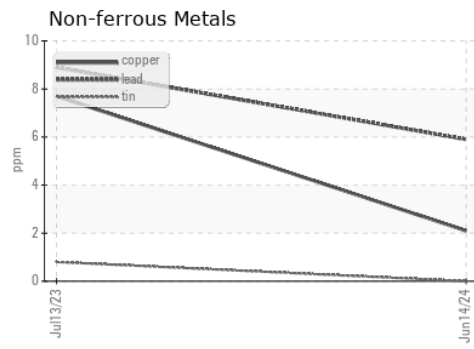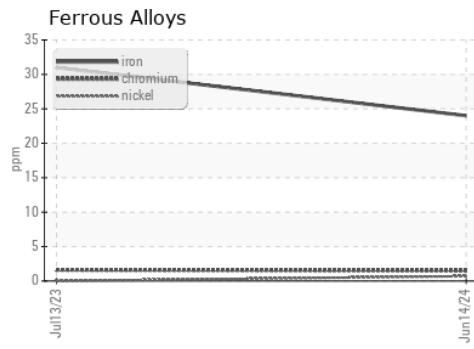

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0115432      **Received** : 18 Jul 2024  
**Lab Number** : **06240009**      **Tested** : 19 Jul 2024  
**Unique Number** : 11128843      **Diagnosed** : 19 Jul 2024 - Wes Davis  
**Test Package** : FLEET ( Additional Tests: PercentFuel )

**A Truck Repair**  
 9349 China Grove Church Road  
 Pineville, NC  
 US 28134  
 Contact: Vlad Melnichuk  
 shop@migway.com  
 T: (980)255-3200  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)