




# OIL ANALYSIS REPORT

## Sample Rating Trend

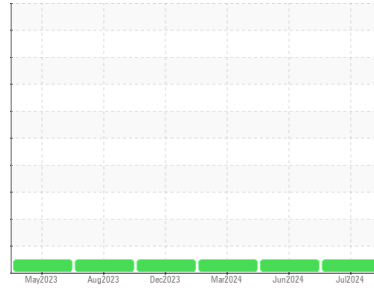

**NORMAL**



Machine Id  
**426143 - SW4621**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0128740</b>	GFL0123536	GFL0112066
Sample Date	Client Info		<b>12 Jul 2024</b>	14 Jun 2024	15 Mar 2024
Machine Age	mls	Client Info	<b>269166</b>	297049	294717
Oil Age	mls	Client Info	<b>269116</b>	0	294717
Oil Changed	Client Info		<b>Not Changed</b>	N/A	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>4</b>	11	32
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>1</b>	2	3
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	<1	2
Tin	ppm	ASTM D5185m >15	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>1</b>	0	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m 60	<b>39</b>	57	58
Manganese	ppm	ASTM D5185m 0	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m 1010	<b>21</b>	10	10
Calcium	ppm	ASTM D5185m 1070	<b>2813</b>	2695	2868
Phosphorus	ppm	ASTM D5185m 1150	<b>1111</b>	1156	1188
Zinc	ppm	ASTM D5185m 1270	<b>1309</b>	1399	1349
Sulfur	ppm	ASTM D5185m 2060	<b>3890</b>	3247	3711

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	13	12
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	1	2
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	3

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.2	0.6
Nitration	Abs/cm	*ASTM D7624 >20	<b>4.8</b>	7.7	11.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>13.5</b>	16.5	22.7


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>8.0</b>	9.8	14.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.4</b>	8.0	6.6




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

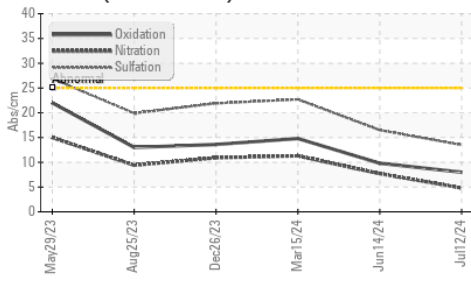

Base Number

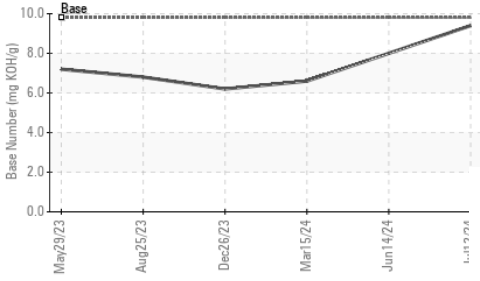

Viscosity @ 100°C

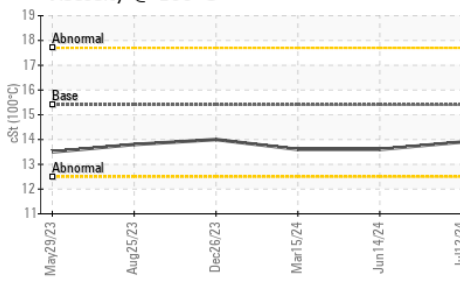


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.9	13.6

## GRAPHS


Ferrous Alloys

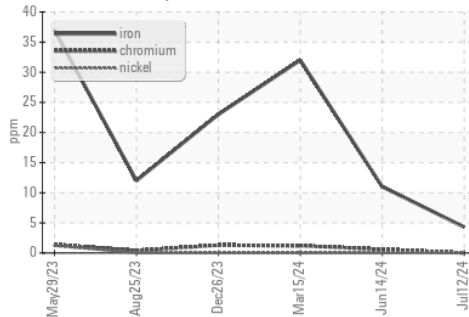



Non-ferrous Metals

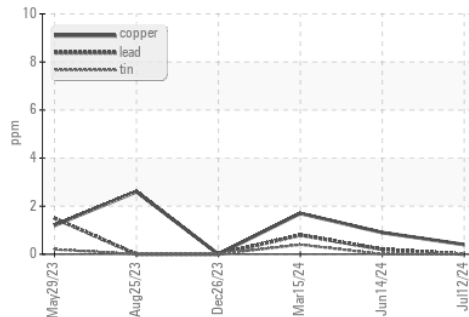

Viscosity @ 100°C

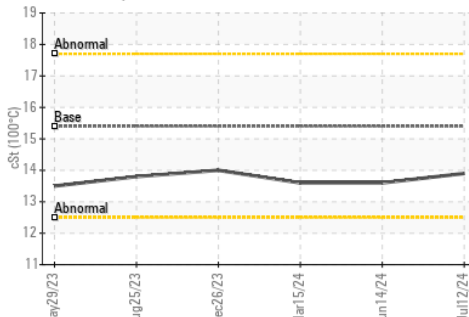

Base Number

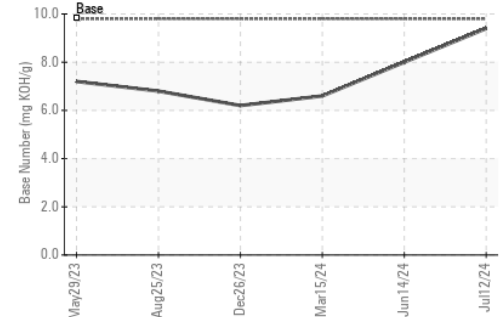

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0128740  
**Lab Number** : 06240033  
**Unique Number** : 11128867  
**Test Package** : FLEET

**Received** : 18 Jul 2024  
**Tested** : 19 Jul 2024  
**Diagnosed** : 19 Jul 2024 - Sean Felton

**GFL Environmental - 983 - Sugar Land Hauling**  
 16011 West Belfort Street  
 Sugar Land, TX  
 US 77498  
 Contact: Adrian Martinez  
 adrianmartinez@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)