


# PROBLEM SUMMARY

Machine Id  
**FREIGHTLINER 71**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (13 LTR)**



Sample Rating Trend

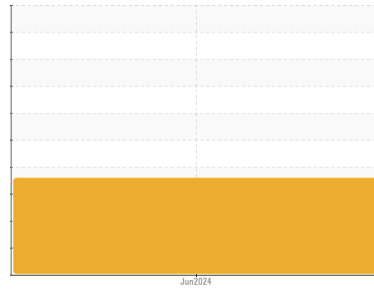

**SOOT**



## COMPONENT CONDITION SUMMARY

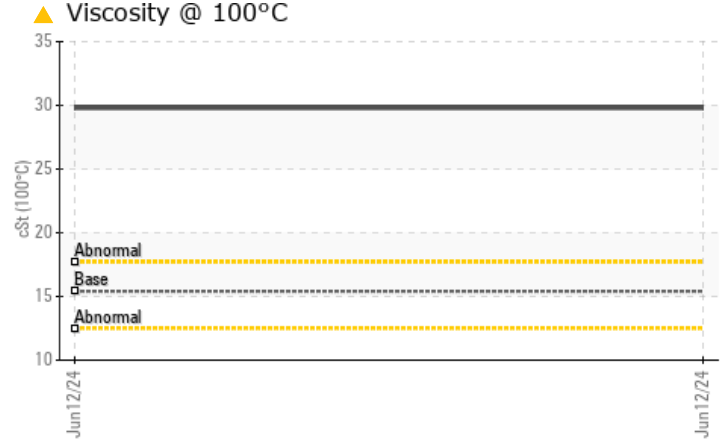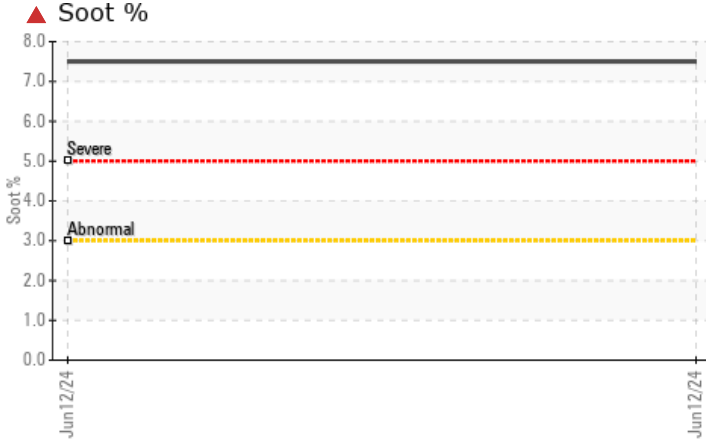

## RECOMMENDATION

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.

## PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	---	---
Soot %	%	*ASTM D7844	>3	▲ 7.5	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	▲ 0.0	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 29.8	---	---

Customer Id: ATRPIN  
 Sample No.: PCA0115428  
 Lab Number: 06240080  
 Test Package: FLEET



To manage this report scan the QR code


To discuss the diagnosis or test data:  
 Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Alert	---	---	?	NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.
Check Combustion	---	---	?	We advise that you check for faulty combustion, plugged air filters, or aftercoolers.

## HISTORICAL DIAGNOSIS

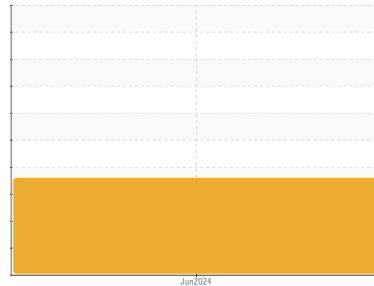

**SOOT**



Machine Id  
**FREIGHTLINER 71**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (13 LTR)**

## DIAGNOSIS

### ▲ Recommendation

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is an abnormal amount of solids and carbon present in the oil.

### ▲ Fluid Condition

The oil viscosity is higher than normal. The BN level is low.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0115428</b>	---	---
Sample Date	Client Info		<b>12 Jun 2024</b>	---	---
Machine Age	mls	Client Info	<b>655850</b>	---	---
Oil Age	mls	Client Info	<b>25000</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>SEVERE</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>56</b>	---	---
Chromium	ppm	ASTM D5185m >5	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m >2	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >30	<b>2</b>	---	---
Lead	ppm	ASTM D5185m >30	<b>25</b>	---	---
Copper	ppm	ASTM D5185m >150	<b>6</b>	---	---
Tin	ppm	ASTM D5185m >5	<b>2</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>2</b>	---	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m 60	<b>56</b>	---	---
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m 1010	<b>914</b>	---	---
Calcium	ppm	ASTM D5185m 1070	<b>1068</b>	---	---
Phosphorus	ppm	ASTM D5185m 1150	<b>1000</b>	---	---
Zinc	ppm	ASTM D5185m 1270	<b>1242</b>	---	---
Sulfur	ppm	ASTM D5185m 2060	<b>3145</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>7</b>	---	---
Sodium	ppm	ASTM D5185m	<b>2</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>3</b>	---	---
Fuel	%	ASTM D3524 >5	<b>&lt;1.0</b>	---	---

## INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>▲ 7.5</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>34.3</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>62.7</b>	---	---

## FLUID DEGRADATION


	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>79.0</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>▲ 0.0</b>	---	---

# OIL ANALYSIS REPORT

▲ FT-IR (Direct Trend)

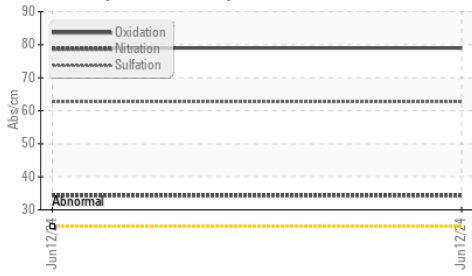


▲ Soot %

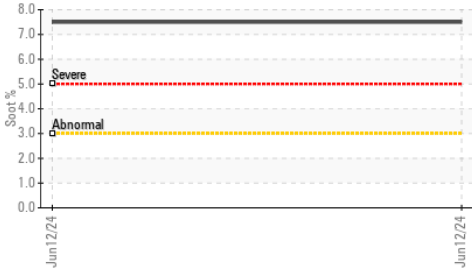

▲ Base Number







▲ Viscosity @ 100°C

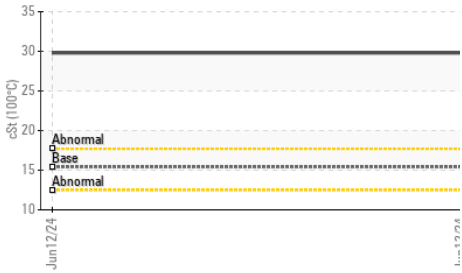

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 29.8	---	---

## GRAPHS

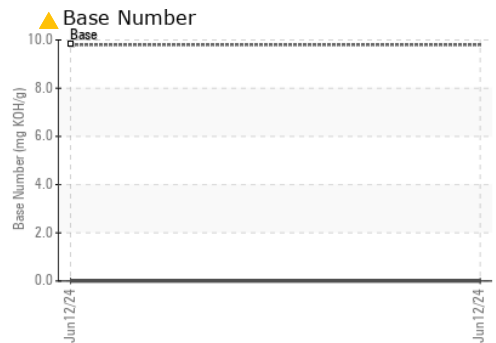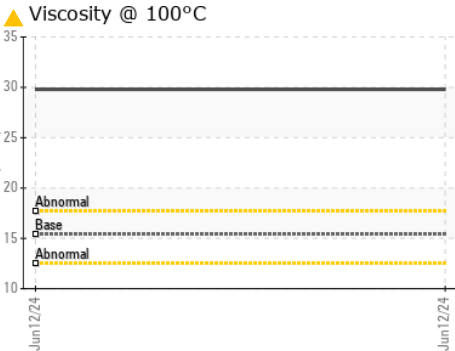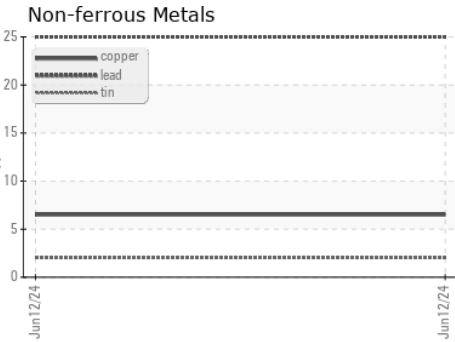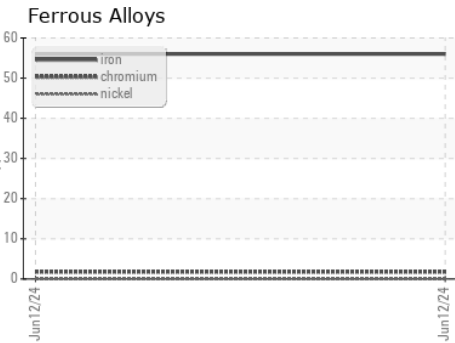

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0115428      **Received** : 18 Jul 2024  
**Lab Number** : 06240080      **Tested** : 19 Jul 2024  
**Unique Number** : 11128914      **Diagnosed** : 19 Jul 2024 - Jonathan Hester  
**Test Package** : FLEET ( Additional Tests : FuelDilution )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**A Truck Repair**  
 9349 China Grove Church Road  
 Pineville, NC 28134  
 Contact: Vlad Melnichuk  
 shop@migway.com  
 T: (980)255-3200  
 F: