


# OIL ANALYSIS REPORT

## Sample Rating Trend



ISO

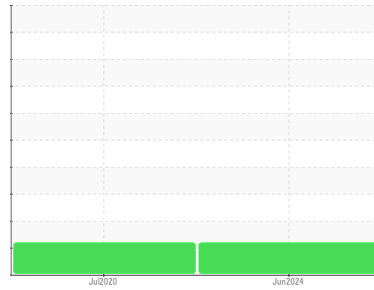

Area  
**POUCH [99063221]**  
 Machine Id  
**L36 JBT OUTFEED**  
 Component  
**Gearbox**  
 Fluid  
**GEAR OIL ISO 220 (--- GAL)**

### DIAGNOSIS

#### Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0127063</b>	PCA0018943	---
Sample Date	Client Info			<b>30 Jun 2024</b>	01 Jul 2020	---
Machine Age	hrs	Client Info		<b>0</b>	0	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>N/A</b>	Changed	---
Sample Status				<b>ABNORMAL</b>	ABNORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	NEG	---





WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>5</b>	3	---
Chromium	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m	>15	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>4</b>	0	---
Lead	ppm	ASTM D5185m	>100	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m	>200	<b>&lt;1</b>	0	---
Tin	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	---
Antimony	ppm	ASTM D5185m	>5	<b>---</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	50	<b>0</b>	<1	---
Barium	ppm	ASTM D5185m	15	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	15	<b>&lt;1</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>0</b>	0	---
Magnesium	ppm	ASTM D5185m	50	<b>&lt;1</b>	0	---
Calcium	ppm	ASTM D5185m	50	<b>3</b>	49	---
Phosphorus	ppm	ASTM D5185m	350	<b>311</b>	161	---
Zinc	ppm	ASTM D5185m	100	<b>12</b>	2	---
Sulfur	ppm	ASTM D5185m	12500	<b>755</b>	25	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>14</b>	6	---
Sodium	ppm	ASTM D5185m		<b>0</b>	0	---
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	0	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>1300	<b>▲ 16021</b>	▲ 89792	---
Particles >6µm		ASTM D7647	>320	<b>▲ 2558</b>	▲ 9245	---
Particles >14µm		ASTM D7647	>80	<b>72</b>	▲ 91	---
Particles >21µm		ASTM D7647	>20	<b>13</b>	13	---
Particles >38µm		ASTM D7647	>4	<b>3</b>	1	---
Particles >71µm		ASTM D7647	>3	<b>2</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>17/15/13	<b>▲ 21/19/13</b>	▲ 24/20/14	---

# OIL ANALYSIS REPORT

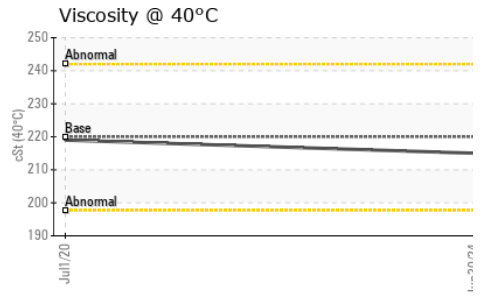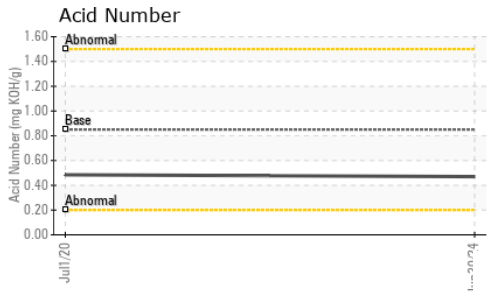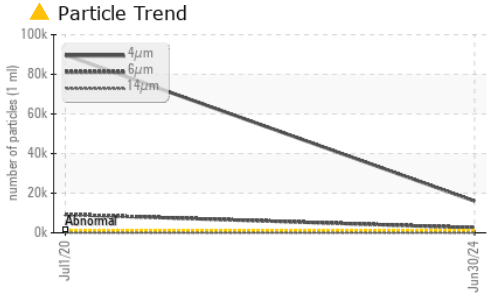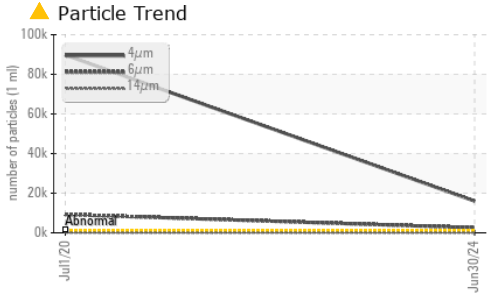


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.85	<b>0.47</b>	0.485	---





VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual		<b>NEG</b>	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	220	<b>215</b>	219	---

### SAMPLE IMAGES

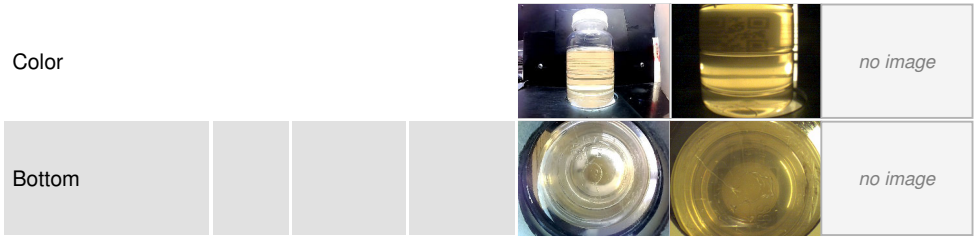

### GRAPHS

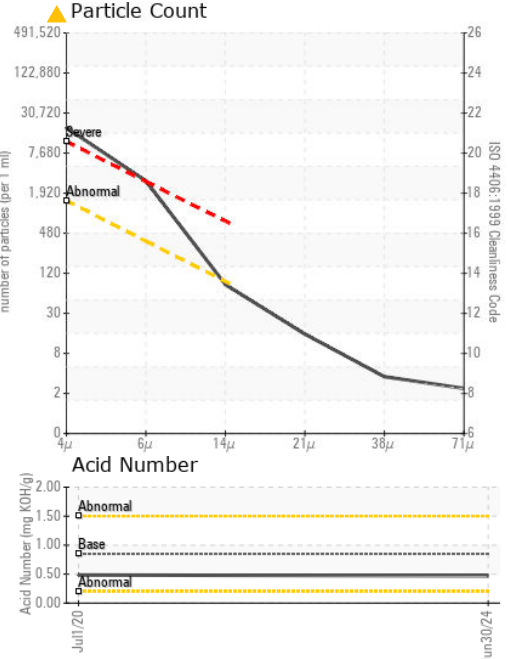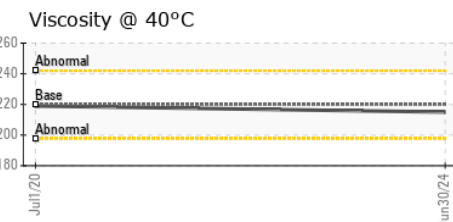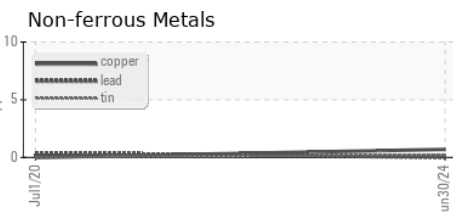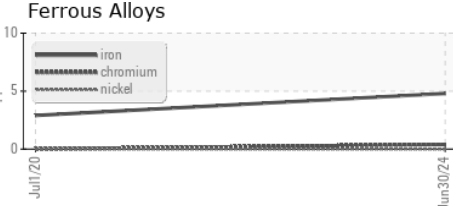

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0127063      **Received** : 18 Jul 2024  
**Lab Number** : **06240298**      **Tested** : 19 Jul 2024  
**Unique Number** : 11129132      **Diagnosed** : 20 Jul 2024 - Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: PrtCount )

**KraftHeinz - Springfield - Plant 8311 PCA**  
 2035 E BENNETT  
 SPRINGFIELD, MO  
 US 65804  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: