




# OIL ANALYSIS REPORT

## Sample Rating Trend

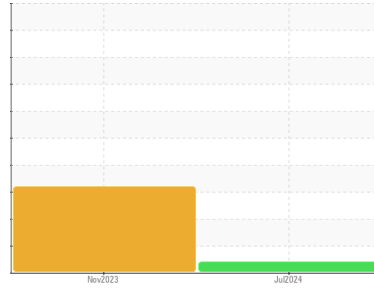

## VISCOSITY



Machine Id  
**427158**  
 Component  
**1 Differential**  
 Fluid  
**GEAR OIL SAE 75W90 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: 1st Axle / Pusher )

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The oil viscosity is lower than normal. Confirm oil type.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0128745</b>	GFL0094149	---
Sample Date	Client Info		<b>12 Jul 2024</b>	29 Nov 2023	---
Machine Age	mls	Client Info	<b>348046</b>	326008	---
Oil Age	mls	Client Info	<b>348046</b>	326008	---
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	---
Sample Status			<b>ATTENTION</b>	ABNORMAL	---

### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	<b>NEG</b>	NEG	---

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	<b>149</b>	499	---
Chromium	ppm	ASTM D5185m >10	<b>1</b>	4	---
Nickel	ppm	ASTM D5185m >10	<b>&lt;1</b>	▲ 12	---
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >25	<b>4</b>	7	---
Lead	ppm	ASTM D5185m >25	<b>0</b>	3	---
Copper	ppm	ASTM D5185m >100	<b>4</b>	26	---
Tin	ppm	ASTM D5185m >10	<b>6</b>	▲ 24	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	<b>31</b>	194	---
Barium	ppm	ASTM D5185m 200	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 12	<b>0</b>	<1	---
Manganese	ppm	ASTM D5185m	<b>2</b>	13	---
Magnesium	ppm	ASTM D5185m 12	<b>0</b>	0	---
Calcium	ppm	ASTM D5185m 150	<b>7</b>	142	---
Phosphorus	ppm	ASTM D5185m 1650	<b>610</b>	1375	---
Zinc	ppm	ASTM D5185m 125	<b>27</b>	87	---
Sulfur	ppm	ASTM D5185m 22500	<b>20403</b>	23223	---

### CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	<b>37</b>	▲ 132	---
Sodium	ppm	ASTM D5185m	<b>2</b>	6	---
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	7	---

### VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual >.2	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual	<b>NEG</b>	NEG	---



# OIL ANALYSIS REPORT

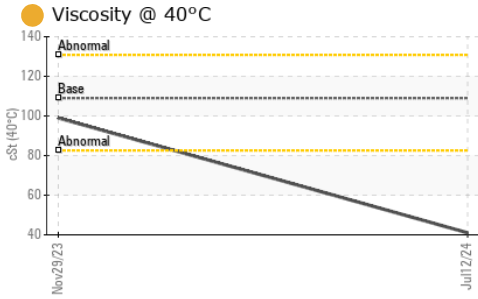




### FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445 109	● 41.0	99.0	---

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

### GRAPHS

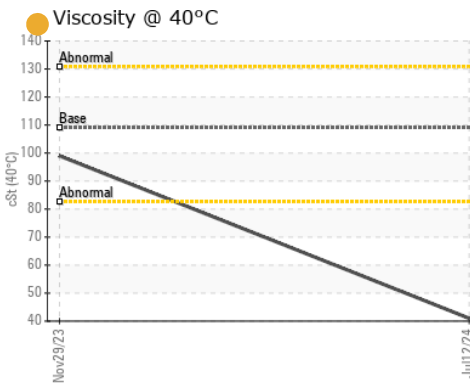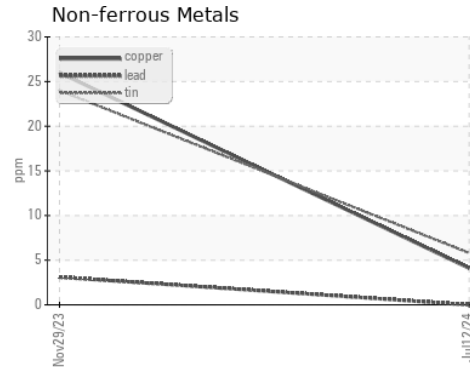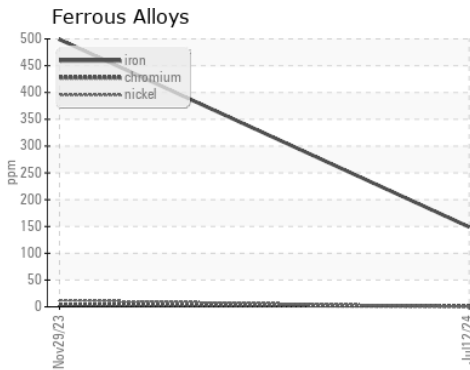

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0128745  
**Lab Number** : 06240837  
**Unique Number** : 11129671  
**Test Package** : FLEET

**Received** : 18 Jul 2024  
**Tested** : 19 Jul 2024  
**Diagnosed** : 22 Jul 2024 - Don Baldrige

**GFL Environmental - 983 - Sugar Land Hauling**  
 16011 West Belfort Street  
 Sugar Land, TX  
 US 77498  
 Contact: TECHNICIAN ACCOUNT  
 wcgfldemo@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: