



# CONSTRUCTION EQUIPMENT

## VOLVO A40G 340676 - HYDRAULIC SYSTEM



**Sample No:** VCP434458  
**Oil Type:** VOLVO SUPER HYDRAULIC OIL 46  
**Job No:**



### SAMPLE INFORMATION

Sample Number	VCP434458	VCP380703	---	---
Sample Date	19 Mar 2024	29 Nov 2022	---	---
Machine Hours	8753	7767	---	---
Oil Hours	0	0	---	---
Oil Changed	Not Changed	Changed	---	---
Sample Status	ABNORMAL	NORMAL	---	---

**ALTA EQUIPMENT COMPANY - METRO WEST**  
 56195 PONTIAC TRAIL  
 NEW HUDSON, MI  
 US 48165  
 Contact: JEREME CHIE  
 jereme.chie@altaequipment.com  
 T:  
 F: (248)356-2029



### OIL CONDITION

Visc @ 40°C	cSt	█ 43.0	█ 47.4	---	---
Acid Number (AN)	mg KOH/g	█ 0.41	█ 0.30	---	---



### CONTAMINATION

Water	%	NEG	NEG	---	---
Particles >4µm		█ 35385	█ 4532	---	---
Particles >6µm		▲ 11635	█ 1181	---	---
Particles >14µm		▲ 798	█ 39	---	---
ISO 4406:1999 (c)		22/21/17	19/17/12	---	---
Silicon	ppm	█ 7	█ <1	---	---
Sodium	ppm	█ 5	█ 0	---	---
Potassium	ppm	█ 0	█ 0	---	---

### Diagnosis

We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a moderate amount of particulates (2 to 100 microns in size) present in the oil. The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.



### WEAR METALS

Iron	ppm	█ 8	█ 0	---	---
Copper	ppm	█ 4	█ 0	---	---
Lead	ppm	█ <1	█ 0	---	---
Tin	ppm	█ <1	█ 0	---	---
Aluminum	ppm	█ <1	█ 0	---	---
Chromium	ppm	█ <1	█ 0	---	---
Molybdenum	ppm	█ 1	█ <1	---	---
Nickel	ppm	█ 0	█ 0	---	---
Titanium	ppm	0	0	---	---
Silver	ppm	0	0	---	---
Manganese	ppm	█ <1	█ 0	---	---
Vanadium	ppm	0	0	---	---



### ADDITIVES

Calcium	ppm	█ 121	█ 75	---	---
Magnesium	ppm	█ 5	█ <1	---	---
Zinc	ppm	█ 474	█ 335	---	---
Phosphorus	ppm	█ 376	█ 285	---	---
Barium	ppm	█ 0	█ 0	---	---
Boron	ppm	█ 0	█ 0	---	---

**Depot:** VOLVO2990  
**Unique No:** 10939744  
**Signed:** Wes Davis  
**Report Date:** 26 Mar 2024




# CONSTRUCTION EQUIPMENT




## GRAPHS

Ferrous Alloys

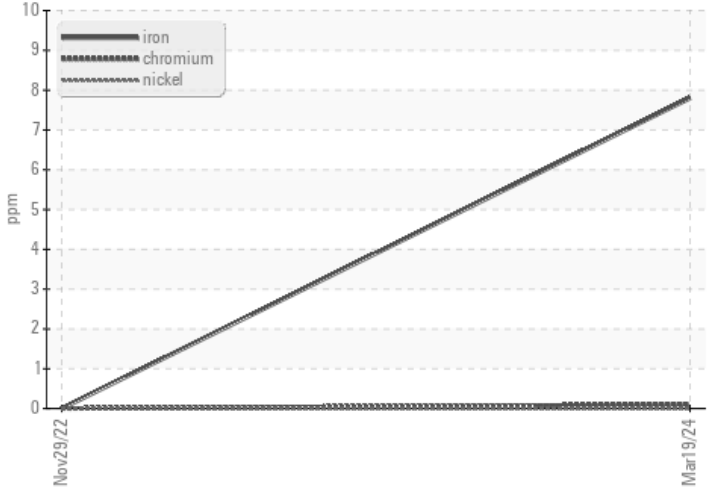


Non-ferrous Metals

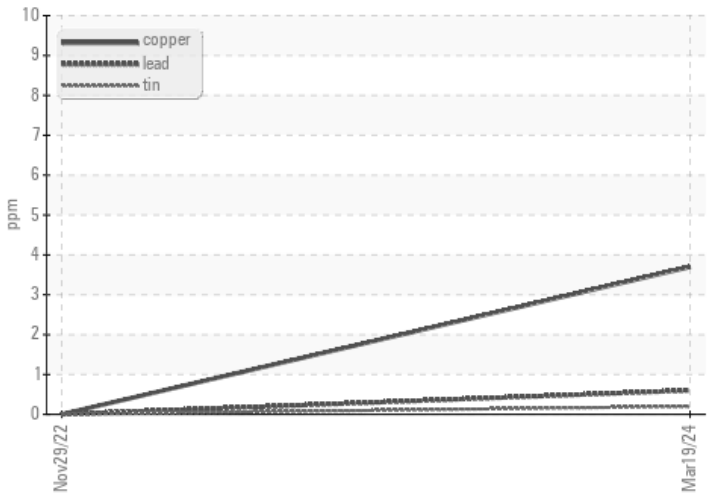

Viscosity @ 40°C



▲ Particle Count

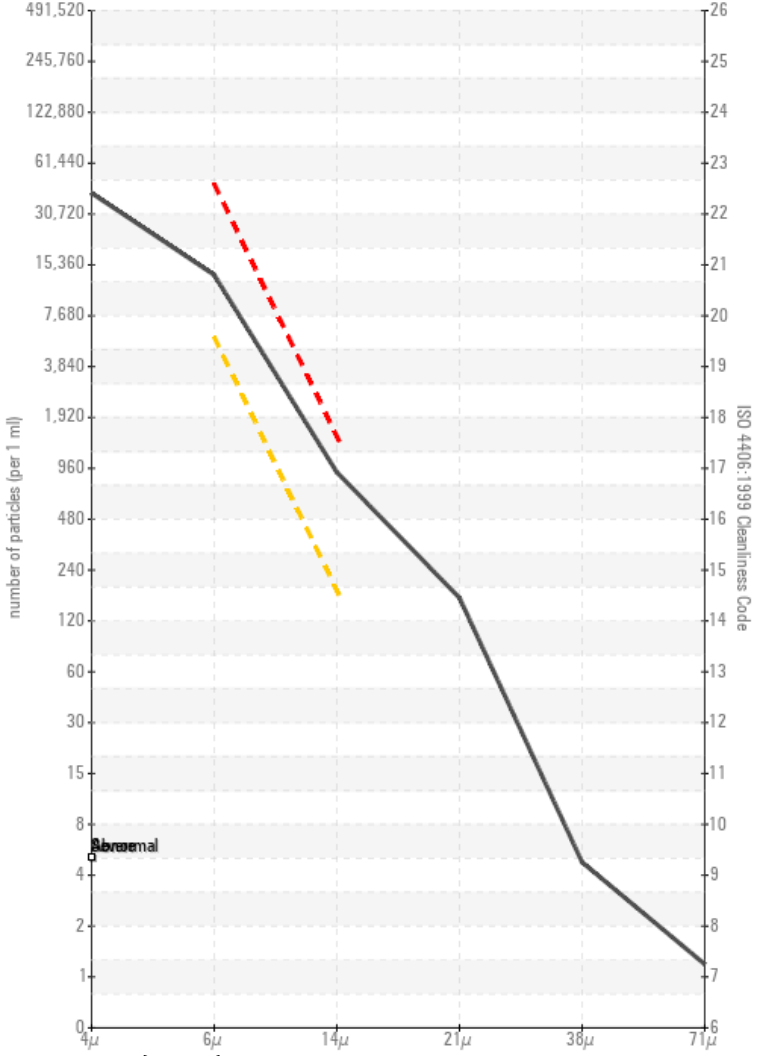

Acid Number

