

OIL ANALYSIS REPORT

Sample Rating Trend

SAMPLE INFORMATION method limit/base current history1

INSOLUBLES

history2

M207

NEW OIL #2 Component New (Unused) Oil Fluid {not provided} (--- LTR)

DIAGNOSIS

New Oil

A Recommendation

This is a baseline read-out on the submitted sample. We advise that you use electrostatic filtration on this fluid before use.

Contamination

There is a high amount of particulates (2 to 15 microns in size) present in the oil.

Fluid Condition


The viscosity index is 114. The Varnish Potential Rating (VPT) is very high at 90-100.

SAMPLE INFORM	ATION	method	limit/base	current	nistory i	nistory2
Sample Number		Client Info		WC727775		
Sample Date		Client Info		01 Mar 2007		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
· · ·	_		11 1. 11			
CONTAMINATION	1	method	limit/base	current	history1	history2
Water		WC Method		NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		5		
Chromium	ppm	ASTM D5185(m)		<1		
Nickel	ppm	ASTM D5185(m)		<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		<1		
Aluminum	ppm	ASTM D5185(m)		<1		
Lead	ppm	ASTM D5185(m)		3		
Copper	ppm	ASTM D5185(m)		15		
Tin	ppm	ASTM D5185(m)		<1		
Vanadium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		0		
Barium	ppm	ASTM D5185(m)		2		
Molybdenum	ppm	ASTM D5185(m)		<u>-</u> <1		
Manganese	ppm	ASTM D5185(m)		<1		
Magnesium	ppm	ASTM D5185(m)		72		
Calcium		ASTM D5185(m)		87		
Phosphorus	ppm ppm	ASTM D5185(m)		725		
Zinc		ASTM D5185(m)		693		
Sulfur	ppm	ASTM D5185(m)		2787		
	ppm	. ,				
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		5		
Sodium	ppm	ASTM D5185(m)		2		
Potassium	ppm	ASTM D5185(m)		0		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		A 53150		
Particles >6µm		ASTM D7647		<u> </u>		
Particles >14µm		ASTM D7647		27		
Particles >21µm		ASTM D7647		7		
Particles >38µm		ASTM D7647		1		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)		A 23/20/12		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.727		
MPC Varnish Potential	Scale	ASTM D7843(m)*	>15	4 57		
40:07) David		, /		0	// K K	


Contact/Location: Jim Smith - POLOAK




OIL ANALYSIS REPORT

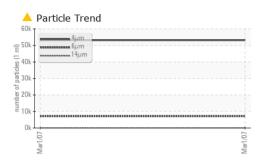




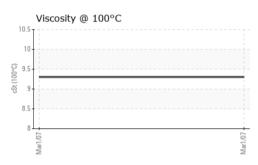

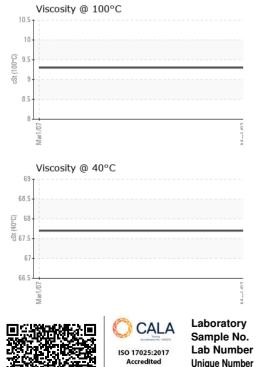

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*		NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		67.7		
Visc @ 100°C	cSt	ASTM D7279(m)		9.3		
Viscosity Index (VI)	Scale	ASTM D2270*		114		
SAMPLE IMAGES		method	limit/base	current	history1	history2



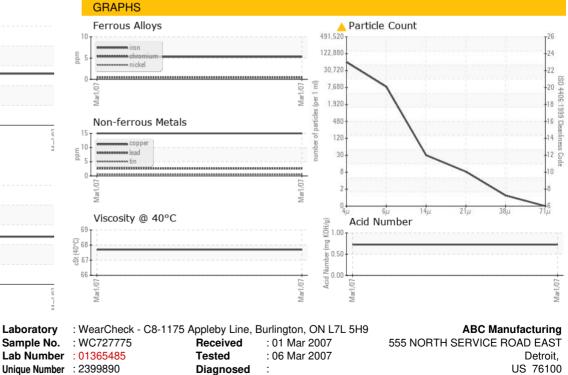

 Laboratory
 Test Package
 : IND 2 (Additional Tests: KV100, MPC, PrtCount, TAN Man, VI)

 To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

 Validity of results and interpretation are based on the sample and information as supplied.
 Supplied 1.1

Report Id: POLOAK [WCAMIS] 01365485 (Generated: 04/02/2024 16:42:07) Rev: 1

Contact/Location: Jim Smith - POLOAK

jim.smith@abcmanufacturing.com

Contact: Jim Smith

T: (311)555-1212

F: (311)555-1313

Sample Color & Clarity

This page left intentionally blank