




OIL ANALYSIS REPORT

Sample Rating Trend

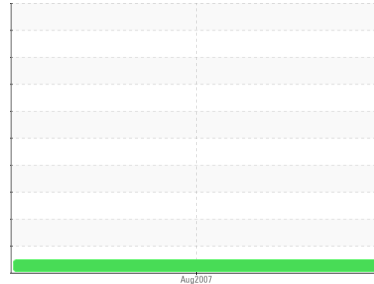

ISO



Machine Id
000021 GUNSTAND(NEW BUILD)

Component
Hydraulic System

Fluid
ROYAL ROYCO 717 (300 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. NAS 1638 class 8.

Fluid Condition

The condition of oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC02010150	---	---
Sample Date	Client Info			14 Aug 2007	---	---
Machine Age	cyc	Client Info		0	---	---
Oil Age	cyc	Client Info		0	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				NORMAL	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m		<1	---	---
Chromium	ppm	ASTM D5185m		0	---	---
Nickel	ppm	ASTM D5185m		<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		<1	---	---
Lead	ppm	ASTM D5185m		0	---	---
Copper	ppm	ASTM D5185m		<1	---	---
Tin	ppm	ASTM D5185m		<1	---	---
Antimony	ppm	ASTM D5185m		0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
Cadmium	ppm	ASTM D5185m		0	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		4	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		0	---	---
Calcium	ppm	ASTM D5185m		<1	---	---
Phosphorus	ppm	ASTM D5185m		598	---	---
Zinc	ppm	ASTM D5185m		2	---	---
Sulfur	ppm	ASTM D5185m		172	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		7	---	---
Sodium	ppm	ASTM D5185m		1	---	---
Potassium	ppm	ASTM D5185m		0	---	---
Water	%	ASTM D6304		0.005	---	---


FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		4652	---	---
Particles >6µm		ASTM D7647		▲ 1359	---	---
Particles >14µm		ASTM D7647		52	---	---
Particles >21µm		ASTM D7647		14	---	---
Particles >38µm		ASTM D7647		3	---	---
Particles >71µm		ASTM D7647		0	---	---
Oil Cleanliness		ISO 4406 (c)		▲ 19/18/13	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.104	---	---




OIL ANALYSIS REPORT


▲ Particle Trend

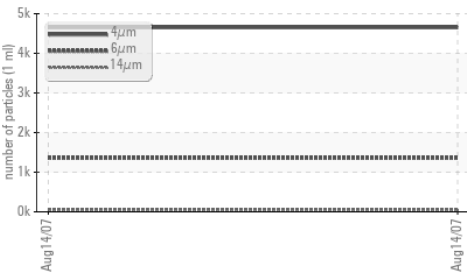


Water (KF)

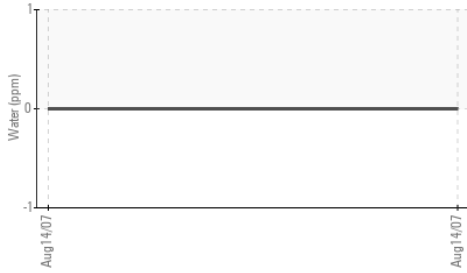

Water (KF)

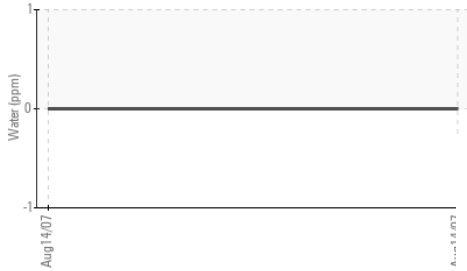

Viscosity @ 40°C

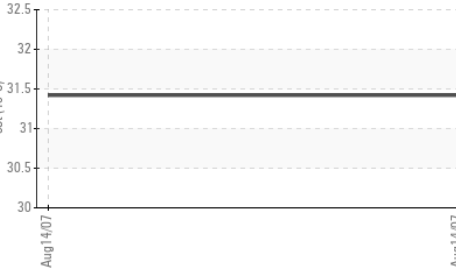






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	31.42	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

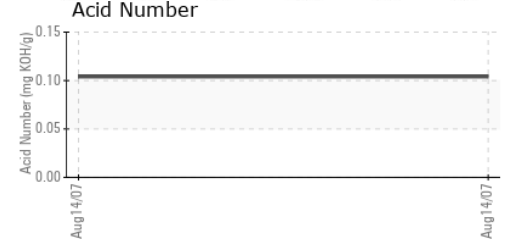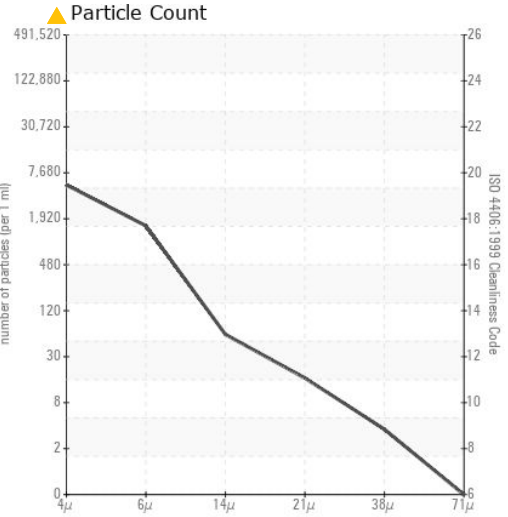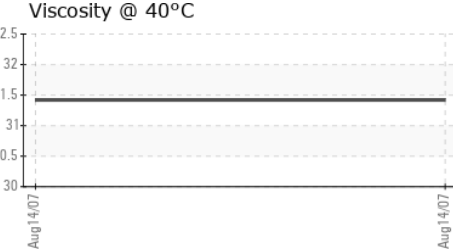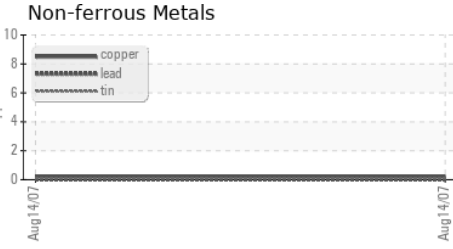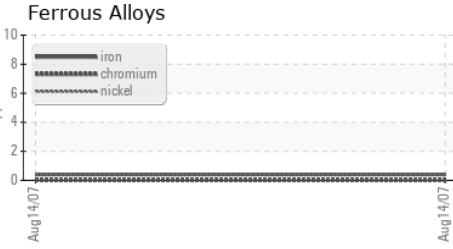

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC02010150 **Received** : 14 Aug 2007
Lab Number : 02010150 **Tested** : 15 Aug 2007
Unique Number : 4188903 **Diagnosed** : 16 Aug 2007 - Doug Bogart
Test Package : IND 2 (Additional Tests: KF)

BAE SYSTEMS
 163 ROCHESTER DR
 LOUISVILLE, KY
 US 40214
 Contact: KEN MAHONEY
 ken.mahoney@baesystems.com
 T: (502)364-6439
 F: (502)364-5973

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)