




OIL ANALYSIS REPORT

Sample Rating Trend

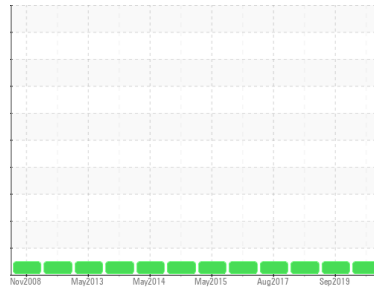

NORMAL



Machine Id
G5-01111 Approved Boat (FRC) (S/N SSEDC 01111)
 Component
Diesel Engine
 Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (10 LTR)

DIAGNOSIS

Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0380456	WC0380464	PC62007675
Sample Date	Client Info			13 Mar 2020	20 Sep 2019	19 Feb 2018
Machine Age	hrs	Client Info		187	175	146
Oil Age	hrs	Client Info		0	0	31
Oil Changed	Client Info			Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>6.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	3	9	5
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		<1	<1	<1
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>25	1	2	1
Lead	ppm	ASTM D5185(m)	>40	<1	1	1
Copper	ppm	ASTM D5185(m)	>330	2	3	2
Tin	ppm	ASTM D5185(m)	>15	0	<1	<1
Antimony	ppm	ASTM D5185(m)		<1	<1	1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	2.5	30	2	1
Barium	ppm	ASTM D5185(m)	0.0	<1	<1	0
Molybdenum	ppm	ASTM D5185(m)	0.7	63	40	39
Manganese	ppm	ASTM D5185(m)	0.0	<1	<1	0
Magnesium	ppm	ASTM D5185(m)	256	918	760	773
Calcium	ppm	ASTM D5185(m)	2057	1161	1160	1133
Phosphorus	ppm	ASTM D5185(m)	935	1019	976	991
Zinc	ppm	ASTM D5185(m)	1223	1181	1158	1213
Sulfur	ppm	ASTM D5185(m)	4079	2879	2875	3016
Lithium	ppm	ASTM D5185(m)		<1	<1	<1


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	5	10	10
Sodium	ppm	ASTM D5185(m)		2	7	3
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	3

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	5.6	7.1	5.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.7	18.3	15.9




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

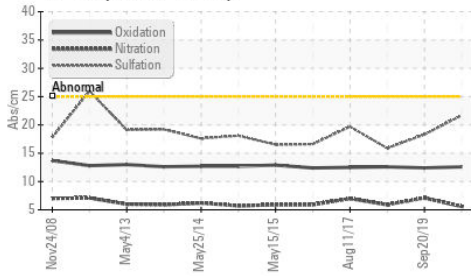


Additives

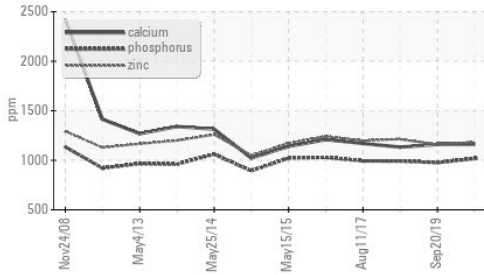

Viscosity @ 100°C

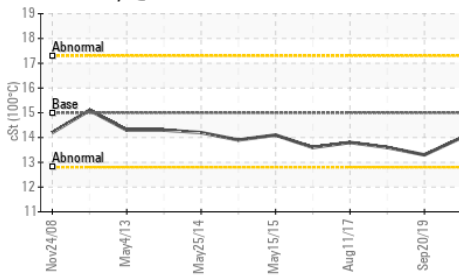

Additives

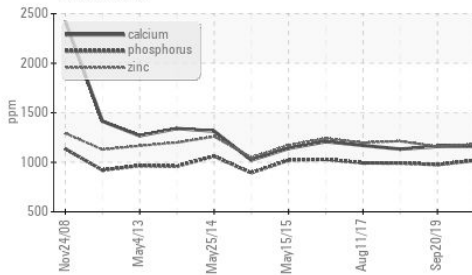


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	12.6	12.4	12.6
Base Number (BN)	mg KOH/g	ASTM D2896*	10	9.63	7.17	8.60

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	15.0	14.0	13.3	13.6

GRAPHS


Ferrous Alloys

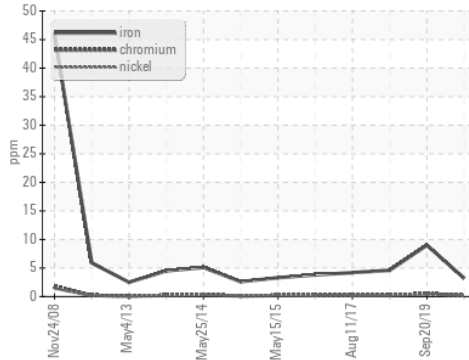


Non-ferrous Metals

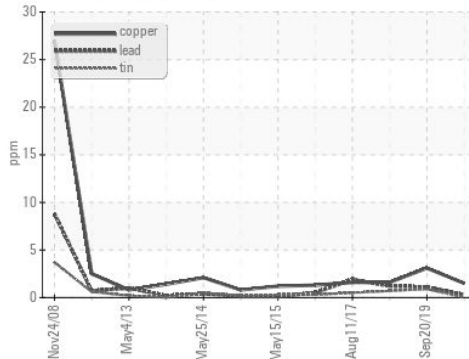

Viscosity @ 100°C

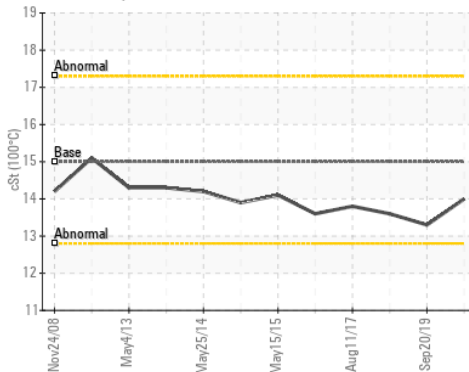

Base Number

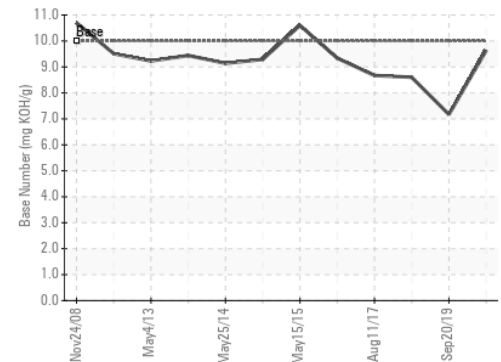

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0380456
Lab Number : **02343947**
Unique Number : 5019375
Test Package : MAR 2
Received : 17 Mar 2020
Tested : 17 Mar 2020
Diagnosed : 17 Mar 2020 - Kevin Marson

CANADIAN COAST GUARD
 CCGS GRIFFON, PO BOX 1000, 401 KING ST.W
 Prescott, ON
 CA K6V 5T3
 Contact: Laurie Bosley
 Laurie.Bosley@dfo-mpo.gc.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
 F: (519)383-1994