

# **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO



# TRPC UNIT #1

Component

**Hydraulic System** 

ESSO NUTO H ISO 68 (--- LTR)

#### ▲ Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

## Wear

All component wear rates are normal.

#### **▲** Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.


## **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION   method   imit/bass   current   history1   history2							
Sample Number   Client Info   WC0488631					Aug2020		
Sample Date   Client Info   10	SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Machine Age yrs Client Info 5	Sample Number		Client Info		WC0488631		
Oil Age         yrs         Client Info         Not Changed            Oil Changed         Client Info         Not Changed            Sample Status         method         limit/base         current         history1         history2           WEAR METALS         method         limit/base         current         history1         history2           Iron         ppm         ASTM D6186m         >20         <1	Sample Date		Client Info		27 Aug 2020		
Oil Changed Sample Status         Contamination         Not Changd ATTENTION	Machine Age	yrs	Client Info		10		
Sample Status	Oil Age	yrs	Client Info		5		
Water   WC Method   Jo.05   NEG   WEAR METALS   method   limit/base   current   history1   history2	Oil Changed		Client Info		Not Changd		
Water   WC Method   So.05   NEG   So.05   NEG   WEAR METALS   method   limit/base   current   history1   history2   history2   limit/base   current   history1   history2   limit/base   current   history1   history2   limit/base   current   history2   limit/base   current   history2   limit/base   current   history2   limit/base   current   history2   limit/base   limit/base   current   history2   limit/base   limit/base   current   history2   limit/base   limit/base	Sample Status				ATTENTION		
WEAR METALS	CONTAMINATION	٧	method	limit/base	current	history1	history2
Iron	Water		WC Method	>0.05	NEG		
Chromium         ppm         ASTM D5185(m)         >20         <1             Nickel         ppm         ASTM D5185(m)         >20         0             Titanium         ppm         ASTM D5185(m)         0             Aluminum         ppm         ASTM D5185(m)         >20         0             Aluminum         ppm         ASTM D5185(m)         >20         0             Aluminum         ppm         ASTM D5185(m)         >20         0             Lead         ppm         ASTM D5185(m)         >20         4             Copper         ppm         ASTM D5185(m)         >20         0             Antimony         ppm         ASTM D5185(m)         0              Vanadium         ppm         ASTM D5185(m)         0              Beryllium         ppm         ASTM D5185(m)         0              ADDITIVES         method         limit/base	WEAR METALS		method	limit/base	current	history1	history2
Nickel ppm ASTM D5185(m) >20 0	Iron	ppm	ASTM D5185(m)	>20	<1		
Titanium	Chromium	ppm	ASTM D5185(m)	>20	<1		
Silver	Nickel	ppm	ASTM D5185(m)	>20	0		
Aluminum         ppm         ASTM D5185(m)         >20         0             Lead         ppm         ASTM D5185(m)         >20         0             Copper         ppm         ASTM D5185(m)         >20         4             Tin         ppm         ASTM D5185(m)         >20         0             Antimony         ppm         ASTM D5185(m)         0             Vanadium         ppm         ASTM D5185(m)         0             Beryllium         ppm         ASTM D5185(m)         0             Cadmium         ppm         ASTM D5185(m)         0             ADDITIVES         method         limit/base         current         history1         history2           Boron         ppm         ASTM D5185(m)         0         <1	Titanium	ppm	ASTM D5185(m)		0		
Lead         ppm         ASTM D5185(m)         >20         0             Copper         ppm         ASTM D5185(m)         >20         4             Tin         ppm         ASTM D5185(m)         >20         0             Antimony         ppm         ASTM D5185(m)         0             Vanadium         ppm         ASTM D5185(m)         0             Beryllium         ppm         ASTM D5185(m)         0             Cadmium         ppm         ASTM D5185(m)         0             ADDITIVES         method         limit/base         current         history1         history2           Boron         ppm         ASTM D5185(m)         0         <1	Silver	ppm	ASTM D5185(m)		0		
Copper         ppm         ASTM D5185(m)         >20         4             Tin         ppm         ASTM D5185(m)         >20         0             Antimony         ppm         ASTM D5185(m)         0             Vanadium         ppm         ASTM D5185(m)         0             Beryllium         ppm         ASTM D5185(m)         0             Cadmium         ppm         ASTM D5185(m)         0             ADDITVES         method         limit/base         current         history1         history2           Boron         ppm         ASTM D5185(m)         0         -1             Barium         ppm         ASTM D5185(m)         0         -1             Magnesium         ppm         ASTM D5185(m)         0              Calcium         ppm         ASTM D5185(m)         5         -1             Phosphorus         ppm         ASTM D5185(m)         310         339	Aluminum	ppm	ASTM D5185(m)	>20	0		
Tin ppm ASTM D5185(m) >20 0	Lead	ppm	ASTM D5185(m)	>20	0		
Antimony	Copper	ppm	ASTM D5185(m)	>20	4		
Vanadium         ppm         ASTM D5185(m)         0             Beryllium         ppm         ASTM D5185(m)         0             Cadmium         ppm         ASTM D5185(m)         0             ADDITIVES         method         limit/base         current         history1         history2           Boron         ppm         ASTM D5185(m)         0         <1             Barium         ppm         ASTM D5185(m)         0         <1             Molybdenum         ppm         ASTM D5185(m)         0         0             Manganese         ppm         ASTM D5185(m)         0         0             Magnesium         ppm         ASTM D5185(m)         5         <1             Calcium         ppm         ASTM D5185(m)         50         35             Phosphorus         ppm         ASTM D5185(m)         3100         2656             Sulfur         ppm         ASTM D5185(m)         <1 </td <td>Tin</td> <td>ppm</td> <td>ASTM D5185(m)</td> <td>&gt;20</td> <th>0</th> <td></td> <td></td>	Tin	ppm	ASTM D5185(m)	>20	0		
Beryllium         ppm         ASTM D5185(m)         0             Cadmium         ppm         ASTM D5185(m)         0             ADDITIVES         method         limit/base         current         history1         history2           Boron         ppm         ASTM D5185(m)         0         <1             Barium         ppm         ASTM D5185(m)         0         <1             Molybdenum         ppm         ASTM D5185(m)         0         0             Manganese         ppm         ASTM D5185(m)         0         0             Magnesium         ppm         ASTM D5185(m)         5         <1             Calcium         ppm         ASTM D5185(m)         50         35             Phosphorus         ppm         ASTM D5185(m)         330         339             Zinc         ppm         ASTM D5185(m)         420         363             Sulfur         ppm         ASTM D5185(m)         3100         2656 <td>Antimony</td> <td>ppm</td> <td>ASTM D5185(m)</td> <td></td> <th>&lt;1</th> <td></td> <td></td>	Antimony	ppm	ASTM D5185(m)		<1		
Cadmium         ppm         ASTM D5185(m)         0             ADDITIVES         method         limit/base         current         history1         history2           Boron         ppm         ASTM D5185(m)         0         <1	Vanadium	ppm	ASTM D5185(m)		0		
ADDITIVES         method         limit/base         current         history1         history2           Boron         ppm         ASTM D5185(m)         0         <1	Beryllium	ppm	ASTM D5185(m)		0		
Boron ppm ASTM D5185(m) 0 <1	Cadmium	ppm	ASTM D5185(m)		0		
Barium         ppm         ASTM D5185(m)         0         <1             Molybdenum         ppm         ASTM D5185(m)         0         0             Manganese         ppm         ASTM D5185(m)         5         <1             Magnesium         ppm         ASTM D5185(m)         50         35             Calcium         ppm         ASTM D5185(m)         330         339             Phosphorus         ppm         ASTM D5185(m)         420         363             Zinc         ppm         ASTM D5185(m)         3100         2656             Sulfur         ppm         ASTM D5185(m)         <1             Lithium         ppm         ASTM D5185(m)         >15         <1             Silicon         ppm         ASTM D5185(m)         >15         <1             Sodium         ppm         ASTM D5185(m)         >20         <1             Potassium         pm         ASTM D5185(m)	ADDITIVES		method	limit/base	current	history1	history2
Molybdenum         ppm         ASTM D5185(m)         0             Manganese         ppm         ASTM D5185(m)         5         <1	Boron	ppm	ASTM D5185(m)	0	<1		
Manganese         ppm         ASTM D5185(m)         0             Magnesium         ppm         ASTM D5185(m)         5         <1	Barium	ppm	ASTM D5185(m)	0	<1		
Magnesium         ppm         ASTM D5185(m)         5         <1             Calcium         ppm         ASTM D5185(m)         50         35             Phosphorus         ppm         ASTM D5185(m)         330         339             Zinc         ppm         ASTM D5185(m)         420         363             Sulfur         ppm         ASTM D5185(m)         3100         26566             Lithium         ppm         ASTM D5185(m)         <1	Molybdenum	ppm	ASTM D5185(m)	0	0		
Calcium         ppm         ASTM D5185(m)         50         35             Phosphorus         ppm         ASTM D5185(m)         330         339             Zinc         ppm         ASTM D5185(m)         420         363             Sulfur         ppm         ASTM D5185(m)         3100         2656             Lithium         ppm         ASTM D5185(m)         <1	Manganese	ppm	ASTM D5185(m)		0		
Phosphorus         ppm         ASTM D5185(m)         330         339             Zinc         ppm         ASTM D5185(m)         420         363             Sulfur         ppm         ASTM D5185(m)         3100         2656             Lithium         ppm         ASTM D5185(m)         <1	Magnesium	ppm	ASTM D5185(m)	5	<1		
Zinc         ppm         ASTM D5185(m)         420         363             Sulfur         ppm         ASTM D5185(m)         3100         2656             Lithium         ppm         ASTM D5185(m)         <1	Calcium	ppm	ASTM D5185(m)	50	35		
Sulfur         ppm         ASTM D5185(m)         3100         2656             Lithium         ppm         ASTM D5185(m)         <1             CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185(m)         >15         <1             Sodium         ppm         ASTM D5185(m)         <1              Potassium         ppm         ASTM D5185(m)         >20         <1             FLUID CLEANLINESS         method         limit/base         current         history1         history2           Particles >4µm         ASTM D7647         >5000         4         7544             Particles >6µm         ASTM D7647         >1300         4         1689             Particles >14µm         ASTM D7647         >40         23             Particles >38µm         ASTM D7647         >10         0             Particles >71µm         ASTM D7647         >3         0		ppm	ASTM D5185(m)	330	339		
Lithium   ppm   ASTM D5185(m)   <1	Zinc	ppm	ASTM D5185(m)	420			
CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185(m)         >15         <1		ppm	. ,	3100	2656		
Silicon       ppm       ASTM D5185(m)       >15       <1           Sodium       ppm       ASTM D5185(m)       <1            Potassium       ppm       ASTM D5185(m)       >20       <1            FLUID CLEANLINESS       method       limit/base       current       history1       history2         Particles >4µm       ASTM D7647       >5000       ▲ 7544           Particles >6µm       ASTM D7647       >1300       ▲ 1689           Particles >14µm       ASTM D7647       >160       85           Particles >21µm       ASTM D7647       >40       23           Particles >38µm       ASTM D7647       >10       0           Particles >71µm       ASTM D7647       >3       0           Oil Cleanliness       ISO 4406 (c)       >19/17/14       20/18/14	Lithium	ppm	ASTM D5185(m)		<1		
Sodium         ppm         ASTM D5185(m)         <1	CONTAMINANTS		method	limit/base	current	history1	history2
Potassium         ppm         ASTM D5185(m)         >20         <1             FLUID CLEANLINESS         method         limit/base         current         history1         history2           Particles >4μm         ASTM D7647         >5000         ▲ 7544             Particles >6μm         ASTM D7647         >1300         ▲ 1689             Particles >14μm         ASTM D7647         >160         85             Particles >21μm         ASTM D7647         >40         23             Particles >38μm         ASTM D7647         >10         0             Particles >71μm         ASTM D7647         >3         0             Oil Cleanliness         ISO 4406 (c)         >19/17/14         20/18/14	Silicon	ppm	ASTM D5185(m)	>15	<1		
FLUID CLEANLINESS         method         limit/base         current         history1         history2           Particles >4μm         ASTM D7647         >5000         ▲ 7544             Particles >6μm         ASTM D7647         >1300         ▲ 1689             Particles >14μm         ASTM D7647         >160         85             Particles >21μm         ASTM D7647         >40         23             Particles >38μm         ASTM D7647         >10         0             Particles >71μm         ASTM D7647         >3         0             Oil Cleanliness         ISO 4406 (c)         >19/17/14         20/18/14	Sodium	ppm	ASTM D5185(m)		<1		
Particles >4μm       ASTM D7647       >5000       ▲ 7544           Particles >6μm       ASTM D7647       >1300       ▲ 1689           Particles >14μm       ASTM D7647       >160       85           Particles >21μm       ASTM D7647       >40       23           Particles >38μm       ASTM D7647       >10       0           Particles >71μm       ASTM D7647       >3       0           Oil Cleanliness       ISO 4406 (c)       >19/17/14       ▲ 20/18/14	Potassium	ppm	ASTM D5185(m)	>20	<1		
Particles >6μm       ASTM D7647       >1300       ▲ 1689           Particles >14μm       ASTM D7647       >160       85           Particles >21μm       ASTM D7647       >40       23           Particles >38μm       ASTM D7647       >10       0           Particles >71μm       ASTM D7647       >3       0           Oil Cleanliness       ISO 4406 (c)       >19/17/14       20/18/14	FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >14μm       ASTM D7647       >160       85           Particles >21μm       ASTM D7647       >40       23           Particles >38μm       ASTM D7647       >10       0           Particles >71μm       ASTM D7647       >3       0           Oil Cleanliness       ISO 4406 (c)       >19/17/14       20/18/14	Particles >4µm		ASTM D7647	>5000	<b>7544</b>		
Particles >21μm       ASTM D7647       >40       23           Particles >38μm       ASTM D7647       >10       0           Particles >71μm       ASTM D7647       >3       0           Oil Cleanliness       ISO 4406 (c)       >19/17/14       20/18/14	Particles >6µm		ASTM D7647	>1300	<b>1689</b>		
Particles >38μm       ASTM D7647       >10       0           Particles >71μm       ASTM D7647       >3       0           Oil Cleanliness       ISO 4406 (c)       >19/17/14       20/18/14	Particles >14µm		ASTM D7647	>160	85		
Particles >71μm	Particles >21µm		ASTM D7647	>40	23		
Oil Cleanliness ISO 4406 (c) >19/17/14 <b>20/18/14</b>	Particles >38µm		ASTM D7647	>10	0		
	Particles >71µm		ASTM D7647	>3	0		
	Oil Classliness		ISO 4406 (c)	>19/17/14	<b>20/18/14</b>		



## OIL ANALYSIS REPORT

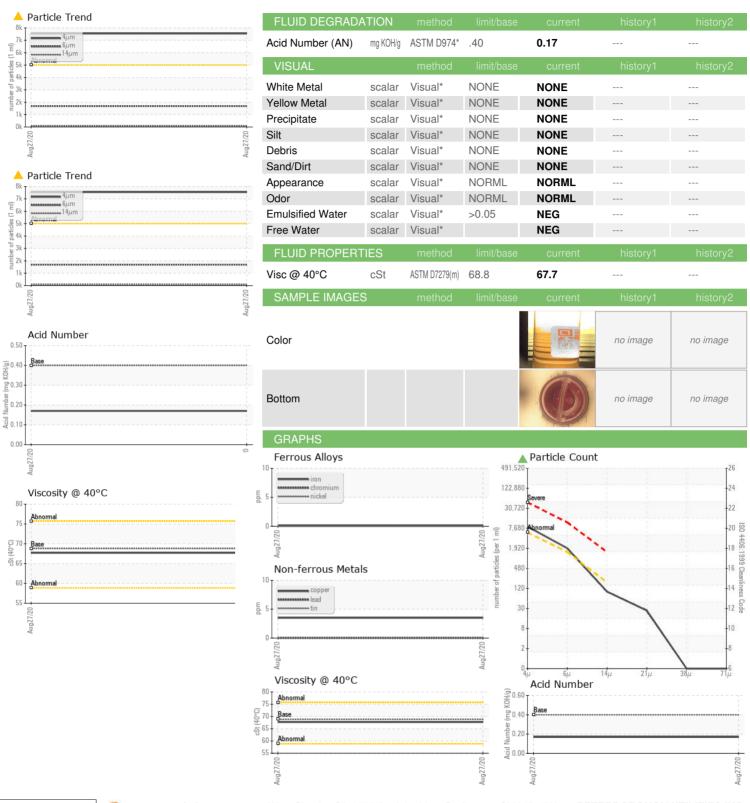



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number** Test Package

: WC0488631 : 02373510

: 5096958 : IND 2

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Recieved : 01 Sep 2020 : 02 Sep 2020 Diagnosed : Wes Davis

Diagnostician

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

PETERBOROUGH UTILITIES INC

1867 ASHBURNHAM DRIVE PETERBOROUGH, ON CA K9L 1P8

Contact: Nelson Ross nross@pui.ca T: (705)760-6119

F: (705)748-3138