




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**BOP CRANE**  
 Machine Id  
**Q-1705AMAINHOISTDRUM**  
 Component  
**Gearbox**  
 Fluid  
**GEAR OIL SAE 75W90 (--- GAL)**

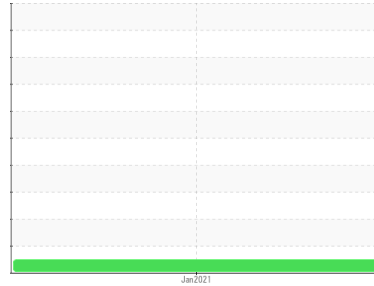

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.  
 NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0371118</b>	---	---
Sample Date	Client Info		<b>17 Jan 2021</b>	---	---
Machine Age	yrs	Client Info	<b>0</b>	---	---
Oil Age	yrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		<b>0</b>	---	---
Iron	ppm	ASTM D5185(m) >200	<b>7</b>	---	---
Chromium	ppm	ASTM D5185(m) >15	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185(m) >25	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185(m) >100	<b>4</b>	---	---
Copper	ppm	ASTM D5185(m) >200	<b>4</b>	---	---
Tin	ppm	ASTM D5185(m) >25	<b>&lt;1</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>4</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 400	<b>155</b>	---	---
Barium	ppm	ASTM D5185(m) 200	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m) 12	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m) 12	<b>&lt;1</b>	---	---
Calcium	ppm	ASTM D5185(m) 150	<b>8</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 1650	<b>1045</b>	---	---
Zinc	ppm	ASTM D5185(m) 125	<b>13</b>	---	---
Sulfur	ppm	ASTM D5185(m) 22500	<b>23237</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >50	<b>1</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>3</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 2.00	<b>3.20</b>	---	---



# OIL ANALYSIS REPORT

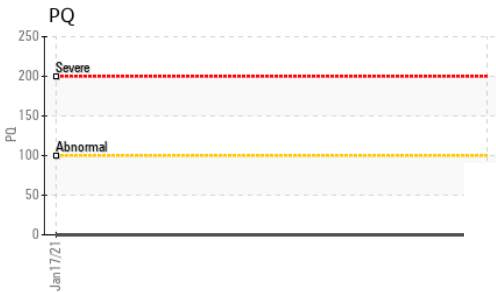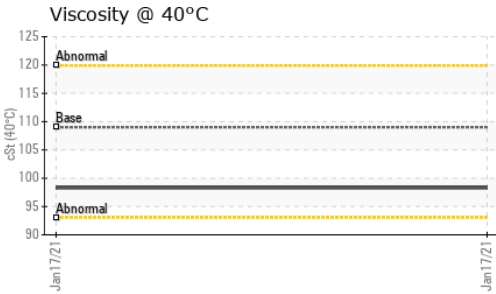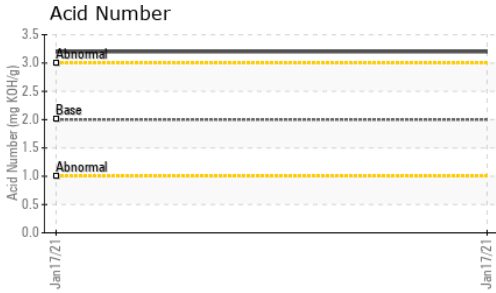






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	LIGHT	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	109	<b>98.3</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

### GRAPHS

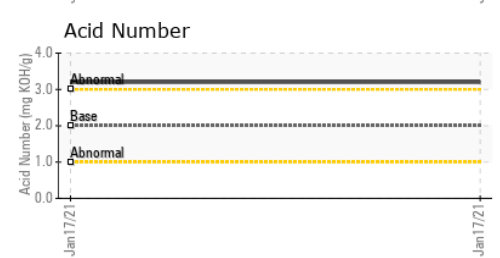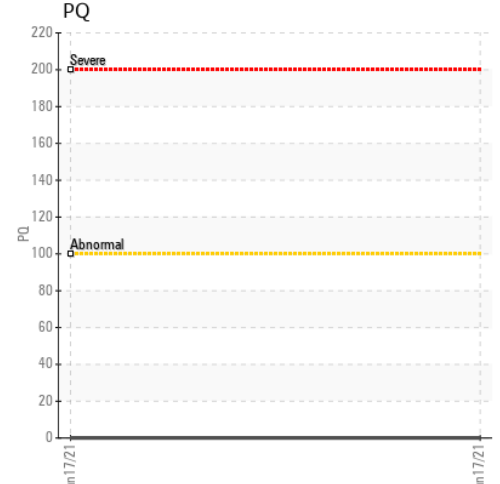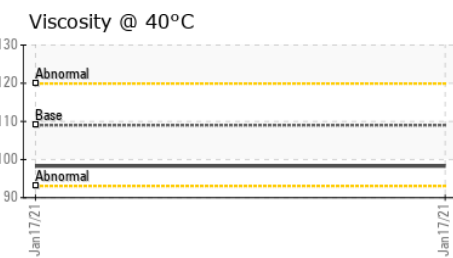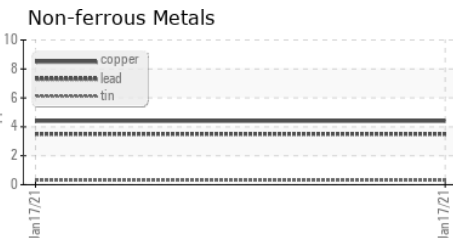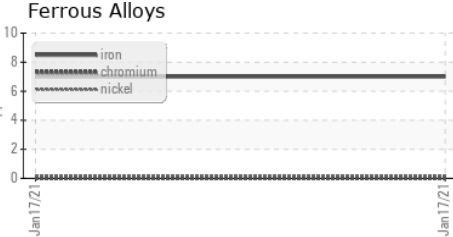

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0371118 **Recieved** : 18 Jan 2021  
**Lab Number** : **02398309** **Diagnosed** : 19 Jan 2021  
**Unique Number** : 5161770 **Diagnostician** : Kevin Marson  
**Test Package** : IND 2 ( Additional Tests: TAN Man )

**Parker Wellbore**  
 215 Water Street, Suite 802, PO Box 74  
 St. John's, NL  
 CA A1C 6C9  
 Contact: HMDC Material Control Coordinator  
 hmdc.material.control.coordinator@exxonmobil.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: