

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

PRESS 3 BEFORE FILTER

Hydraulic System

PETRO CANADA HYDREX AW 68 (--- GAL)

Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Mar2021		
SAMPLE INFORM	MATION	l method	limit/base	current	history1	history2
	VIATION		IIIIII/Dase			
Sample Number		Client Info		WC0495636		
Sample Date		Client Info		08 Mar 2021		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	0		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		<1		
Aluminum	ppm	ASTM D5185(m)	>20	<1		
Lead	ppm	ASTM D5185(m)	>20	0		
Copper	ppm	ASTM D5185(m)	>20	<1		
Tin	ppm	ASTM D5185(m)	>20	<1		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	<1		
Barium	ppm	ASTM D5185(m)	0	0		
Molybdenum	ppm	ASTM D5185(m)	0	0		
Manganese	ppm	ASTM D5185(m)	0	0		
Magnesium	ppm	ASTM D5185(m)	0	<1		
Calcium	ppm	ASTM D5185(m)	50	50		
Phosphorus	ppm	ASTM D5185(m)	330	302		
Zinc	ppm	ASTM D5185(m)	430	422		
Sulfur	ppm	ASTM D5185(m)	760	716		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	1		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
FLUID CLEANLIN	NESS _	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	2041		
Particles >6µm		ASTM D7647	>1300	359		
Particles >14µm		ASTM D7647	>160	23		
Particles >21µm		ASTM D7647	>40	6		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/16/12		

Contact/Location: Chris Mayr - SPE95BRA



OIL ANALYSIS REPORT

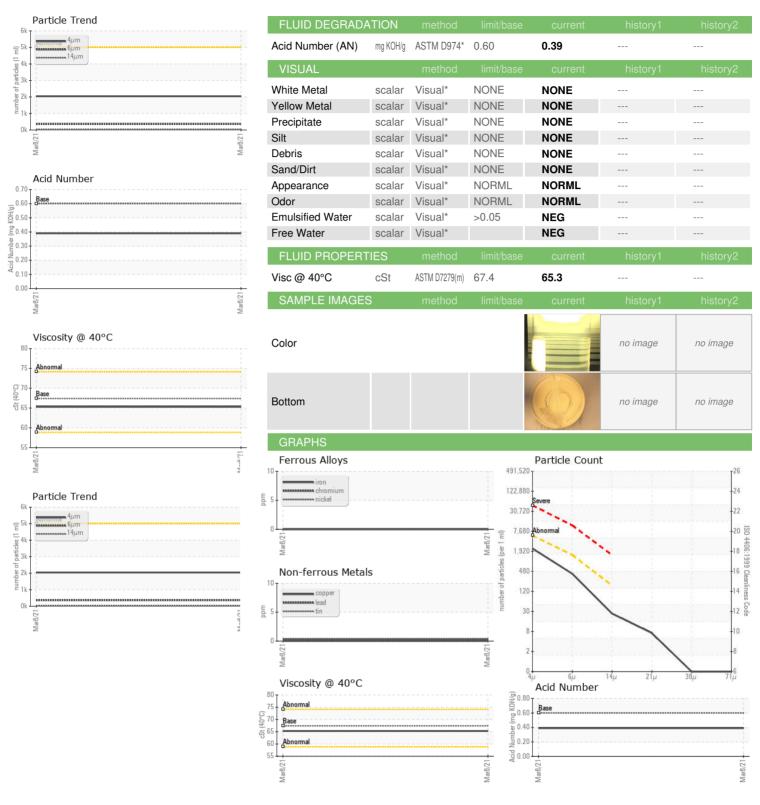



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No.

Lab Number : 02408687 Unique Number : 5188164 Test Package : IND 2

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : WC0495636 Received : 11 Mar 2021

Tested Diagnosed

: 12 Mar 2021 : 12 Mar 2021 - Wes Davis

SPECTRA ALUMINUM PRODUCTS INC. 95 REAGENS INDUSTRIAL PKWY BRADFORD, ON **CA L3Z 2A4**

> Contact: Chris Mayr cmayr@spectraaluminum.com

T: (905)778-8093 F: (905)778-8054

Page 2 of 2

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.