




PROBLEM SUMMARY

Sample Rating Trend

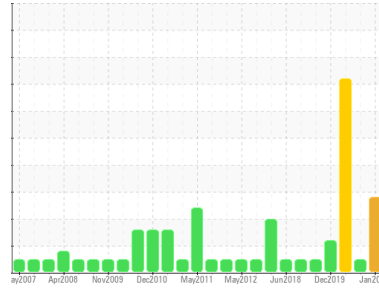

WATER




Machine Id
VIC-G-THBR

Component
Bearing

Fluid
ESSO TERESSO ISO 68 (2 LTR)

COMPONENT CONDITION SUMMARY

▲ Non-ferrous Metals

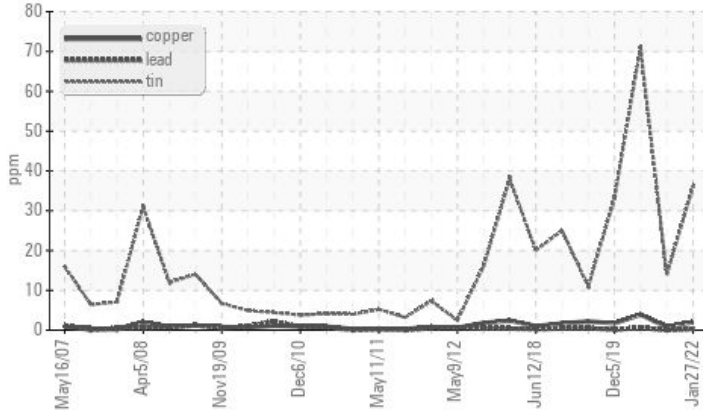

RECOMMENDATION

We advise that you check for the source of water entry. Check seals and/or filters for points of contaminant entry. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	NORMAL	SEVERE
Tin	ppm	ASTM D5185(m)	>27	▲ 36	14
Antimony	ppm	ASTM D5185(m)		▲ 2	1
Emulsified Water	scalar	Visual*	>2	▲ .5%	NEG
Free Water	scalar	Visual*		▲ 1%	NEG

Customer Id: NEWSTJ
 Sample No.: WC0327870
 Lab Number: 02473265
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Water Access	---	---	?	We advise that you check for the source of water entry.
Check Seals	---	---	?	Check seals and/or filters for points of contaminant entry.

HISTORICAL DIAGNOSIS

07 Jan 2021 Diag: Kevin Marson

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



18 Aug 2020 Diag: Kevin Marson

WEAR



We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. Tin ppm levels are severe. Iron and antimony ppm levels are abnormal. Bearing wear is indicated. The low ferrous density (PQ) index indicates the wear metal levels are due to corrosion. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

view report



05 Dec 2019 Diag: Kevin Marson

WEAR



We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. Iron and tin ppm levels are abnormal. Antimony ppm levels are noted. A sharp increase in the iron level is noted. Bearing wear is indicated. The low ferrous density (PQ) index indicates the wear metal levels are due to corrosion. The water content is negligible. There is no indication of any contamination in the component. The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

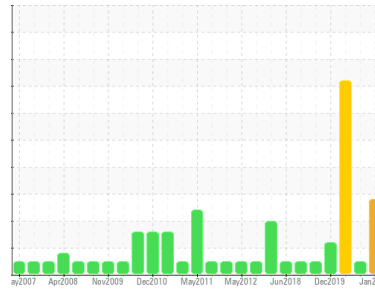

WATER



Machine Id
VIC-G-THBR

Component
Bearing

Fluid
ESSO TERESSO ISO 68 (2 LTR)

DIAGNOSIS

Recommendation

We advise that you check for the source of water entry. Check seals and/or filters for points of contaminant entry. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

Tin ppm levels are abnormal. Antimony ppm levels are noted. Bearing wear is indicated.

Contamination

There is a light concentration of water present in the oil. Free water present.

Fluid Condition

The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0327870	WC0328016	WC0327948
Sample Date	Client Info		27 Jan 2022	07 Jan 2021	18 Aug 2020
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	NORMAL	SEVERE

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		6	0	32
Iron	ppm	ASTM D5185(m) >63	25	12	▲ 87
Chromium	ppm	ASTM D5185(m)	0	0	<1
Nickel	ppm	ASTM D5185(m)	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	0	0	0
Silver	ppm	ASTM D5185(m)	0	0	<1
Aluminum	ppm	ASTM D5185(m) >2	0	0	<1
Lead	ppm	ASTM D5185(m) >161	<1	0	<1
Copper	ppm	ASTM D5185(m) >13	2	<1	4
Tin	ppm	ASTM D5185(m) >27	▲ 36	14	■ 71
Antimony	ppm	ASTM D5185(m)	▲ 2	1	▲ 6
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 4.5	<1	<1	<1
Barium	ppm	ASTM D5185(m) 0.4	0	0	0
Molybdenum	ppm	ASTM D5185(m) 0	0	0	0
Manganese	ppm	ASTM D5185(m)	<1	0	<1
Magnesium	ppm	ASTM D5185(m) 0	0	0	<1
Calcium	ppm	ASTM D5185(m) 0	<1	<1	<1
Phosphorus	ppm	ASTM D5185(m) 0.7	4	4	4
Zinc	ppm	ASTM D5185(m) 0	4	<1	6
Sulfur	ppm	ASTM D5185(m) 1315	221	215	514
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >12	<1	0	<1
Sodium	ppm	ASTM D5185(m)	0	0	0
Potassium	ppm	ASTM D5185(m) >20	<1	<1	<1


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 0.02	0.09	0.14	0.13




OIL ANALYSIS REPORT


Non-ferrous Metals

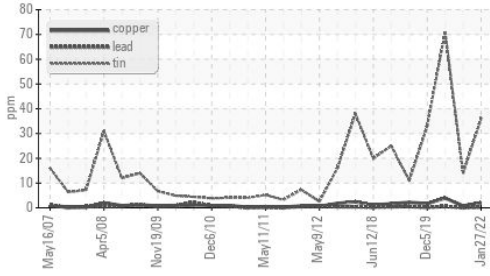


Acid Number

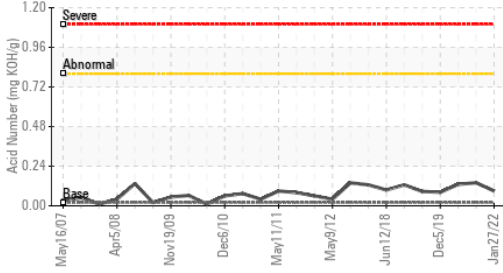

Viscosity @ 40°C

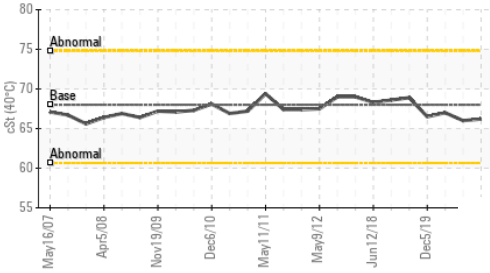


PQ

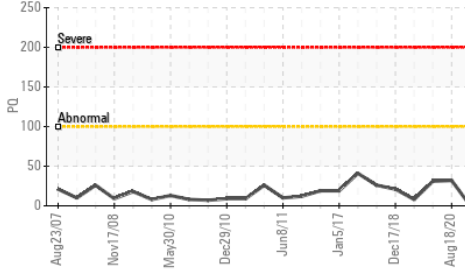

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	VLITE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	VLITE	NONE
Silt	scalar	Visual*	NONE	VLITE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	HAZY
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>2	▲ .5%	NEG
Free Water	scalar	Visual*		▲ 1%	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	68	66.2	66.0

SAMPLE IMAGES

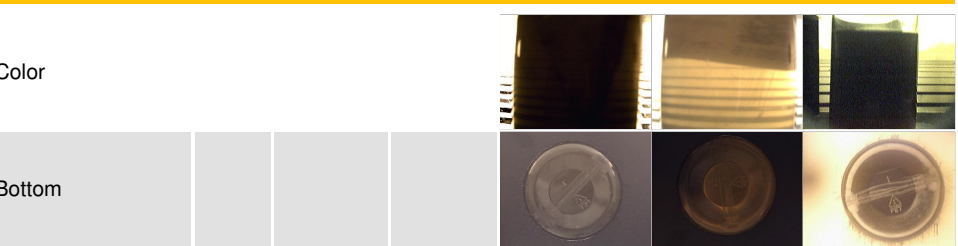


GRAPHS


Ferrous Alloys

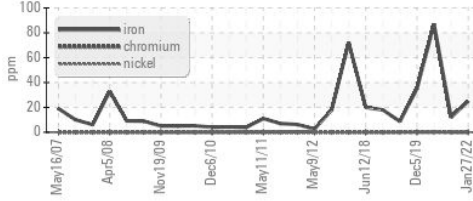


Non-ferrous Metals

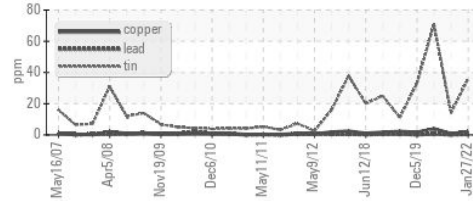


Viscosity @ 40°C

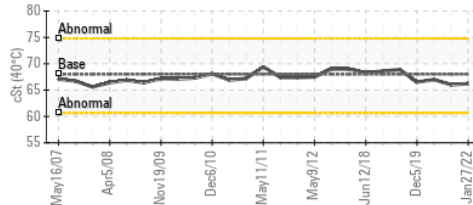

PQ

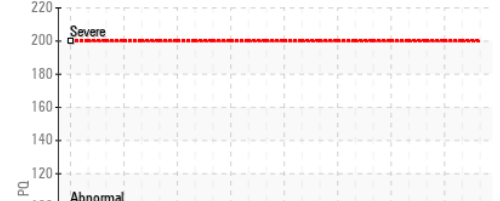

Acid Number

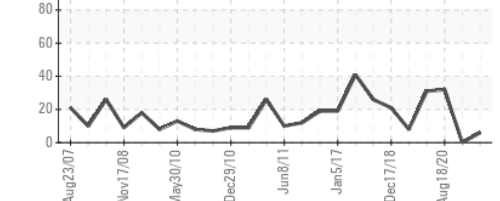

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
 Sample No. : WC0327870 Received : 22 Feb 2022
 Lab Number : 02473265 Diagnosed : 22 Feb 2022
 Unique Number : 5358188 Diagnostician : Kevin Marson
 Test Package : IND 2 (Additional Tests: TAN Man)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

NEWFOUNDLAND POWER INC.
 50 DUFFY PLACE, PO BOX 8910
 ST. JOHNS, NL
 CA A1B 3P6
 Contact: Paul Martin
 pmartin@newfoundlandpower.com
 T:
 F: (709)737-2926