




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

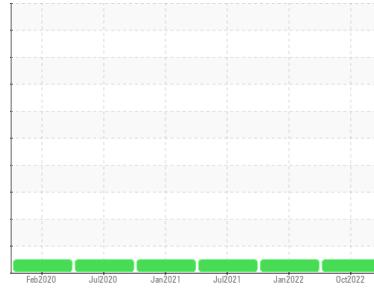

Machine Id  
**#2 CO2 Compressor**

Component  
**Reciprocating Compressor**

Fluid  
**PETRO CANADA COMPRO XL-R COMPRESSOR FLUID (40 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The water content is negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PP</b>	PP	PP
Sample Date	Client Info		<b>14 Oct 2022</b>	20 Jan 2022	10 Jul 2021
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		<b>0</b>	0	0
Iron	ppm	ASTM D5185(m) >50	<b>&lt;1</b>	<1	0
Chromium	ppm	ASTM D5185(m) >10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m) >25	<b>0</b>	0	0
Lead	ppm	ASTM D5185(m) >25	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185(m) >50	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Barium	ppm	ASTM D5185(m)	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Calcium	ppm	ASTM D5185(m)	<b>0</b>	<1	<1
Phosphorus	ppm	ASTM D5185(m) 460	<b>401</b>	517	523
Zinc	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Sulfur	ppm	ASTM D5185(m)	<b>300</b>	349	351
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	<b>0</b>	0	1
Sodium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Potassium	ppm	ASTM D5185(m) >20	<b>0</b>	<1	<1
Water	%	ASTM D6304* >0.1	<b>0.005</b>	---	---
ppm Water	ppm	ASTM D6304* >1000	<b>53.7</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 0.02	<b>0.06</b>	0.06	0.11



# OIL ANALYSIS REPORT


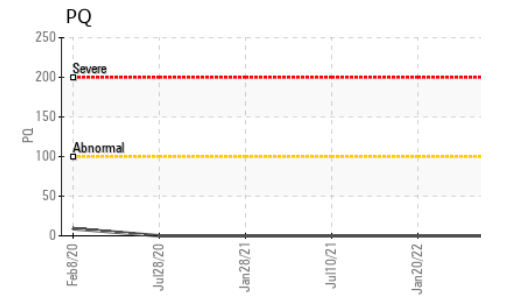
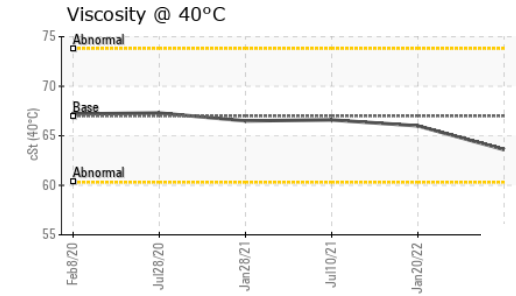
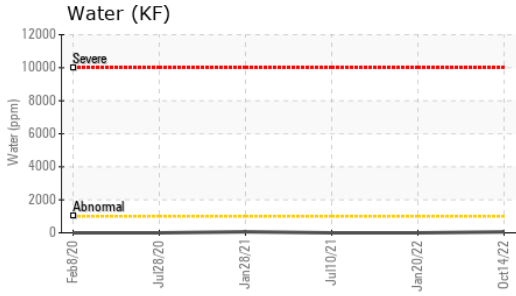
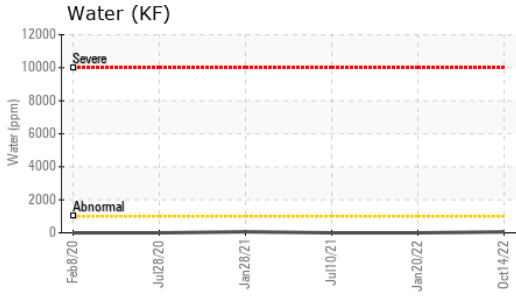


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	.2%	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	67.0	63.6	66.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

## GRAPHS

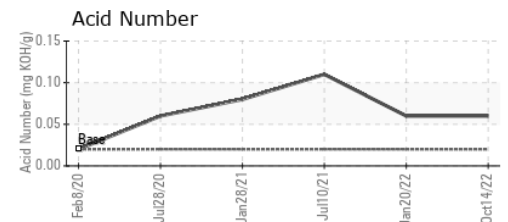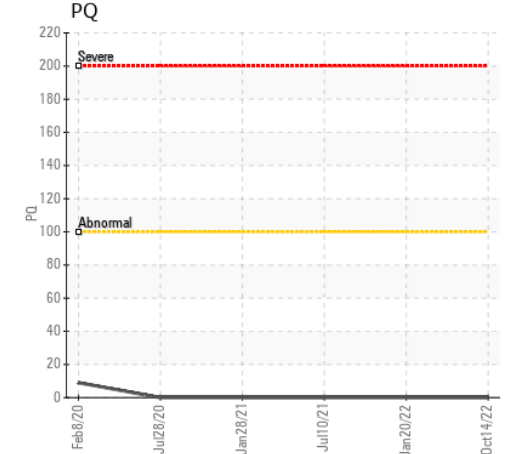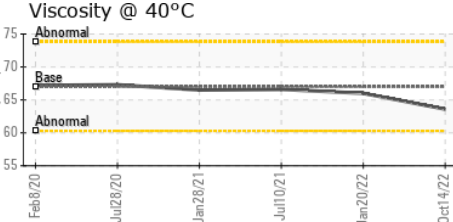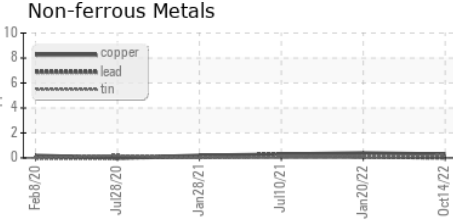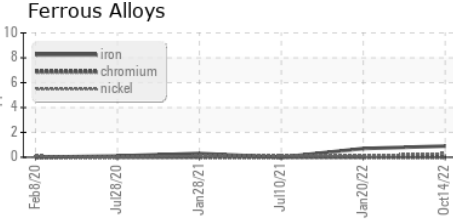

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PP **Received** : 25 Oct 2022  
**Lab Number** : 02518374 **Diagnosed** : 26 Oct 2022  
**Unique Number** : 5475354 **Diagnostician** : Wes Davis  
**Test Package** : IND 2 ( Additional Tests: KF, TAN Man )

**MOLSON TORONTO**  
 1 CARLINGVIEW DRIVE  
 TORONTO, ON  
 CA M9W 5E5  
 Contact: Brian Goddard  
 brian.goddard@molsoncoors.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.