

## **OIL ANALYSIS REPORT**

SAMPLE IN

Sample Rating Trend



# NO UNIT WC0764095

Component

Hydraulic System

Fluid

NOT GIVEN (--- GAL)

### DIAGNOSIS

#### Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

oer	Client Info	W	/C0764095					
NFORMATION	method	limit/base	current	h	į			
	Nov2022							
•								

SAMPLE INFORM	MATION	method	ilmii/base	current	nistory i	nistoryz
Sample Number		Client Info		WC0764095		
Sample Date		Client Info		24 Nov 2022		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
			12 24 /1		111	111
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<1		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>20	0		
Lead	ppm	ASTM D5185(m)	>20	0		
Copper	ppm	ASTM D5185(m)	>20	2		
Tin	ppm	ASTM D5185(m)	>20	<1		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
	200	ACTM DE10E(m)			,	,
Boron	ppm	ASTM D5185(m)		1		
Barium	ppm	ASTM D5185(m)		3		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		36		
Calcium	ppm	ASTM D5185(m) ASTM D5185(m)		283		
Phosphorus	ppm	. ,		311		
Zinc Sulfur	ppm	ASTM D5185(m)				
	ppm	ASTM D5185(m) ASTM D5185(m)		775		
Lithium	ppm	ASTIVI DOTOO(III)		<1		
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	2		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	244		
Particles >6µm		ASTM D7647	>1300	70		
Particles >14µm		ASTM D7647	>160	6		
Particles >21µm		ASTM D7647	>40	1		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	15/13/10		
FLUID DEGRADA	LION -	method	limit/base	current	history1	history2
T LOID DEGNADA	HON	method	- IIIIII base	- Carrent	- HISTOLY I	HISTOLYZ

Acid Number (AN)

mg KOH/g ASTM D974\*


33 --- ---

Report Id: FELNOR [WCAMIS] 02524908 (Generated: 11/02/2023 16:30:07) Rev: 1

Contact/Location: Marko Zapcic - FELNOR



## **OIL ANALYSIS REPORT**

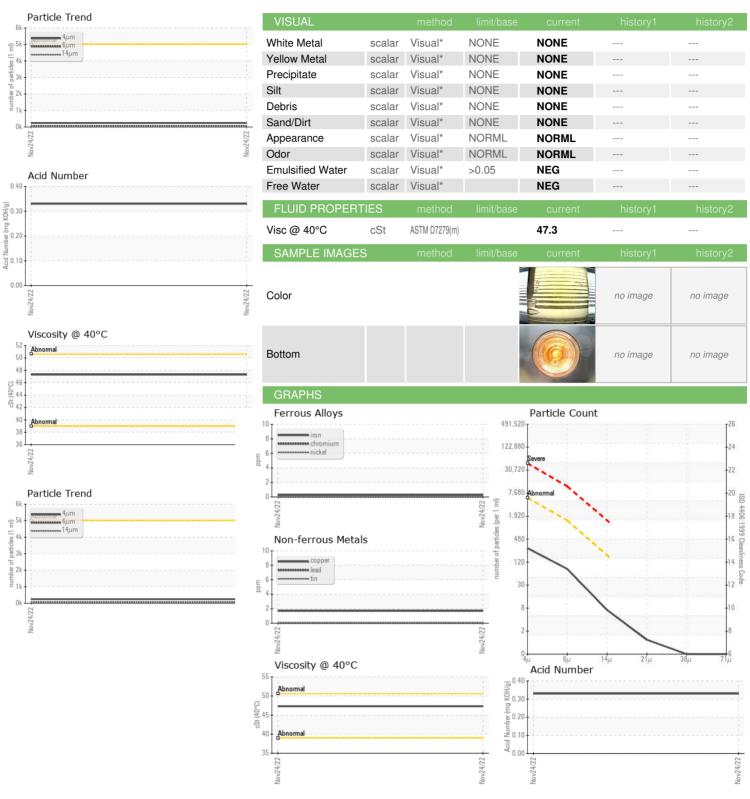



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number** 

Test Package : IND 2

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

: WC0764095 +02524908: 5489889

Received Diagnosed Diagnostician

: 25 Nov 2022 : 28 Nov 2022

: Wes Davis

**FELDCAMP EQUIPMENT LIMITED** 701 GRAHAM DRIVE NORTH BAY, ON CA P1B 9E6 Contact: Marko Zapcic marko@feldcamp.com

T: (705)472-5885 F: (705)472-2819

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.