


OIL ANALYSIS REPORT





20067 Component **Hydraulic System**

MONARCH ATF TYPE F (--- GAL)

Recommendation

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component(unconfirmed).


Fluid Condition

The condition of the oil is acceptable for the time in service.

				Dec2022		
SAMPLE INFORM	MATION	method	limit/base	current	history 1	history 2
Sample Number		Client Info		WC0713507		
Sample Date		Client Info		23 Dec 2022		
Machine Age	hrs	Client Info		1832		
Oil Age	hrs	Client Info		1832		
Oil Changed	0	Client Info		Not Changd		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185(m)	>20	7		
Chromium	ppm	ASTM D5185(m)	>10	0		
Nickel	ppm	ASTM D5185(m)	>10	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>10	<1		
Lead	ppm	ASTM D5185(m)	>10	5		
Copper	ppm	ASTM D5185(m)	>75	20		
Tin	ppm	ASTM D5185(m)	>10	1		
Antimony	ppm	ASTM D5185(m)	- 10	0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
	ррш					
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185(m)		48		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		<1		
Manganese	ppm	ASTM D5185(m)		<1		
Magnesium	ppm	ASTM D5185(m)		36		
Calcium	ppm	ASTM D5185(m)		64		
Phosphorus	ppm	ASTM D5185(m)		304		
Zinc	ppm	ASTM D5185(m)		168		
Sulfur	ppm	ASTM D5185(m)		901		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185(m)	>20	3		
Sodium	ppm	ASTM D5185(m)		1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
VISUAL		method	limit/base	current	history 1	history 2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*	>0.1	NEG		
Free Water	scalar	Visual*		NEG		
3:42:18) Rev: 1	2 30.01		Contact/L		uipment CG Gu	elph - CGEGUE



OIL ANALYSIS REPORT

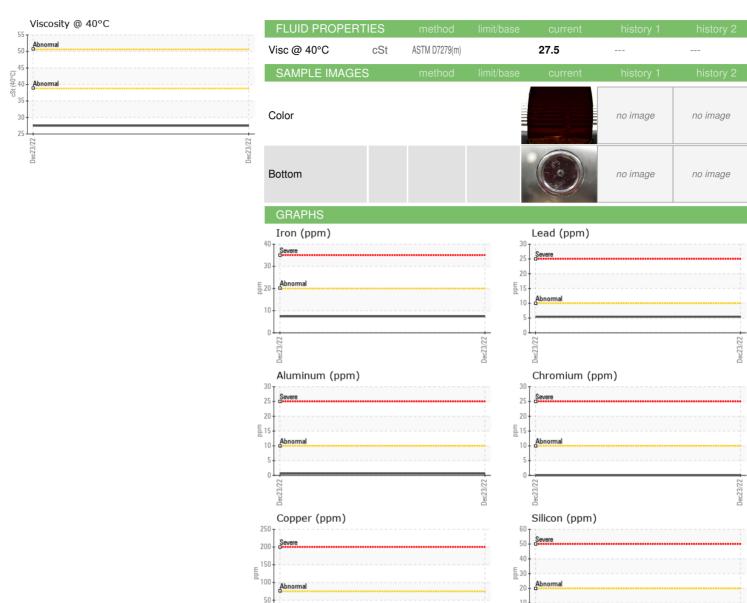





Laboratory Sample No. Lab Number Unique Number

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : 02531052

25

: WC0713507

Viscosity @ 40°C

: 5512051 Test Package : MOB 1

Received : 03 Jan 2023 Diagnosed : 03 Jan 2023 Diagnostician : Kevin Marson

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

C.G. EQUIPMENT

7367 Wellington Rd. 30, Unit A Guelph, ON

CA NOM 2TO Contact: CG Equipment CG Guelph

> cory@cgequipment.com T: (519)826-0550 F: (519)837-2055

Additives