




# PROBLEM SUMMARY



Sample Rating Trend

DEGRADATION

Area  
**#2 Slab Caster [3000630597]**  
 Machine Id  
**MOULD LEVEL HYD (STL001) (S/N 1000026618)**  
 Component  
**Hydraulic System**  
 Fluid  
**HOUGHTON HOUGHTON SAFE 616 (--- GAL)**

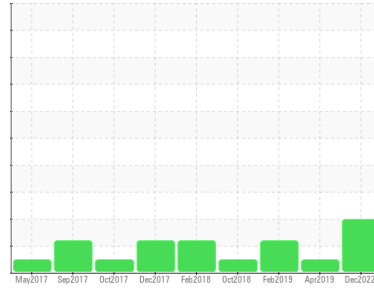

## COMPONENT CONDITION SUMMARY

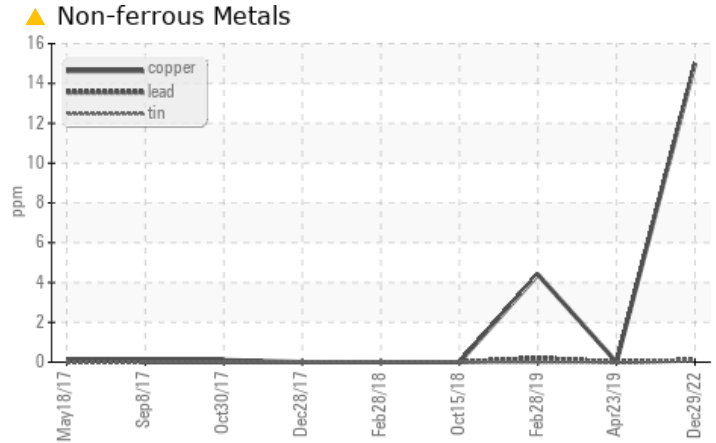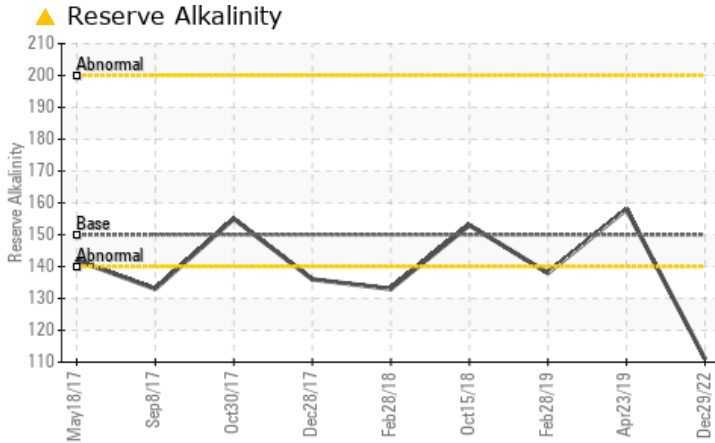

## RECOMMENDATION

Due to the low reserve alkalinity it is advised that you contact HOUGHTON to assist in restoring the proper amine concentration. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

## PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL	NORMAL	ABNORMAL
Copper	ppm ASTM D5185(m) >20	▲ 15	0	4
Alkiline Reserve (Oils)	ml KOH/g ASTM D1121* 150	▲ 111	158	▲ 138

Customer Id: ALGSSM  
 Sample No.: WC0644148  
 Lab Number: 02533588  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Bill Quesnel CLS,OMA II,MLA-III,LLA-I +1  
 (289)291-4641 x4641  
[Bill.Quesnel@wearcheck.com](mailto:Bill.Quesnel@wearcheck.com)

To change component or sample information:  
 Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Contact Required	---	---	?	Due to the low reserve alkalinity it is advised that you contact HOUGHTON to assist in restoring the proper amine concentration.
Information Required	---	---	?	NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

## HISTORICAL DIAGNOSIS

### 23 Apr 2019 Diag: Bill Quesnel

NORMAL



Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. Viscosity of sample indicates oil is within ISO 32 range, advise investigate. The AN level is acceptable for this fluid. The pH level of this fluid is within the acceptable limits. The reserve alkalinity of this fluid is acceptable. The water concentration level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 28 Feb 2019 Diag: Kevin Marson

DEGRADATION



Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. Viscosity of sample indicates oil is within ISO 32 range, advise investigate. The AN level is acceptable for this fluid. The pH level of this fluid is within the acceptable limits. The reserve alkalinity of this fluid is acceptable. The water concentration level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 15 Oct 2018 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The pH level of this fluid is within the acceptable limits. The reserve alkalinity of this fluid is acceptable. The water concentration level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

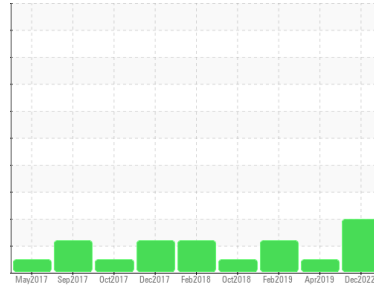

**DEGRADATION**



Area  
**#2 Slab Caster [3000630597]**  
 Machine Id  
**MOULD LEVEL HYD (STL001) (S/N 1000026618)**  
 Component  
**Hydraulic System**  
 Fluid  
**HOUGHTON HOUGHTON SAFE 616 (--- GAL)**

## DIAGNOSIS

### Recommendation

Due to the low reserve alkalinity it is advised that you contact HOUGHTON to assist in restoring the proper amine concentration. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

Copper ppm levels are noted. All other component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The reserve alkalinity of this fluid is lower than acceptable. The AN level is acceptable for this fluid. The pH level of this fluid is within the acceptable limits. The water concentration level is acceptable for this fluid.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0644148</b>	WC0309660	WC0309611
Sample Date	Client Info		<b>29 Dec 2022</b>	23 Apr 2019	28 Feb 2019
Machine Age	mths	Client Info	<b>0</b>	0	0
Oil Age	mths	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	NORMAL	ABNORMAL

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>20	<b>2</b>	0	0
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185(m)	>20	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>1</b>	0	2
Aluminum	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	0
Lead	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185(m)	>20	<b>▲ 15</b>	0	4
Tin	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>1</b>	0	2
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	<1
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)		<b>5</b>	<1	1
Calcium	ppm	ASTM D5185(m)		<b>4</b>	<1	<1
Phosphorus	ppm	ASTM D5185(m)		<b>2</b>	0	<1
Zinc	ppm	ASTM D5185(m)		<b>7</b>	0	0
Sulfur	ppm	ASTM D5185(m)		<b>19</b>	0	0
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	0

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	0	0
Sodium	ppm	ASTM D5185(m)		<b>56</b>	47	64
Potassium	ppm	ASTM D5185(m)	>20	<b>34</b>	6	27
Water	%	ASTM D6304*	>55	<b>40.34</b>	41.7	43.2
ppm Water	ppm	ASTM D6304*	>55000	<b>403432.1</b>	417000	432000


## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>4092</b>	240	120
Particles >6µm	ASTM D7647	>1300	<b>1196</b>	120	60
Particles >14µm	ASTM D7647	>160	<b>61</b>	30	7
Particles >21µm	ASTM D7647	>40	<b>17</b>	3	0
Particles >38µm	ASTM D7647	>10	<b>2</b>	0	0
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>19/17/13</b>	15/14/12	14/13/10




# OIL ANALYSIS REPORT

### ▲ Reserve Alkalinity

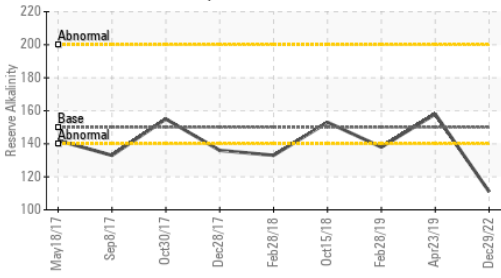

### ▲ Non-ferrous Metals

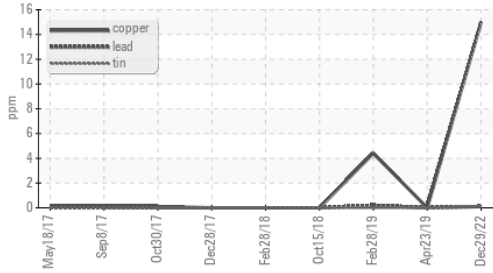

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	<b>5.77</b>	5.21	4.76
Alkiline Reserve (Oils)	ml KOH/g	ASTM D1121*	<b>▲ 111</b>	158	<b>▲ 138</b>


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>55	NEG	>10%
Free Water	scalar	Visual*	NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
pH	Scale 0-14	ASTM D1287*	<b>9.09</b>	9.44	9.25
Visc @ 40°C	cSt	ASTM D7279(m)	<b>38.3</b>	38.5	38.2


### SAMPLE IMAGES

	method	limit/base	current	history1	history2
Color					
Bottom					
PrtFilter			no image		


### Particle Count

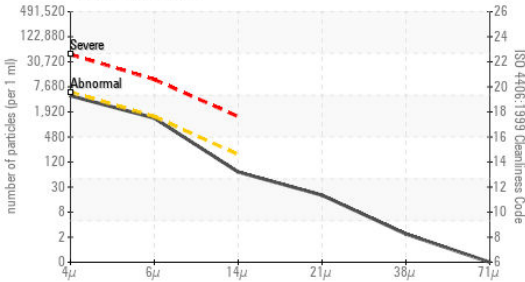

### Acid Number

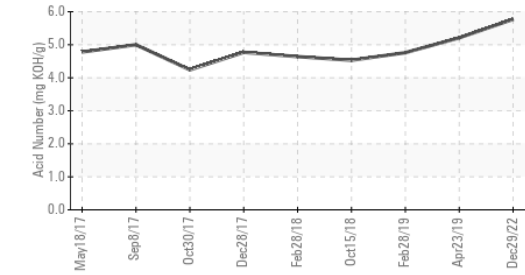

### Water (KF)

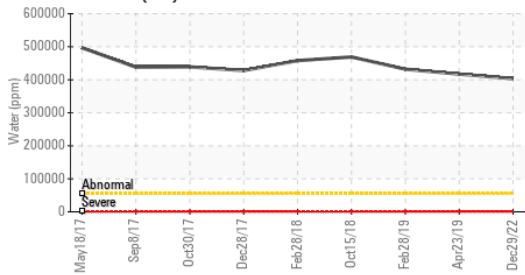

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **ALGOMA STEEL INC. - STORES DEPT.**  
**Sample No.** : WC0644148 **Received** : 16 Jan 2023  
**Lab Number** : **02533588** **Diagnosed** : 18 Jan 2023  
**Unique Number** : 5514587 **Diagnostician** : Bill Quesnel  
**Test Package** : IND 2 ( Additional Tests: KF, pH, ReserveAlk, TAN Man )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

301 WALLACE TERRACE  
 SAULT STE MARIE, ON  
 CA P6C 1K8  
 Contact: Algoma Reliability  
 algomareliability@algoma.com  
 T: (705)206-1059  
 F: (705)945-3585