



# COOLANT REPORT

Sample Rating Trend


WEAR



Machine Id  
**TJ024596**

Component  
**Coolant**

Fluid  
**CONVENTIONAL COOLANT (--- GAL)**

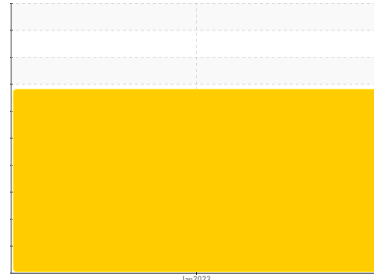

## DIAGNOSIS

### Recommendation

We recommend drain system, and refill with 50/50 antifreeze water mixture. We advise that you replenish the supplemental coolant additives (SCAs) and add per manufacturer's specifications. We recommend an early resample to monitor this condition.

### Corrosion

The iron level is high indicating rust in the system which clogs the cooling system.

### Contaminants

There is no indication of any contamination in the coolant.

### Coolant Condition

The coolant is cloudy indicating either an overconcentration of coolant additives, or a mixing of incompatible coolant technologies. The nitrite level is acceptable. The pH level of this fluid is within the acceptable limits.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0358488</b>	---	---
Sample Date	Client Info			<b>09 Jan 2023</b>	---	---
Machine Age	hrs	Client Info		<b>777</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>Not Chngd</b>	---	---
Sample Status				<b>SEVERE</b>	---	---

PHYSICAL TEST RESULTS		method	limit/base	current	history1	history2
Specific Gravity	ASTM D1298*			<b>1.082</b>	---	---
pH	Scale 0-14	ASTM D1287*	9.5	<b>8.16</b>	---	---
Nitrites	ppm	Alcan Test Kit*	1500	<b>2400</b>	---	---
Reserve Alkalinity	Scale 0-20	ASTM D1121*	8.5	<b>2.8</b>	---	---
Percentage Glycol	%	ASTM D3321*	50	<b>62.6</b>	---	---
Freezing Point	°C	ASTM D3321*	-40	<b>-61</b>	---	---
Carboxylate				---	---	---

CORROSION INHIBITORS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		<b>36</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>172</b>	---	---
Boron	ppm	ASTM D5185(m)		<b>237</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>257</b>	---	---

CORROSION		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>15	<b>44</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>10	<b>2</b>	---	---
Copper	ppm	ASTM D5185(m)	>10	<b>4</b>	---	---
Lead	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Tin	ppm	ASTM D5185(m)	>10	<b>1</b>	---	---
Silver	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>17</b>	---	---

CARRIER SALTS		method	limit/base	current	history1	history2
Sodium	ppm	ASTM D5185(m)		<b>1377</b>	---	---
Potassium	ppm	ASTM D5185(m)		<b>2226</b>	---	---

SCALE POTENTIAL		method	limit/base	current	history1	history2
Calcium	ppm	ASTM D5185(m)	>100	<b>3</b>	---	---
Magnesium	ppm	ASTM D5185(m)	>40	<b>1</b>	---	---
Hardness	mg/L CaCO3	In-house*	<75	<b>12</b>	---	---

VISUAL		method	limit/base	current	history1	history2
Coolant Color	Visual*	Green		<b>Green</b>	---	---
Coolant Appearance	Visual*	Clear		<b>Cloudy</b>	---	---

Color					no image	no image
Bottom					no image	no image




# COOLANT REPORT

## Iron/Tin/Silver




## GRAPHS


## Iron/Tin/Silver

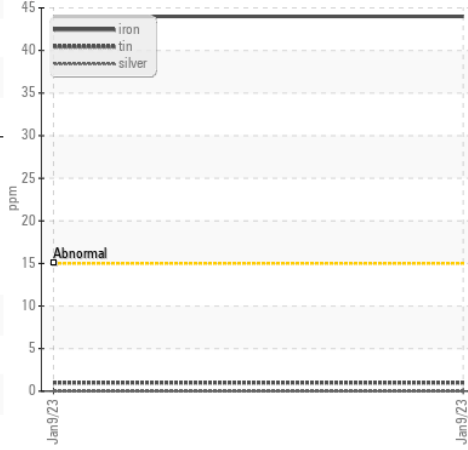


## Reserve Alkalinity

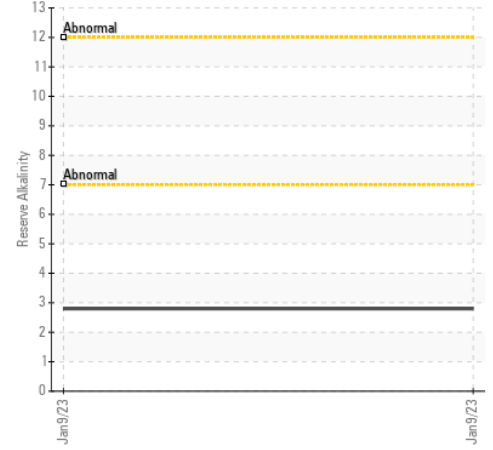


## Nitrites

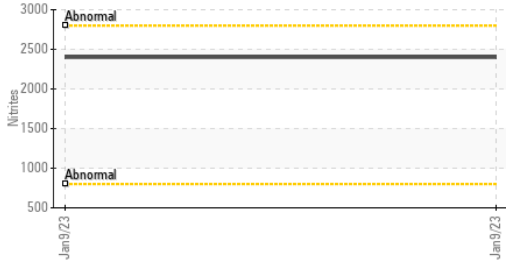


## Copper/Aluminum/Lead

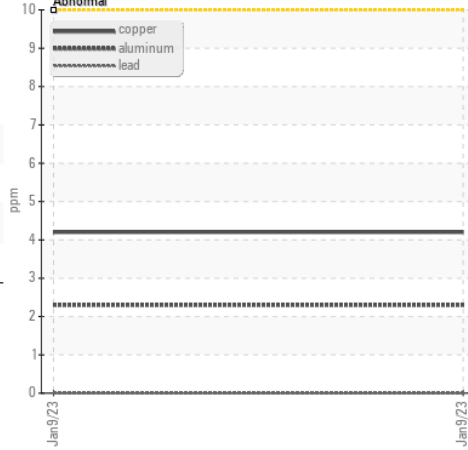


## Freeze Point

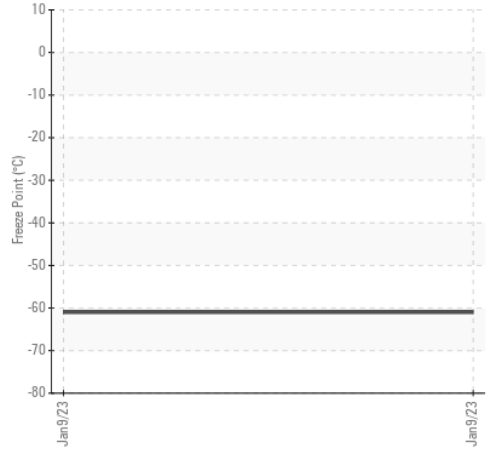


## PQ

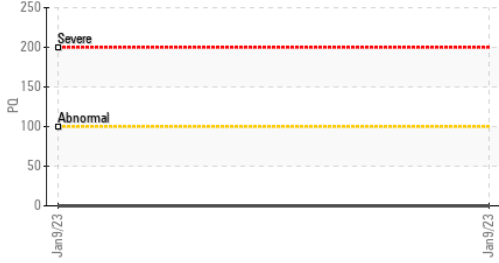

## pH

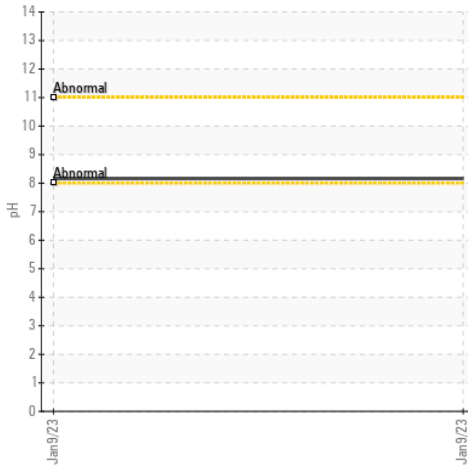

## Nitrites

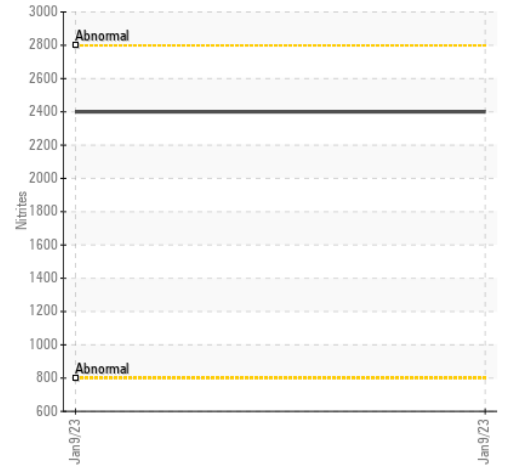

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0358488 **Received** : 17 Jan 2023  
**Lab Number** : 02533865 **Diagnosed** : 18 Jan 2023  
**Unique Number** : 5514864 **Diagnostician** : Bill Quesnel  
**Test Package** : COOL ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**GENREP LTD.**  
 121 WATLINE AVENUE  
 MISSISSAUGA, ON  
 CA L4Z 1P2  
 Contact: Amit Singh  
 asingh@genrep.com  
 T: (905)502-9950  
 F: (905)502-9960