



# OIL ANALYSIS REPORT

Sample Rating Trend

ISO



Area  
**(ZONE3) BRUCE A/4/32110**  
 Machine Id  
**4-32110-P1-PM OB Brg**  
 Component  
**Outboard Bearing**  
 Fluid  
**MOBIL DTE 732 (--- GAL)**



## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

### Contaminants

Particles >4µm are abnormally high. Particles >6µm and oil cleanliness are abnormally high. The water content is negligible. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

### Oil Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0718969</b>	---	---
Sample Date	Client Info	<b>03 Nov 2022</b>	---	---
Machine Age	hrs Client Info	<b>0</b>	---	---
Oil Age	hrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185(m)	>10	<b>&lt;1</b>	---	---
Chromium ppm ASTM D5185(m)	>5	<b>0</b>	---	---
Nickel ppm ASTM D5185(m)	>5	<b>0</b>	---	---
Titanium ppm ASTM D5185(m)	>5	<b>0</b>	---	---
Silver ppm ASTM D5185(m)		<b>0</b>	---	---
Aluminum ppm ASTM D5185(m)	>5	<b>&lt;1</b>	---	---
Lead ppm ASTM D5185(m)	>5	<b>2</b>	---	---
Copper ppm ASTM D5185(m)	>5	<b>&lt;1</b>	---	---
Tin ppm ASTM D5185(m)	>5	<b>0</b>	---	---
Antimony ppm ASTM D5185(m)		<b>&lt;1</b>	---	---
Vanadium ppm ASTM D5185(m)		<b>0</b>	---	---
Beryllium ppm ASTM D5185(m)		<b>0</b>	---	---
Cadmium ppm ASTM D5185(m)		<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185(m)		<b>&lt;1</b>	---	---
Barium ppm ASTM D5185(m)		<b>0</b>	---	---
Molybdenum ppm ASTM D5185(m)		<b>0</b>	---	---
Manganese ppm ASTM D5185(m)		<b>0</b>	---	---
Magnesium ppm ASTM D5185(m)		<b>0</b>	---	---
Calcium ppm ASTM D5185(m)		<b>0</b>	---	---
Phosphorus ppm ASTM D5185(m)		<b>&lt;1</b>	---	---
Zinc ppm ASTM D5185(m)		<b>4</b>	---	---
Sulfur ppm ASTM D5185(m)		<b>42</b>	---	---
Lithium ppm ASTM D5185(m)		<b>&lt;1</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185(m)	>5	<b>&lt;1</b>	---	---
Sodium ppm ASTM D5185(m)	>5	<b>2</b>	---	---
Potassium ppm ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Water % ASTM D6304*	>0.005	<b>0.001</b>	---	---
ppm Water ppm ASTM D6304*	>50	<b>14.0</b>	---	---






## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>5000	<b>▲ 17936</b>	---	---
Particles >6µm ASTM D7647	>1300	<b>▲ 3014</b>	---	---
Particles >14µm ASTM D7647	>320	<b>91</b>	---	---
Particles >21µm ASTM D7647	>80	<b>14</b>	---	---
Particles >38µm ASTM D7647	>20	<b>0</b>	---	---
Particles >71µm ASTM D7647	>4	<b>0</b>	---	---
Oil Cleanliness ISO 4406 (c)	>19/17/15	<b>▲ 21/19/14</b>	---	---





# OIL ANALYSIS REPORT

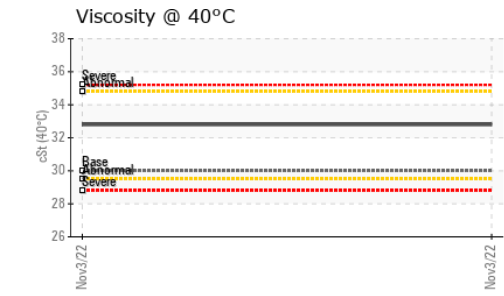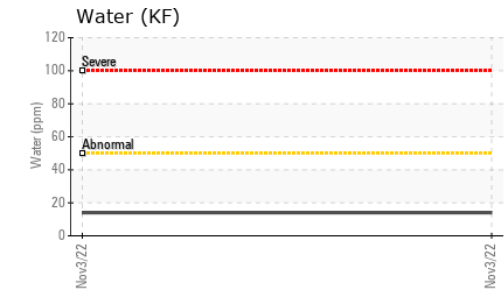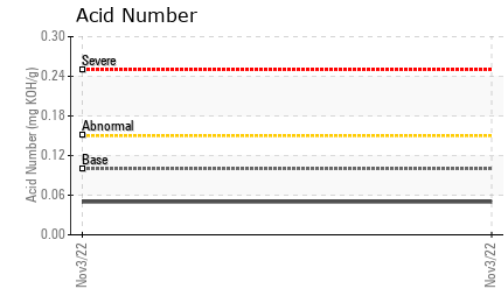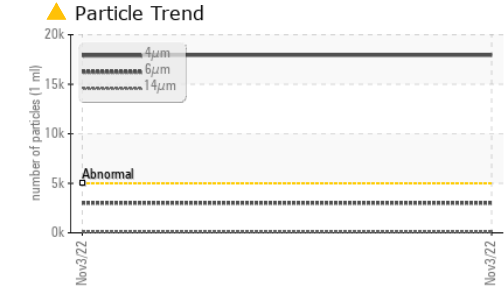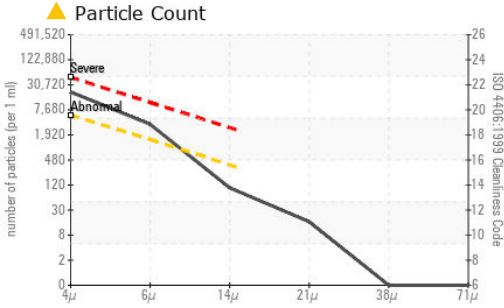

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0718969  
**Lab Number** : 02534093  
**Unique Number** : 5515092  
**Test Package** : IND 2 ( Additional Tests: A-FERR, BottomAnalysis, DR-FERR, FILTERPATCH, TAN M)

**Bruce Power - Bruce A PdM**  
 P.O.Box 1540, 177 Tie Road., RM-222 U2 Column 2N11 615  
 Tiverton, ON  
 CA N0G 2T0  
 Contact: Pierre Adouki  
 pierre.adouki@brucepower.com


To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

FLUID DEGRADATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	0.10	<b>0.05</b>	---	---

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.005	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	30.0	<b>32.8</b>	---	---




SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				<i>no image</i>	<i>no image</i>
Bottom				<i>no image</i>	<i>no image</i>
PrtFilter				<i>no image</i>	<i>no image</i>





# FERROGRAPHY REPORT

Area  
**(ZONE3) BRUCE A/4/32110**  
 Machine Id  
**4-32110-P1-PM OB Brg**  
 Component  
**Outboard Bearing**  
 Fluid  
**MOBIL DTE 732 (--- GAL)**

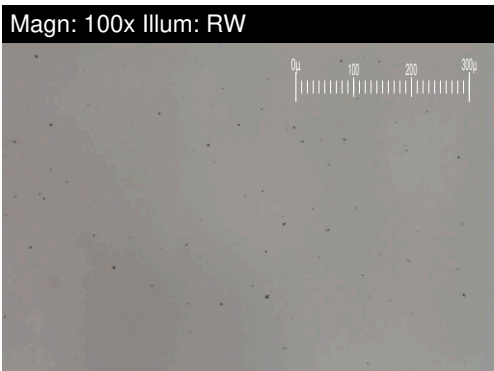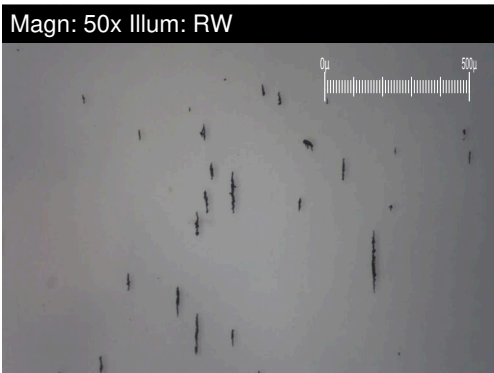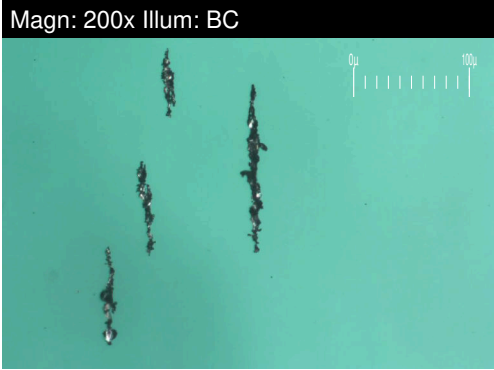


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		<b>6.5</b>	---	---
Small Particles		DR-Ferr*		<b>3.7</b>	---	---
Total Particles		DR-Ferr*	>---	<b>10.2</b>	---	---
Large Particles Percentage	%	DR-Ferr*		<b>27.5</b>	---	---
Severity Index		DR-Ferr*		<b>18</b>	---	---

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		<b>3</b>		
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		<b>1</b>		
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*				
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		<b>1</b>		
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		<b>1</b>		

### WEAR

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

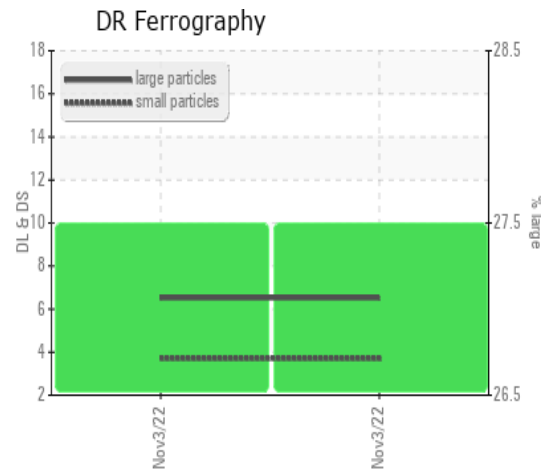

*This page left intentionally blank*