




PROBLEM SUMMARY

Sample Rating Trend

ISO

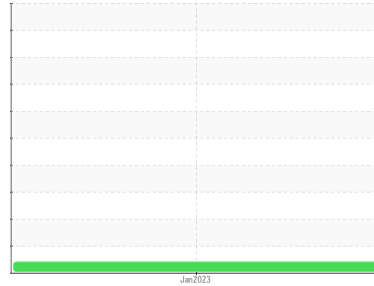

Area

[1000880068]

Machine Id

AIRBUS C-GOIH YELLOW (S/N 9198)

Component


Hydraulic System

Fluid

SKYDROL LD-4 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Count

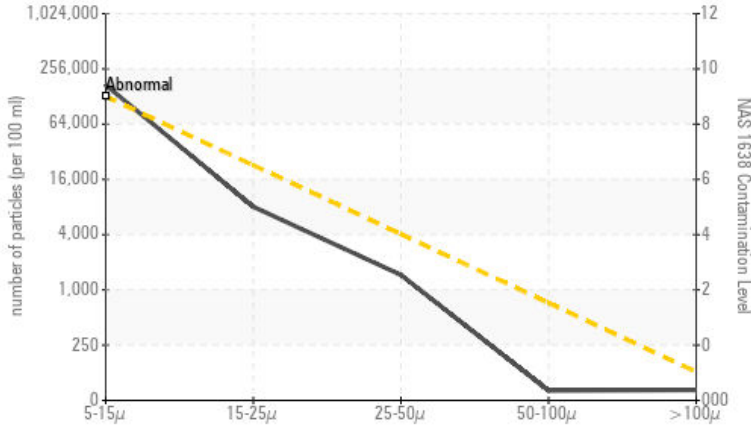

RECOMMENDATION

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

PROBLEMATIC TEST RESULTS

Sample Status	ABNORMAL		---	---
Particles 5-15µm	count	NAS 1638	>128000	▲ 170337

Customer Id: KELMOU
 Sample No.: PP
 Lab Number: 02534169
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Bill Quesnel CLS,OMA II,MLA-III,LLA-I +1
 (289)291-4641 x4641
Bill.Quesnel@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Information Required	---	---	?	NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

ISO




Area
[1000880068]

Machine Id
AIRBUS C-GOIH YELLOW (S/N 9198)

Component
Hydraulic System

Fluid
SKYDROL LD-4 (--- GAL)

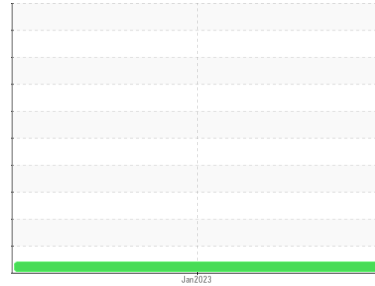

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

Particles 5-15µm are abnormally high. The water content is negligible. The system cleanliness is above the acceptable limit for the target SAE AS4059 (replaces NAS 1638) cleanliness code.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PP	---	---
Sample Date	Client Info			17 Jan 2023	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	2	---	---
Chromium	ppm	ASTM D5185(m)	>20	0	---	---
Nickel	ppm	ASTM D5185(m)	>20	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	<1	---	---
Lead	ppm	ASTM D5185(m)	>20	0	---	---
Copper	ppm	ASTM D5185(m)	>20	1	---	---
Tin	ppm	ASTM D5185(m)	>20	0	---	---
Antimony	ppm	ASTM D5185(m)		<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		8	---	---





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	3	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)	0	0	---	---
Calcium	ppm	ASTM D5185(m)	0	3	---	---
Phosphorus	ppm	ASTM D5185(m)	20000	27381	---	---
Zinc	ppm	ASTM D5185(m)	0	2	---	---
Sulfur	ppm	ASTM D5185(m)	1900	972	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	9	---	---
Sodium	ppm	ASTM D5185(m)		5	---	---
Potassium	ppm	ASTM D5185(m)	>20	25	---	---
Chlorine Content	ppm	NAA Method*		162	---	---
Water	%	ASTM D6304*	>0.6	0.529	---	---
ppm Water	ppm	ASTM D6304*	>6000	5297.4	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Oil Cleanliness		ISO 4406 (c)	>9	20/18/14	---	---
Particles 5-15µm	count	NAS 1638	>128000	▲ 170337	---	---
Particles 15-25µm	count	NAS 1638	>22800	8052	---	---
Particles 25-50µm	count	NAS 1638	>4050	1456	---	---
Particles 50-100µm	count	NAS 1638	>720	44	---	---
Particles >100µm	count	NAS 1638	>128	47	---	---
NAS 1638	Class	NAS 1638	>9	10	---	---



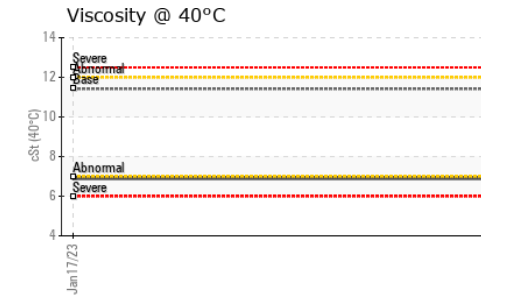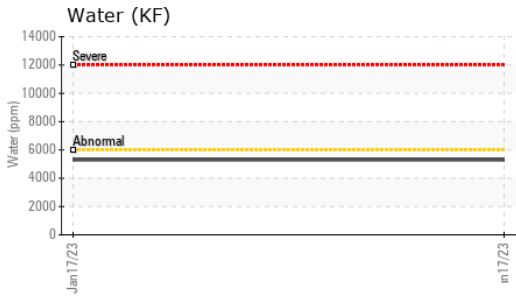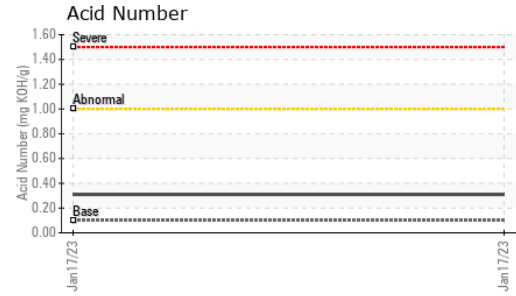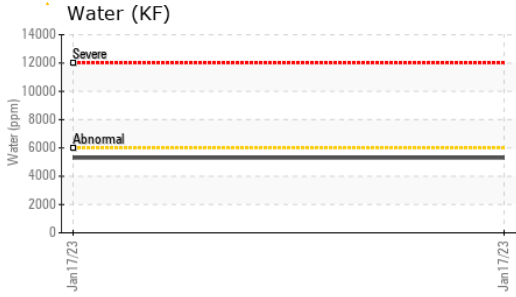

OIL ANALYSIS REPORT








FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.10	0.31	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.6	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	11.42	6.9	---	---
Resistivity	Gohm/cm	ASTM D1169(e)*		<0.2	---	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image

GRAPHS

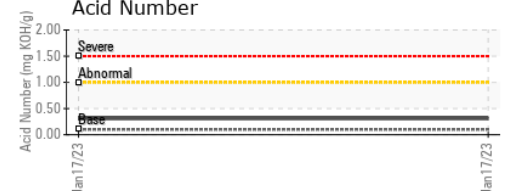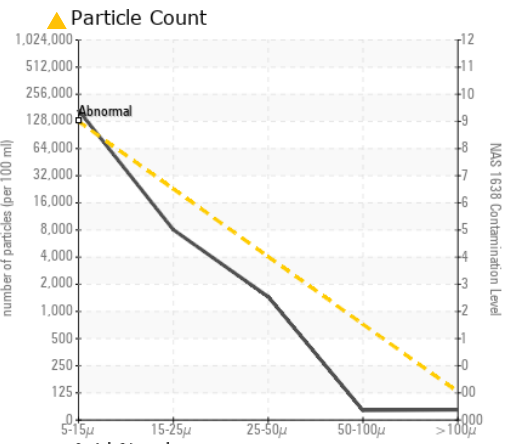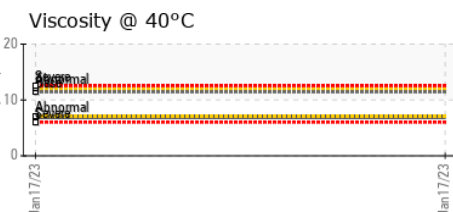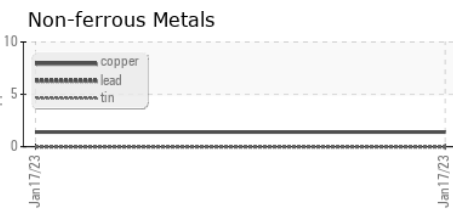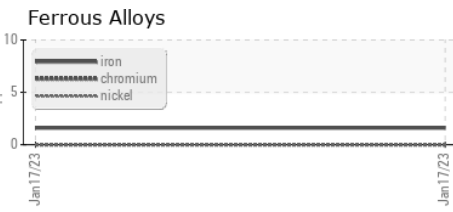

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PP **Received** : 18 Jan 2023
Lab Number : 02534169 **Diagnosed** : 13 Feb 2023
Unique Number : 5515168 **Diagnostician** : Bill Quesnel
Test Package : IND 2 (Additional Tests: ChlorineXRF, KF, PrtCountNAS, Resistivity, TAN Man)

KF Aero
 9500 Airport Road
 Mount Hope, ON
 CA L0R 1W0
 Contact: Helen Krzywicki
 h.krzywicki@kfaero.ca
 T: (905)679-3313
 F: (905)679-4921

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.