

OIL ANALYSIS REPORT

Sample Rating Trend



BDE - UNIT 7 TURBINE

Bearing Fluid NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

Viscosity of sample indicates oil is within ISO 46 range, advise investigate. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Jan 2023		
SAMPLE INFORM	IATION	method	limit/base	current	history 1	history 2
Sample Number		Client Info		WC0642169		
Sample Date		Client Info		29 Jan 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history 1	history 2
PQ		ASTM D8184*		0		
Iron	ppm	ASTM D5185(m)	>20	<1		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>20	0		
Lead	ppm	ASTM D5185(m)	>20	<1		
Copper	ppm	ASTM D5185(m)	>20	0		
Tin	ppm	ASTM D5185(m)	>20	<1		
Antimony	ppm	ASTM D5185(m)		<1		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185(m)		0		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		0		
Calcium	ppm	ASTM D5185(m)		0		
Phosphorus	ppm	ASTM D5185(m)		4		
Zinc	ppm	ASTM D5185(m)		1		
Sulfur	ppm	ASTM D5185(m)		189		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185(m)	>15	5		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	0		
FLUID CLEANLIN	ESS	method	limit/base	current	history 1	history 2
Particles >4µm		ASTM D7647	>10000	220		
Particles >6µm		ASTM D7647	>2500	45		
		ACTM D7647	>160	6		
Particles >14µm		ASTM D7647	2100	v		
Particles >14μm Particles >21μm		ASTM D7647 ASTM D7647		3		
Particles >21µm		ASTM D7647	>40 >10	3		
Particles >21µm Particles >38µm		ASTM D7647 ASTM D7647	>40 >10	3 1		



0

80 75 70 ු 65 € € 60 · Ab

> 40 lan 29/23

20

150

50

Π

Ê¹⁰⁾

6

4)

2

n

回認

articles (1 8k C/bCue

0

PQ

Abnorma 100

Particle Trend

.

Viscosity @ 40°C

OIL ANALYSIS REPORT


mg KOH/g


ASTM D974*

FLUID DEGRADATION

Acid Number (AN)

VISUAL

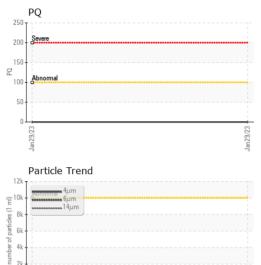

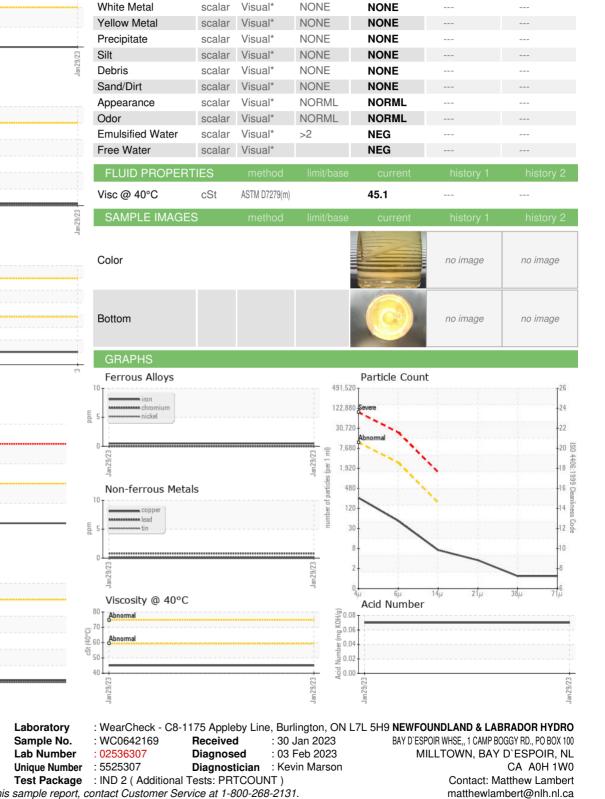

0.07

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Report Id: NEWMIL [WCAMIS] 02536307 (Generated: 07/04/2023 09:20:04) Rev: 1

CALA

ISO 17025:2017 Accredited

Laboratory

Contact/Location: Matthew Lambert - NEWMIL

T: (709)882-3126

F: (709)882-3161