




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

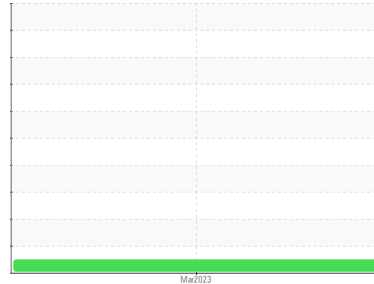

Machine Id  
**AIRBUS N316FA YELLOW**  
 Component  
**Hydraulic System**  
 Fluid  
**SKYDROL LD-4 (--- GAL)**

## DIAGNOSIS

### Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal.

### Contamination

The water content is negligible. There is no indication of any contamination in the oil. The system and fluid cleanliness is acceptable.

### Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0763593</b>	---	---
Sample Date	Client Info		<b>06 Mar 2023</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >20	<b>3</b>	---	---
Chromium	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185(m) >20	<b>3</b>	---	---
Tin	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>6</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	<b>2</b>	---	---
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m) 0	<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m) 0	<b>&lt;1</b>	---	---
Calcium	ppm	ASTM D5185(m) 0	<b>59</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 20000	<b>30250</b>	---	---
Zinc	ppm	ASTM D5185(m) 0	<b>3</b>	---	---
Sulfur	ppm	ASTM D5185(m) 1900	<b>914</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS






	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	<b>2</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>4</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>28</b>	---	---
Water	%	ASTM D6304* >0.6	<b>0.195</b>	---	---
ppm Water	ppm	ASTM D6304* >6000	<b>1953.4</b>	---	---

## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles 5-15µm	count	NAS 1638 >64000	<b>35840</b>	---	---
Particles 15-25µm	count	NAS 1638 >11400	<b>2377</b>	---	---
Particles 25-50µm	count	NAS 1638 >2025	<b>1412</b>	---	---
Particles 50-100µm	count	NAS 1638 >360	<b>88</b>	---	---
Particles >100µm	count	NAS 1638 >64	<b>59</b>	---	---
NAS 1638	Class	NAS 1638 >8	<b>8</b>	---	---



# OIL ANALYSIS REPORT

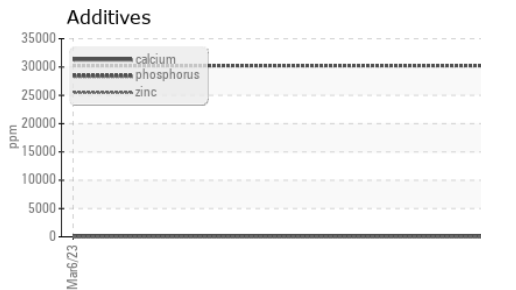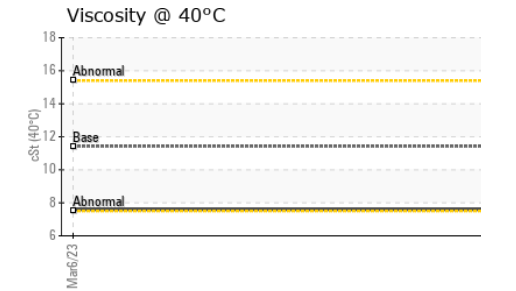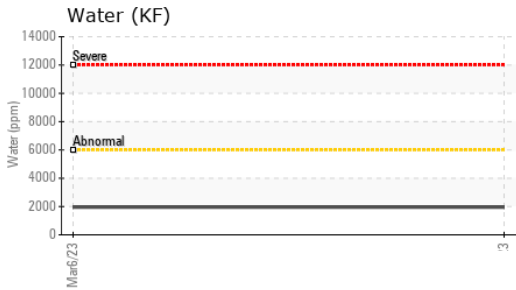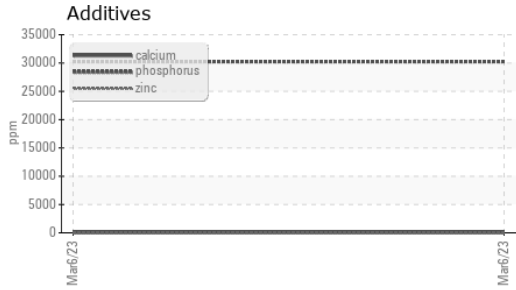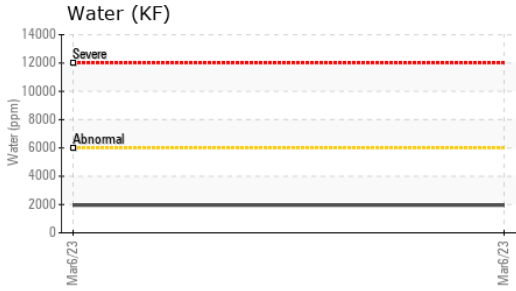

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.10	<b>0.20</b>	---	---






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.6	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	11.42	<b>7.6</b>	---	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color					no image	no image
Bottom					no image	no image

## GRAPHS

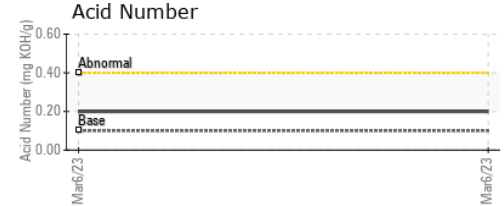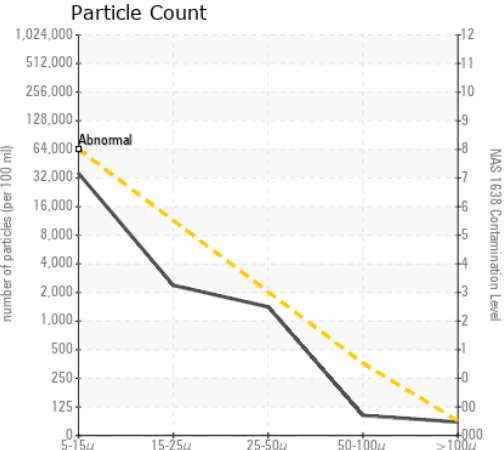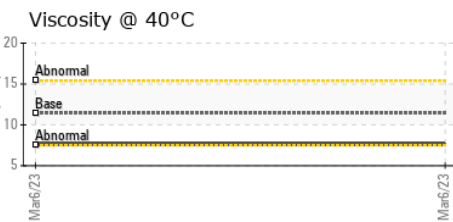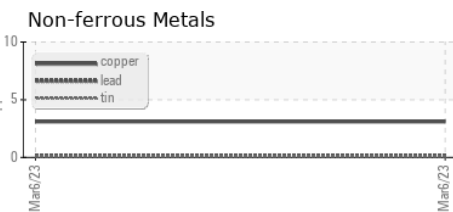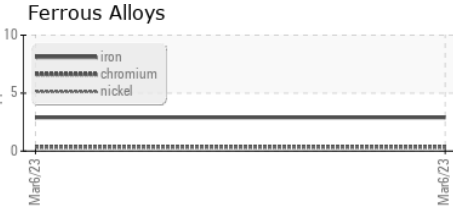

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0763593      **Received** : 08 Mar 2023  
**Lab Number** : 02543966      **Diagnosed** : 10 Mar 2023  
**Unique Number** : 5540971      **Diagnostician** : Kevin Marson  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCountNAS, TAN Man )

**KF Aero**  
 9500 Airport Road  
 Mount Hope, ON  
 CA L0R 1W0  
 Contact: Justin Lewis  
 j.lewis@kfaero.ca  
 T: (905)679-3313  
 F: (905)679-4921

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.