

OIL ANALYSIS REPORT

Sample Rating Trend



AIRBUS N316FA GREEN

Hydraulic System Fluid SKYDROL LD-4 (--- GAL)

DIAGNOSIS

Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

The water content is negligible. There is no indication of any contamination in the oil. The system and fluid cleanliness is acceptable.


Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

IATION	method	limit/base	current	history1	history2
	Client Info		WC0763594		
	Client Info		06 Mar 2023		
hrs	Client Info		0		
hrs	Client Info		0		
	Client Info		N/A		
			NORMAL		
	method	limit/base	current	history1	history2
ppm	ASTM D5185(m)	>20	2		
ppm	ASTM D5185(m)	>10	<1		
	× 7	>10	0		
	. /				
			-		
	. /	>10	-		
	. /				
	()	>10			
			-		
	. ,				
ppm	ASTM D5185(m)		9		
	method	limit/base	current	history1	history2
ppm	ASTM D5185(m)	0			
ppm	ASTM D5185(m)	0	0		
ppm	ASTM D5185(m)	0	0		
ppm	ASTM D5185(m)		0		
ppm	ASTM D5185(m)	0	<1		
ppm	ASTM D5185(m)	0	65		
ppm	ASTM D5185(m)	20000	30380		
ppm	ASTM D5185(m)	0	4		
ppm	ASTM D5185(m)	1900	645		
ppm	ASTM D5185(m)		<1		
	method	limit/base	current	history1	history2
ppm	ASTM D5185(m)	>15	4		
	ASTM D5185(m)		6		
	ASTM D5185(m)	>20	29		
%	. /				
ppm	ASTM D6304*	>6000	2366.9		
ESS	method	limit/base	current	history1	history2
	NAS 1638				
count	NAS 1638	>2025	206		
Journ	1170 1000	2020			
count	NIAS 1600	> 360	15		
count count	NAS 1638 NAS 1638	>360 >64	15 44		
	hrs ppm ppm </td <td>Client InfohrsClient InfohrsClient InfoClient InfoClient InfoClient InfoClient InfoVMethodppmASTM D5185(m)ppmASTM D5185(m</td> <td>Client InfohrsClient InfohrsClient InfoClient InfoClient InfoClient InfoImit/baseppmASTM D5185(m)ppmASTM D5185(m)ppmASTM</td> <td>Client Info06 Mar 2023hrsClient Info0hrsClient Info0Client InfoN/ANCRMALNORMALppmASTM D5185(m)>202ppmASTM D5185(m)>10<1</td> ppmASTM D5185(m)>100ppmASTM D5185(m)>100ppmASTM D5185(m)>10<1	Client InfohrsClient InfohrsClient InfoClient InfoClient InfoClient InfoClient InfoVMethodppmASTM D5185(m)ppmASTM D5185(m	Client InfohrsClient InfohrsClient InfoClient InfoClient InfoClient InfoImit/baseppmASTM D5185(m)ppmASTM	Client Info06 Mar 2023hrsClient Info0hrsClient Info0Client InfoN/ANCRMALNORMALppmASTM D5185(m)>202ppmASTM D5185(m)>10<1	Client Info O6 Mar 2023 hrs Client Info 0 krs Client Info N/A Client Info N/A Client Info N/A Client Info N/A Rethod Imit/base current history1 ppm ASTM D5185(m) >10 <1



OIL ANALYSIS REPORT

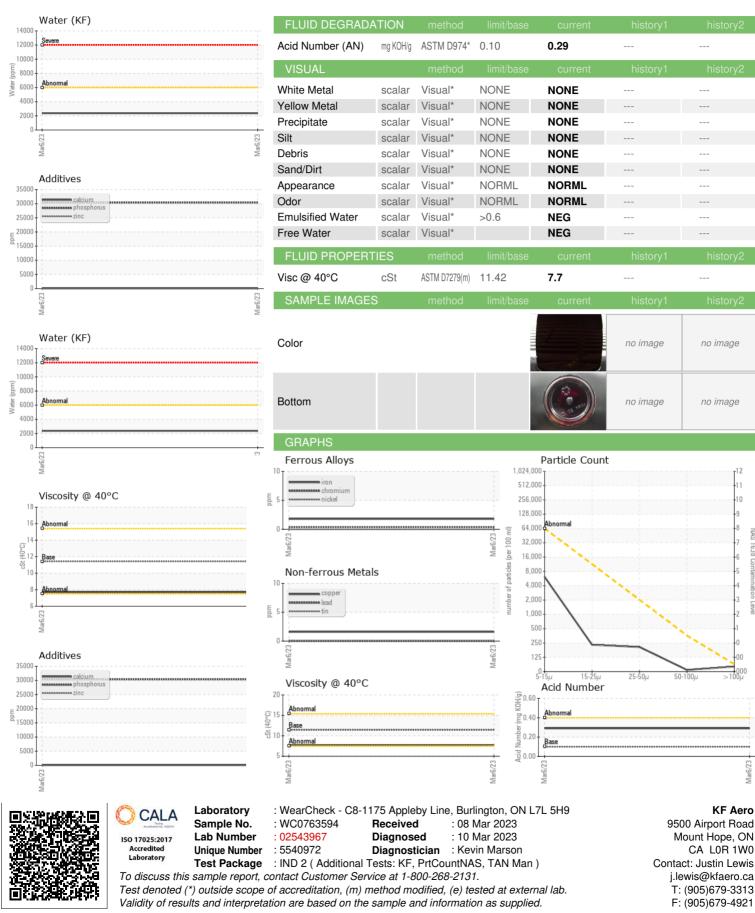

Report Id: KELMOU [WCAMIS] 02543967 (Generated: 10/23/2023 08:59:33) Rev: 1

Contact/Location: Justin Lewis - KELMOU

1638 C