

OIL ANALYSIS REPORT

Sample Rating Trend

ISO



NO UNIT WC0768713

Component **Hydraulic System**

Fluid

NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition

The condition of the oil is acceptable for the time in service.

						\
				Mar2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
	W C I I O I V		IIIIIIIIII			1113101 92
Sample Number		Client Info		WC0768713		
Sample Date	tls -	Client Info		06 Mar 2023		
Machine Age	mths	Client Info		0		
Oil Age	mths	Client Info		0 N/A		
Oil Changed		Client inio		ATTENTION		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	1		
Chromium	ppm	ASTM D5185(m)	>10	0		
Nickel	ppm	ASTM D5185(m)	>10	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>10	<1		
Lead	ppm	ASTM D5185(m)	>10	0		
Copper	ppm	ASTM D5185(m)	>75	0		
Tin	ppm	ASTM D5185(m)	>10	<1		
Antimony	ppm	ASTM D5185(m)		<1		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES						
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	method ASTM D5185(m)	limit/base	current 3	history1	history2
	ppm		limit/base		•	, and the second
Boron Barium		ASTM D5185(m)	limit/base	3		
Boron	ppm	ASTM D5185(m) ASTM D5185(m)	limit/base	3 0		
Boron Barium Molybdenum Manganese	ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	limit/base	3 0 2		
Boron Barium Molybdenum	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	limit/base	3 0 2 <1		
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	limit/base	3 0 2 <1 21		
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	limit/base	3 0 2 <1 21 3054		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	limit/base	3 0 2 <1 21 3054 1234		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	limit/base	3 0 2 <1 21 3054 1234 1199		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)		3 0 2 <1 21 3054 1234 1199 3412 <1		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	limit/base	3 0 2 <1 21 3054 1234 1199 3412 <1		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) method ASTM D5185(m)		3 0 2 <1 21 3054 1234 1199 3412 <1 current		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	limit/base >20	3 0 2 <1 21 3054 1234 1199 3412 <1 current 4		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) method ASTM D5185(m)	limit/base	3 0 2 <1 21 3054 1234 1199 3412 <1 current		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	limit/base >20	3 0 2 <1 21 3054 1234 1199 3412 <1 current 4		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	limit/base >20 >20	3 0 2 <1 21 3054 1234 1199 3412 <1 current 4 0		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) MASTM D5185(m) MASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	limit/base >20 >20 limit/base	3 0 2 <1 21 3054 1234 1199 3412 <1 current 4 0		history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) METHOD ASTM D5185(m)	limit/base >20 >20 limit/base >5000	3 0 2 <1 21 3054 1234 1199 3412 <1 current 4 0 0	history1 history1	history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) method ASTM D5185(m)	limit/base >20 >20 limit/base >5000 >1300	3 0 2 <1 21 3054 1234 1199 3412 <1 current 4 0 0 current ▲ 8687 ▲ 1545		history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >14µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) method ASTM D5185(m) ASTM D7647 ASTM D7647	limit/base >20 >20 limit/base >5000 >1300 >160	3 0 2 <1 21 3054 1234 1199 3412 <1 current 4 0 0 current ▲ 8687 ▲ 1545 91	history1 history1	history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) MASTM D5185(m) MASTM D5185(m) MASTM D5185(m) METHOD ASTM D5185(m) ASTM D7647 ASTM D7647 ASTM D7647	limit/base >20 >20 limit/base >5000 >1300 >160 >40	3 0 2 <1 21 3054 1234 1199 3412 <1 current 4 0 0 current ▲ 8687 ▲ 1545 91 23	history1 history1	history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) method ASTM D5185(m) ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	limit/base >20 >20 limit/base >5000 >1300 >160 >40 >10	3 0 2 <1 21 3054 1234 1199 3412 <1 current 4 0 0 current ▲ 8687 ▲ 1545 91 23 2	history1	history2 history2



OIL ANALYSIS REPORT

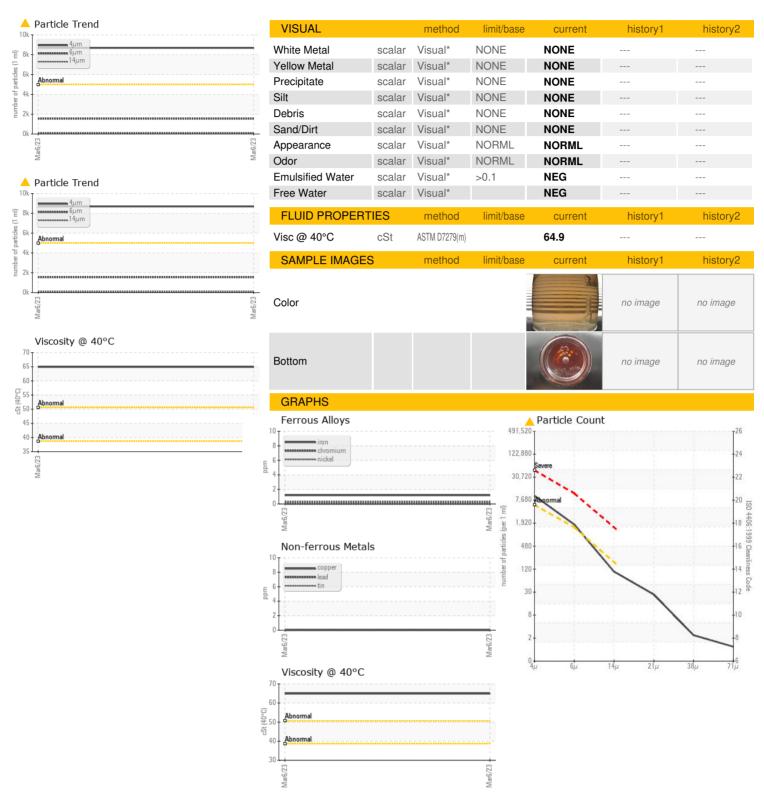



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : WC0768713 . 02544336 : 5541341

Received Diagnosed Test Package : MOB 2

: 13 Mar 2023

: 10 Mar 2023

: Kevin Marson Diagnostician

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Vaderstad Industries

Box 123, 2 miles N on HWY 9 Langbank, SK **CA SOG 2X0**

Contact: Marlon marlon.malolos@vaderstad.com

> T: F: