




# OIL ANALYSIS REPORT

Sample Rating Trend

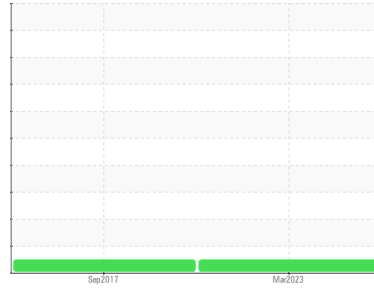

**NORMAL**



Machine Id  
**RECLAIM TANK**

Component  
**Unknown Component**  
Fluid  
**{not provided} (--- GAL)**

## DIAGNOSIS

### Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please provide more complete information on your next sample.

### Wear

Component wear rates appear to be normal (unconfirmed).

### Contamination

There is no indication of any contamination in the component (unconfirmed).

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the sample is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC</b>	WC22120565	---
Sample Date	Client Info			<b>15 Mar 2023</b>	15 Sep 2017	---
Machine Age	days	Client Info		<b>0</b>	0	---
Oil Age	days	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		<b>0</b>	17	---
Iron	ppm	ASTM D5185(m)		<b>39</b>	32	---
Chromium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185(m)		<b>2</b>	1	---
Titanium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---
Aluminum	ppm	ASTM D5185(m)		<b>10</b>	3	---
Lead	ppm	ASTM D5185(m)		<b>19</b>	20	---
Copper	ppm	ASTM D5185(m)		<b>126</b>	103	---
Tin	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---
Antimony	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	2	---
Magnesium	ppm	ASTM D5185(m)		<b>46</b>	8	---
Calcium	ppm	ASTM D5185(m)		<b>85</b>	55	---
Phosphorus	ppm	ASTM D5185(m)		<b>836</b>	865	---
Zinc	ppm	ASTM D5185(m)		<b>662</b>	810	---
Sulfur	ppm	ASTM D5185(m)		<b>2567</b>	3032	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		<b>16</b>	12	---
Sodium	ppm	ASTM D5185(m)		<b>3</b>	4	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		<b>0.94</b>	1.10	---




# OIL ANALYSIS REPORT

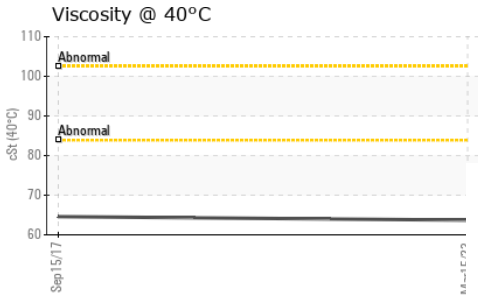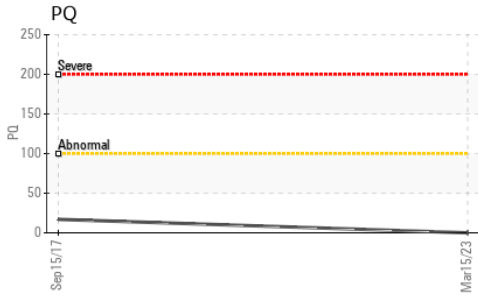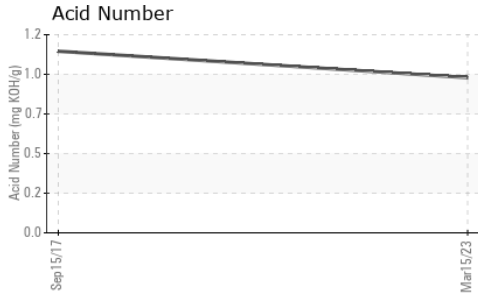






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	NEG	NEG	---
Free Water	scalar	Visual*	NEG	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	63.7	64.6	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

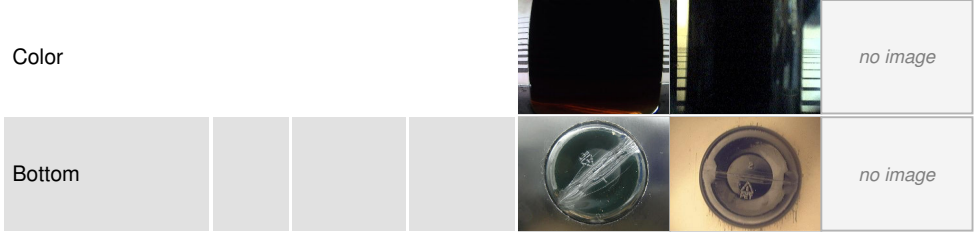

## GRAPHS

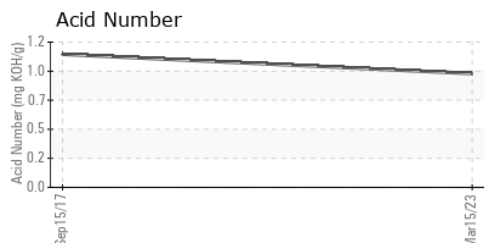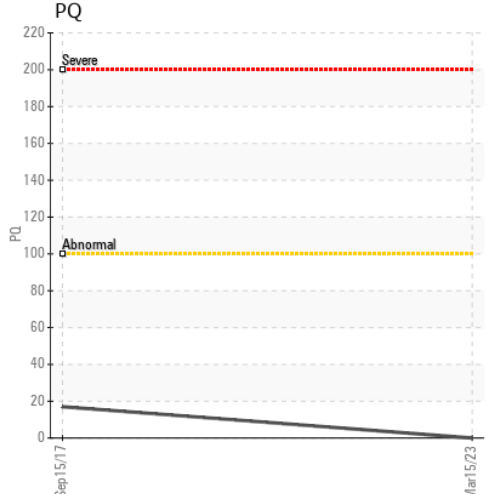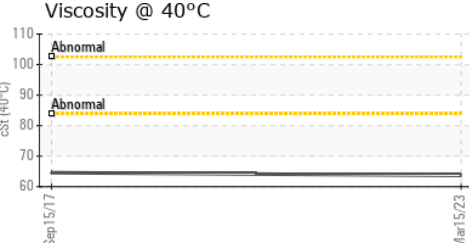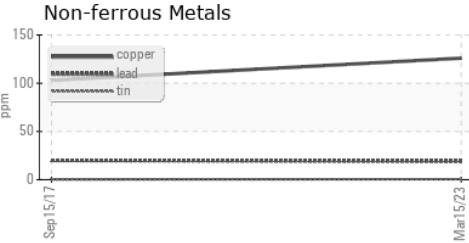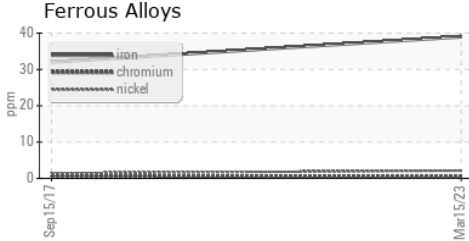

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC  
**Lab Number** : 02545713  
**Unique Number** : 5542718  
**Test Package** : IND 2  
**Received** : 16 Mar 2023  
**Tested** : 17 Mar 2023  
**Diagnosed** : 17 Mar 2023 - Kevin Marson

**Goodyear Napanee**  
 388 Goodyear Road  
 Napanee, ON  
 CA K7R 3L2  
 Contact: Mohammad Waleed  
 Mohammad\_Waleed@goodyear.com  
 T: (613)354-7709  
 F: (613)354-9377

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.