



PROBLEM SUMMARY

Sample Rating Trend

ISO




Area
Shipping
 Machine Id
GAULIN HOMOGENIZER
 Component
New (Unused) Oil
 Fluid
SWEPCO 757 ISO 220 (--- LTR)




COMPONENT CONDITION SUMMARY

Particle Trend

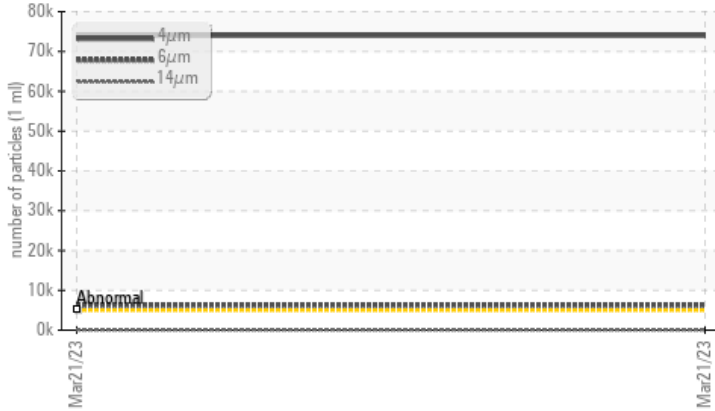

Viscosity @ 40°C

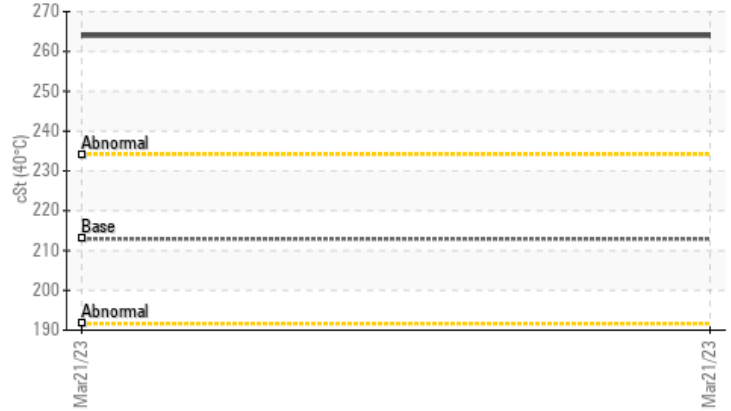

RECOMMENDATION

This is the baseline readout on this new (unused) oil. The fluid is suitable for service. Resample in 30-45 days to monitor this situation. NOTE: New oils are not generally filtered or guaranteed to a certain cleanliness code. We advise that you verify the target cleanliness code for your application and recommend the use of a portable filter cart to fill any system with a target code below the ISO cleanliness code of this product.

PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	---	---
Particles >4µm	ASTM D7647	>5000	73992	---	---
Particles >6µm	ASTM D7647	>1300	6251	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	23/20/13	---	---

Customer Id: HEXEDM
 Sample No.: WC0791206
 Lab Number: 02547807
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	Resample in 30-45 days to monitor this situation.
Alert	---	---	?	NOTE: New oils are not generally filtered or guaranteed to a certain cleanliness code. We advise that you verify the target cleanliness code for your application and recommend the use of a portable filter cart to fill any system with a target code below the ISO cleanliness code of this product.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

ISO



Area
Shipping
 Machine Id
GAULIN HOMOGENIZER
 Component
New (Unused) Oil
 Fluid
SWPECO 757 ISO 220 (--- LTR)



DIAGNOSIS

Recommendation

This is the baseline readout on this new (unused) oil. The fluid is suitable for service. Resample in 30-45 days to monitor this situation. NOTE: New oils are not generally filtered or guaranteed to a certain cleanliness code. We advise that you verify the target cleanliness code for your application and recommend the use of a portable filter cart to fill any system with a target code below the ISO cleanliness code of this product.

Wear

(not applicable)

Contamination

Particles >4µm and oil cleanliness are severely high. Particles >6µm are abnormally high.

Fluid Condition

The viscosity of the oil is higher than normal, possibly indicating the addition of a heavier grade of oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for service. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		WC0791206	---	---
Sample Date	Client Info		21 Mar 2023	---	---
Machine Age	Client Info		0	---	---
Oil Age	Client Info		0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			SEVERE	---	---

WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185(m) >5	<1	---	---
Chromium	ppm	ASTM D5185(m) >5	0	---	---
Nickel	ppm	ASTM D5185(m) >5	0	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m) >5	0	---	---
Aluminum	ppm	ASTM D5185(m) >5	0	---	---
Lead	ppm	ASTM D5185(m) >5	0	---	---
Copper	ppm	ASTM D5185(m) >5	0	---	---
Tin	ppm	ASTM D5185(m) >5	0	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185(m)	<1	---	---
Barium	ppm	ASTM D5185(m)	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	---	---
Manganese	ppm	ASTM D5185(m)	0	---	---
Magnesium	ppm	ASTM D5185(m)	0	---	---
Calcium	ppm	ASTM D5185(m)	1	---	---
Phosphorus	ppm	ASTM D5185(m)	2	---	---
Zinc	ppm	ASTM D5185(m)	1	---	---
Sulfur	ppm	ASTM D5185(m)	2862	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS






	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185(m) >15	1	---	---
Sodium	ppm	ASTM D5185(m)	0	---	---
Potassium	ppm	ASTM D5185(m) >20	<1	---	---

INFRA-RED

	method	limit/base	current	history 1	history 2
Soot %	%	ASTM D7844*	0	---	---
Nitration	Abs/cm	ASTM D7624*	2.6	---	---
Sulfation	Abs/.1mm	ASTM D7415*	15.6	---	---



OIL ANALYSIS REPORT

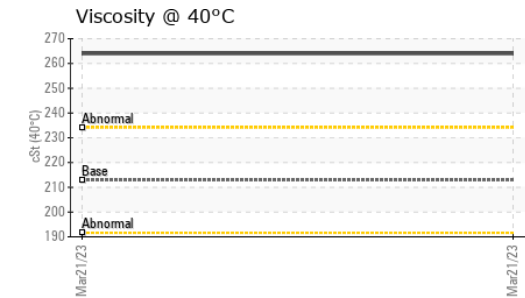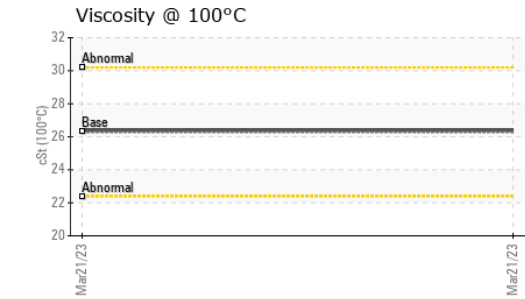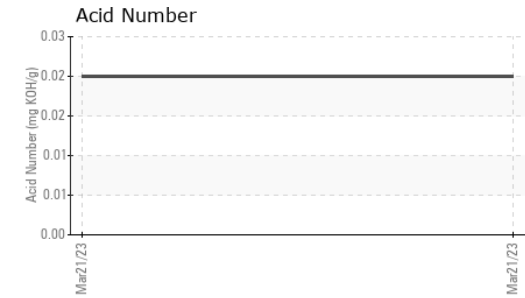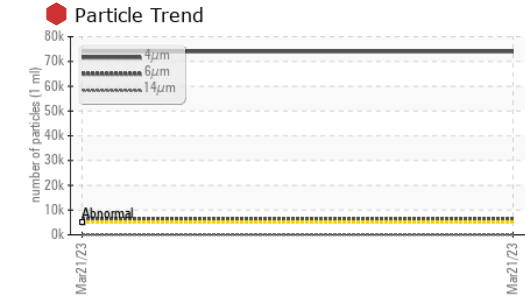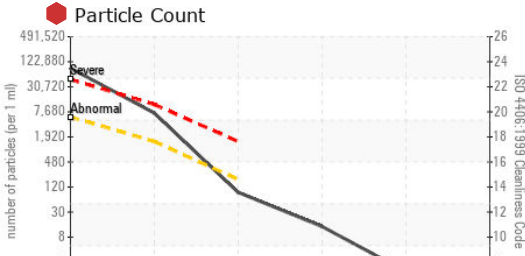

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Hexion Canada Inc. - EDMONTON PLANT
Sample No. : WC0791206 **Received** : 27 Mar 2023 12621 - 156th Street NW
Lab Number : 02547807 **Diagnosed** : 28 Mar 2023 Edmonton, AB
Unique Number : 5552817 **Diagnostician** : Kevin Marson CA T5V 1E1
Test Package : IND 2 (Additional Tests: FT-IR, ICP-NewOil, KV100, PrtCount, TAN Man, VI) Contact: Scott Mckenzie
 scott.mckenzie@henxion.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

T: (780)447-8469
 F: (780)447-7268

FLUID CLEANLINESS	method	limit/base	current	history 1	history 2
Particles >4µm	ASTM D7647	>5000	73992	---	---
Particles >6µm	ASTM D7647	>1300	6251	---	---
Particles >14µm	ASTM D7647	>160	79	---	---
Particles >21µm	ASTM D7647	>40	12	---	---
Particles >38µm	ASTM D7647	>10	1	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	23/20/13	---	---

FLUID DEGRADATION	method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	ASTM D7414*	3.4	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*	0.02	---	---

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	Visual*	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	---	---
Precipitate	scalar	Visual*	NONE	---	---
Silt	scalar	Visual*	NONE	---	---
Debris	scalar	Visual*	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	---	---
Appearance	scalar	Visual*	NORML	---	---
Odor	scalar	Visual*	NORML	---	---
Emulsified Water	scalar	Visual*	NEG	---	---
Free Water	scalar	Visual*	NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 40°C	cSt	ASTM D7279(m)	212.9	264	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	26.3	26.4	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	158	130	---	---

SAMPLE IMAGES	method	limit/base	current	history 1	history 2
Color				no image	no image
Bottom				no image	no image