




# OIL ANALYSIS REPORT

Sample Rating Trend

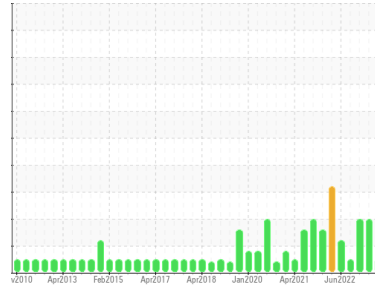

**NORMAL**



Area  
**System 33 - Gas Compression [01954098]**  
 Machine Id  
**Z-3300 1ST STAGE GAS COMPRESSOR LUBE OIL (S/N F-3305)**  
 Component  
**Hydraulic System**  
 Fluid  
**IRVING HYDRAULIC OIL LP 32 (2195 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

### Contaminants

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

### Oil Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PP</b>	PP	PP
Sample Date	Client Info	<b>16 Apr 2023</b>	07 Mar 2023	29 Jan 2023
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	ABNORMAL	ABNORMAL

## WEAR METALS

method	limit/base	current	history1	history2	
PQ	ASTM D8184*	<b>0</b>	0	0	
Iron	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	1	<1
Chromium	ppm	ASTM D5185(m) >10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m) >10	<b>0</b>	0	0
Lead	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185(m) >20	<b>0</b>	<1	<1
Tin	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	0	<1
Antimony	ppm	ASTM D5185(m)	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Barium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	<b>0</b>	<1	<1
Calcium	ppm	ASTM D5185(m)	<b>54</b>	53	53
Phosphorus	ppm	ASTM D5185(m)	<b>365</b>	364	368
Zinc	ppm	ASTM D5185(m) 400	<b>414</b>	415	419
Sulfur	ppm	ASTM D5185(m)	<b>1152</b>	1136	1144
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	<1	<1
Sodium	ppm	ASTM D5185(m)	<b>0</b>	1	1
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	<1	<1
Water	%	ASTM D6304* >0.05	<b>0.002</b>	0.002	0.001
ppm Water	ppm	ASTM D6304* >500	<b>16.7</b>	20.0	9.8


## INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	<b>2.1</b>	2.4	2.3
Sulfation	Abs/.1mm	ASTM D7415*	<b>23.9</b>	25.8	24.8




# OIL ANALYSIS REPORT


### Varnish Potential

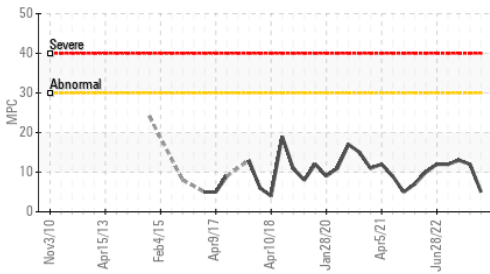


### Remaining Life (RULER)

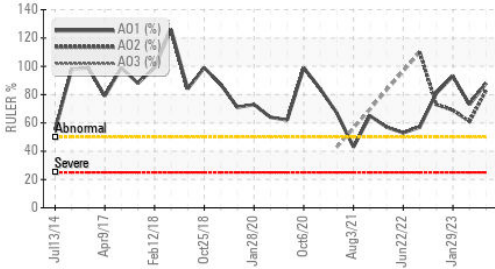


### Particle Count

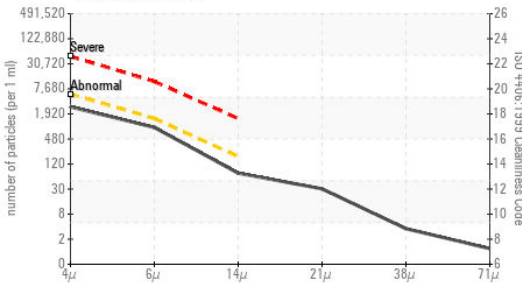

### Water (KF)

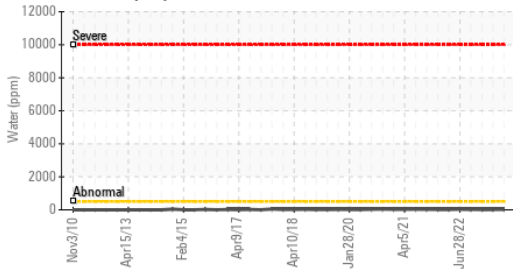

### Acid Number

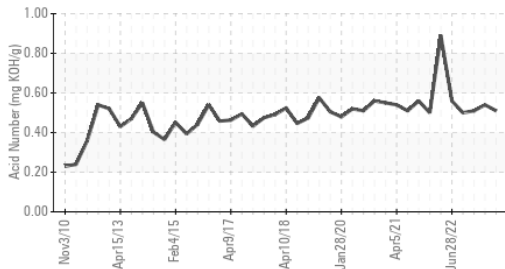

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>2477</b>	▲ 14277	▲ 15310
Particles >6µm	ASTM D7647	>1300	<b>797</b>	▲ 4623	▲ 5771
Particles >14µm	ASTM D7647	>160	<b>64</b>	▲ 436	▲ 809
Particles >21µm	ASTM D7647	>40	<b>27</b>	▲ 121	▲ 267
Particles >38µm	ASTM D7647	>10	<b>3</b>	4	14
Particles >71µm	ASTM D7647	>3	<b>1</b>	1	1
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>18/17/13</b>	▲ 21/19/16	▲ 21/20/17


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	<b>15.1</b>	14.7	15.3
Acid Number (AN)	mg KOH/g	ASTM D974*	<b>0.51</b>	0.54	0.51
Anti-Oxidant 1	%	ASTM D6971*	<b>88</b>	73	93
Anti-Oxidant 2	%	ASTM D6971*	<b>83</b>	61	69
MPC Varnish Potential	Scale	ASTM D7843(m)*	<b>5</b>	12	13

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG
Free Water	scalar	Visual*	NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	31.9	<b>31.5</b>	31.4
Visc @ 100°C	cSt	ASTM D7279(m)	6.4	<b>6.2</b>	6.2
Viscosity Index (VI)	Scale	ASTM D2270*	151	<b>150</b>	150
COC Flash Point	°C	ASTM D92*	194	---	220

SEDIMENT	method	limit/base	current	history1	history2
Pentane Insolubles	%	ASTM D893(m)*	<b>0.035</b>	0.046	0.031

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

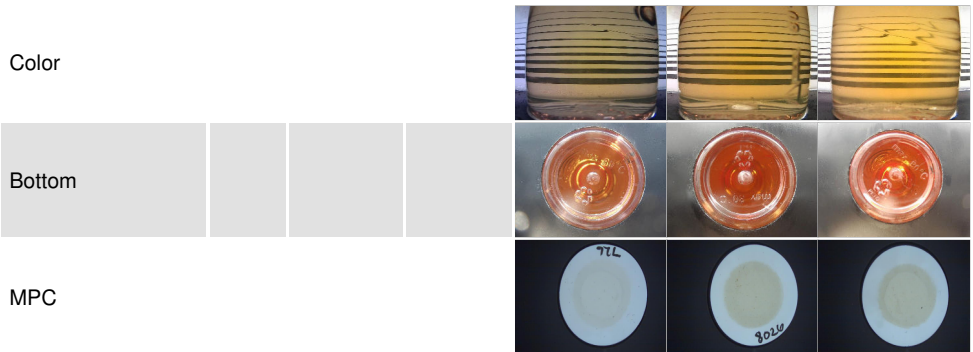

**Laboratory Sample No.**  
**Lab Number**  
**Unique Number**  
**Test Package**

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 HIBERNIA MGMT & DEVELOPMENT CO. LTD  
 : PP **Received** : 17 Apr 2023 SUITE 1000,, 100 NEW GOWER STREET  
 : **02551726** **Diagnosed** : 21 Apr 2023 ST.JOHN'S, NL  
 : 5564741 **Diagnostician** : Bill Quesnel CA A1C 6K3



To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Christopher Michelau  
 christopher.j.michelau@exxonmobil.com  
 T:  
 F: (709)722-3766



# FERROGRAPHY REPORT

Area  
**System 33 - Gas Compression [01954098]**  
 Machine Id  
**Z-3300 1ST STAGE GAS COMPRESSOR LUBE OIL (S/N F-3305)**  
 Component  
**Hydraulic System**  
 Fluid  
**IRVING HYDRAULIC OIL LP 32 (2195 GAL)**

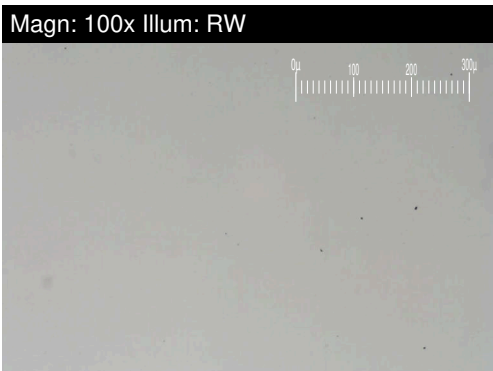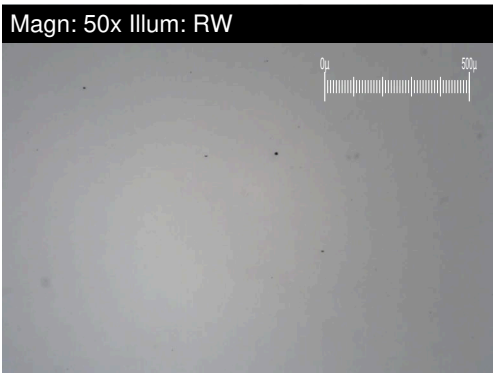



DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		<b>2.8</b>	7.0	0.1
Small Particles		DR-Ferr*		<b>2.8</b>	6.9	0.8
Total Particles		DR-Ferr*	>---	<b>5.6</b>	13.9	0.9
Large Particles Percentage	%	DR-Ferr*		<b>0</b>	0.7	0
Severity Index		DR-Ferr*		<b>0</b>	1	0

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		1	2	1
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*				1
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*			1	1
Ferrous Black Oxides	Scale 0-10	ASTM D7684*			1	
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		1	1	1
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*				

### WEAR

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

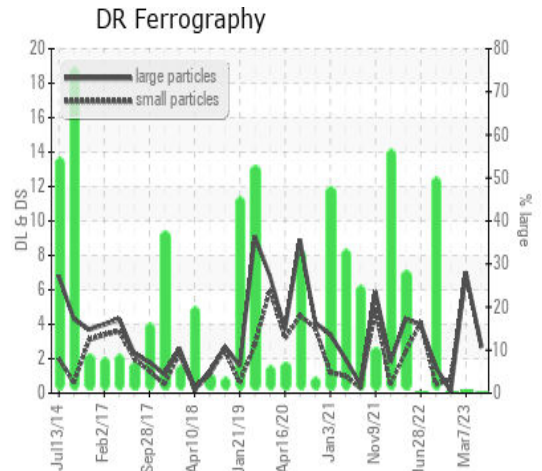

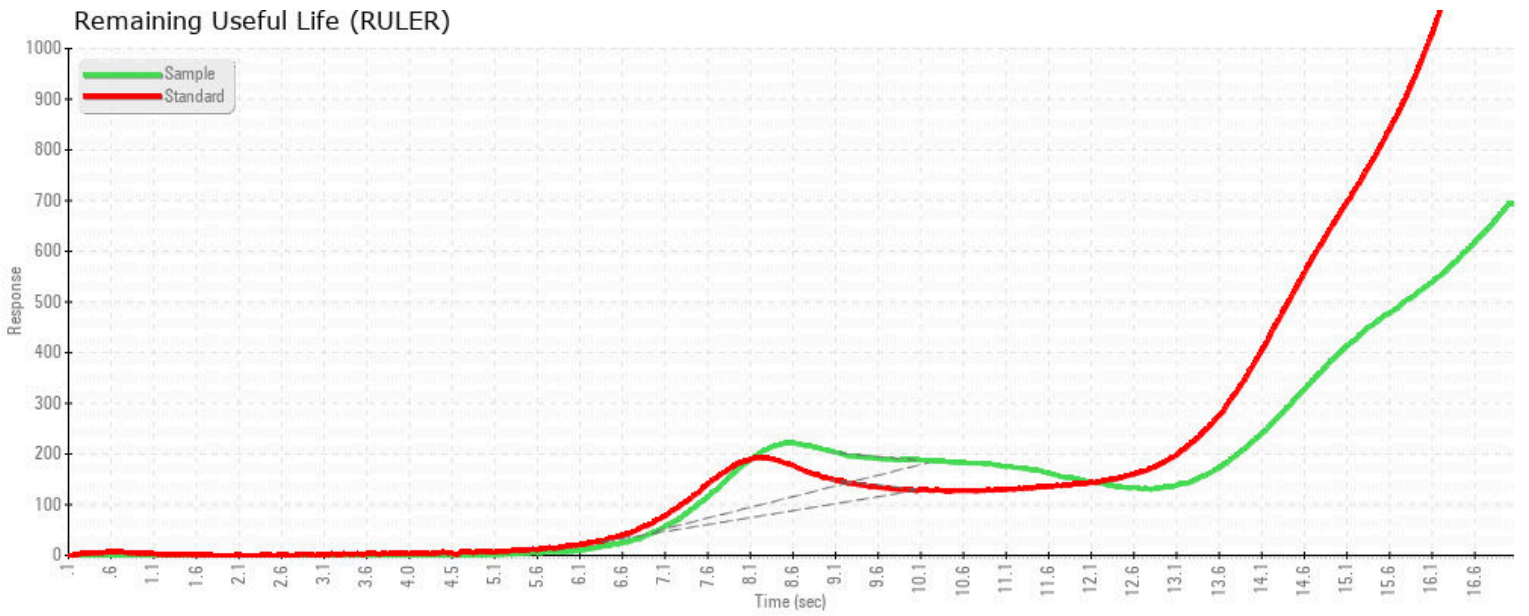

MPC (Varnish Test)



Sample Color & Clarity

