




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**Starting Air Compressors**  
 Machine Id  
**Starting Air Compressor #2**  
 Component  
**Right Air Compressor**  
 Fluid  
**PETRO CANADA FS-600 (--- GAL)**

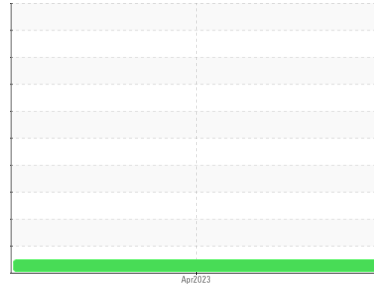

## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is no indication of any contamination in the oil.

**Fluid Condition**  
 The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0763462</b>	---	---
Sample Date	Client Info		<b>09 Apr 2023</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >70	<b>5</b>	---	---
Chromium	ppm	ASTM D5185(m) >15	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m) >6	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m) >10	<b>3</b>	---	---
Lead	ppm	ASTM D5185(m) >20	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m) >80	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Barium	ppm	ASTM D5185(m) 20	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Calcium	ppm	ASTM D5185(m) 20	<b>0</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 320	<b>4</b>	---	---
Zinc	ppm	ASTM D5185(m) 20	<b>2</b>	---	---
Sulfur	ppm	ASTM D5185(m) 3000	<b>2971</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >12	<b>1</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---	---

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	Visual* NONE	<b>VLITE</b>	---	---
Yellow Metal	scalar	Visual* NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual* NONE	<b>NONE</b>	---	---
Silt	scalar	Visual* NONE	<b>VLITE</b>	---	---
Debris	scalar	Visual* NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual* NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual* NORML	<b>NORML</b>	---	---
Odor	scalar	Visual* NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual* >0.1	<b>NEG</b>	---	---
Free Water	scalar	Visual*	<b>NEG</b>	---	---



# OIL ANALYSIS REPORT



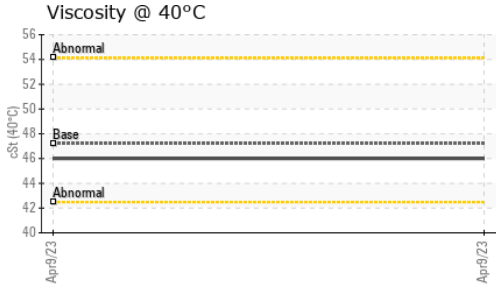


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	47.2	46.0	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

## GRAPHS

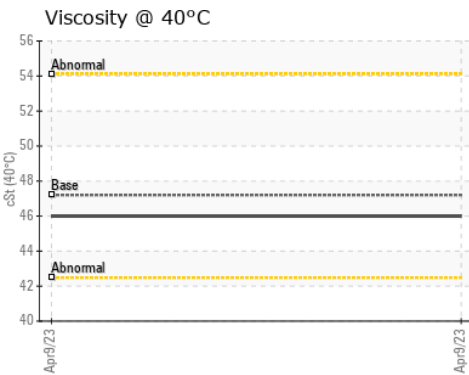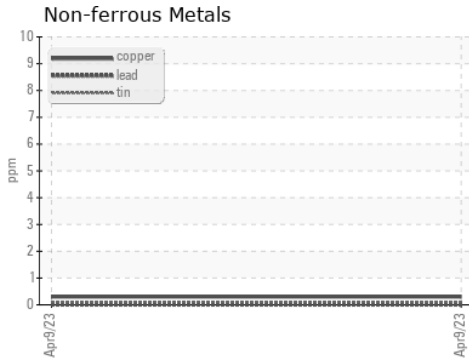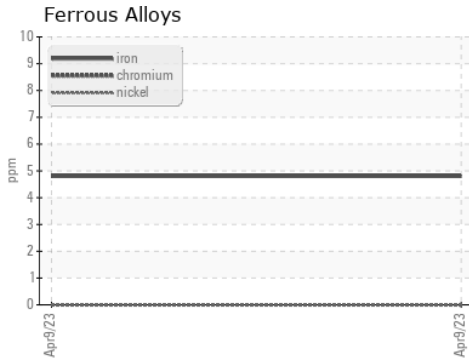

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0763462  
**Lab Number** : 02552871  
**Unique Number** : 5565886  
**Test Package** : MAR 1

**Canadian Coast Guard**  
 CCGS Vincent Massey, 101 Boul. Champlain  
 Quebec, QC  
 CA G1K 7Y7  
 Contact: Vincent Massey  
 vincentmasseyse@ccgs-ngcc.gc.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: