



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area

Shaft Alternators

Machine Id


Shaft Alternator Port

Component

Left Generator Bearing

Fluid

PETRO CANADA HYDREX XV ALL SEASON HYDRAULIC OIL (--- GAL)

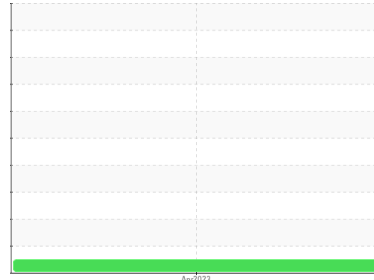

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.
NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0763465	---	---
Sample Date	Client Info		08 Apr 2023	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			NORMAL	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >20	<1	---	---
Chromium	ppm	ASTM D5185(m) >20	0	---	---
Nickel	ppm	ASTM D5185(m) >20	<1	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m)	0	---	---
Aluminum	ppm	ASTM D5185(m) >20	0	---	---
Lead	ppm	ASTM D5185(m) >20	<1	---	---
Copper	ppm	ASTM D5185(m) >20	3	---	---
Tin	ppm	ASTM D5185(m) >20	3	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	<1	---	---
Barium	ppm	ASTM D5185(m) 0	0	---	---
Molybdenum	ppm	ASTM D5185(m) 0	0	---	---
Manganese	ppm	ASTM D5185(m) 1	0	---	---
Magnesium	ppm	ASTM D5185(m) 0	<1	---	---
Calcium	ppm	ASTM D5185(m) 100	110	---	---
Phosphorus	ppm	ASTM D5185(m) 670	722	---	---
Zinc	ppm	ASTM D5185(m) 850	876	---	---
Sulfur	ppm	ASTM D5185(m) 1600	1689	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	<1	---	---
Sodium	ppm	ASTM D5185(m)	<1	---	---
Potassium	ppm	ASTM D5185(m) >20	0	---	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	Visual* NONE	NONE	---	---
Yellow Metal	scalar	Visual* NONE	NONE	---	---
Precipitate	scalar	Visual* NONE	NONE	---	---
Silt	scalar	Visual* NONE	NONE	---	---
Debris	scalar	Visual* NONE	VLITE	---	---
Sand/Dirt	scalar	Visual* NONE	NONE	---	---
Appearance	scalar	Visual* NORML	NORML	---	---
Odor	scalar	Visual* NORML	NORML	---	---
Emulsified Water	scalar	Visual* >2	NEG	---	---
Free Water	scalar	Visual*	NEG	---	---






OIL ANALYSIS REPORT

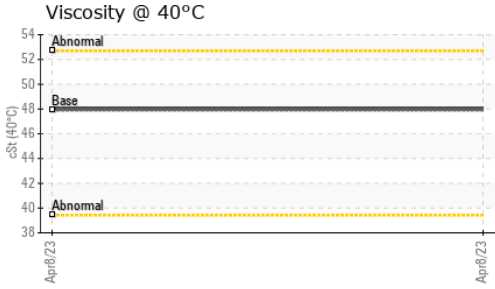

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	47.9	48.0	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

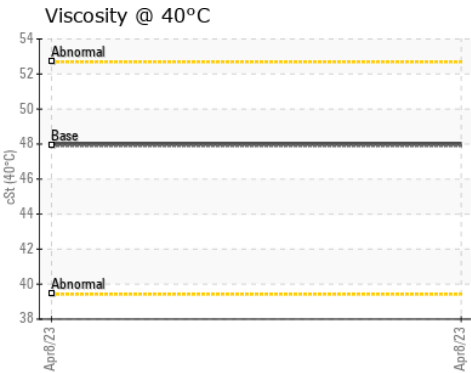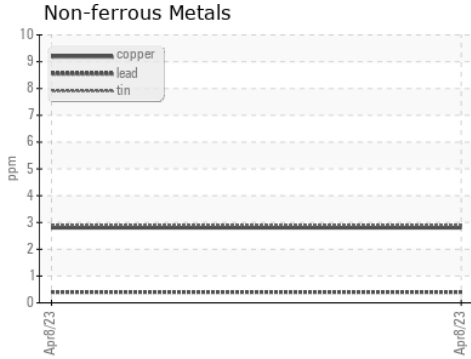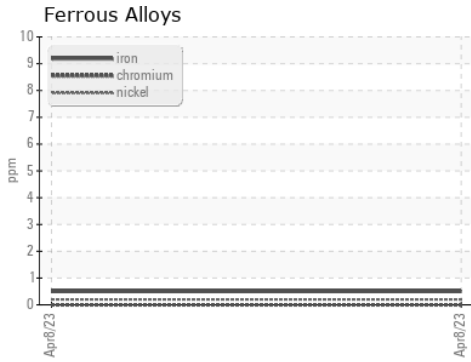

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0763465
Lab Number : 02552878
Unique Number : 5565893
Test Package : MAR 1

Canadian Coast Guard
 CCGS Vincent Massey, 101 Boul. Champlain
 Quebec, QC
 CA G1K 7Y7
 Contact: Vincent Massey
 vincentmasseyse@ccgs-ngcc.gc.ca
 T: (418)573-7423
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.