




# OIL ANALYSIS REPORT

Sample Rating Trend

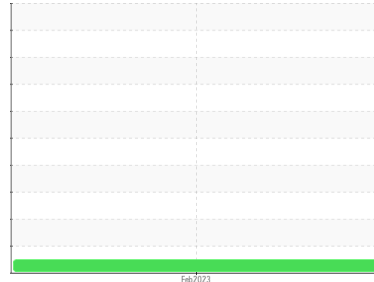

**NORMAL**



Machine Id  
**INTERNATIONAL EAGLE**

Component  
**Diesel Engine**

Fluid  
**NEW HOLLAND AMBRA MASTERGOLD HSP15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history 1	history 2
Sample Number	Client Info			<b>WC0808243</b>	---	---
Sample Date	Client Info			<b>11 Feb 2023</b>	---	---
Machine Age	hrs	Client Info		<b>0</b>	---	---
Oil Age	hrs	Client Info		<b>234</b>	---	---
Oil Changed	Client Info			<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history 1	history 2
Fuel	WC Method	>5		<b>&lt;1.0</b>	---	---
Glycol	WC Method			<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185(m)	>200	<b>4</b>	---	---
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m)	>2	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>30	<b>1</b>	---	---
Lead	ppm	ASTM D5185(m)	>30	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185(m)	>30	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	---	---
Antimony	ppm	ASTM D5185(m)		<b>2</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185(m)		<b>129</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>55</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>384</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>1873</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>1089</b>	---	---
Zinc	ppm	ASTM D5185(m)	1700	<b>1191</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>2895</b>	---	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---


CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185(m)	>30	<b>7</b>	---	---
Sodium	ppm	ASTM D5185(m)		<b>1</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	---	---

INFRA-RED		method	limit/base	current	history 1	history 2
Soot %	%	ASTM D7844*	>3	<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>6.4</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>20.0</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>15.6</b>	---	---











# OIL ANALYSIS REPORT

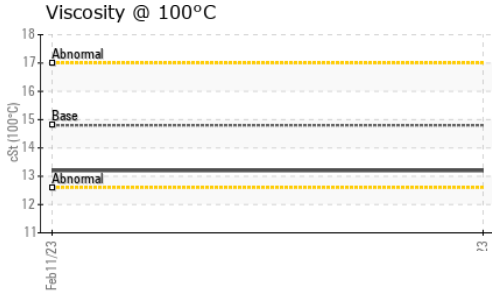

VISUAL	method	limit/base	current	history 1	history 2
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	13.2	---

## GRAPHS

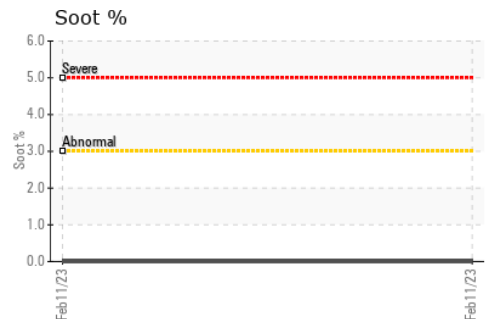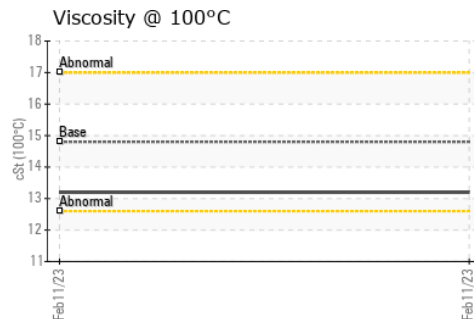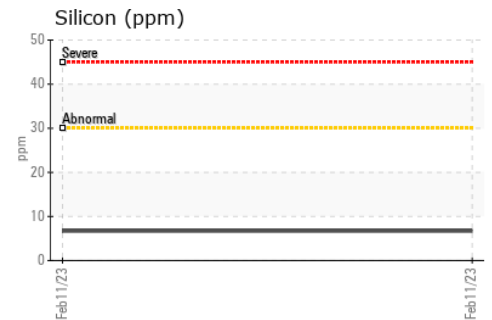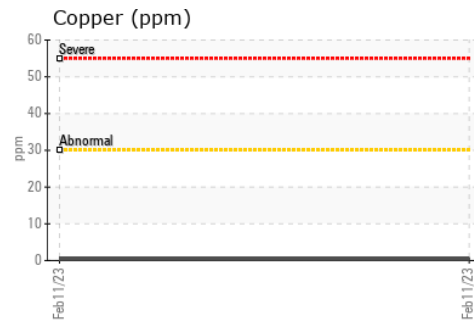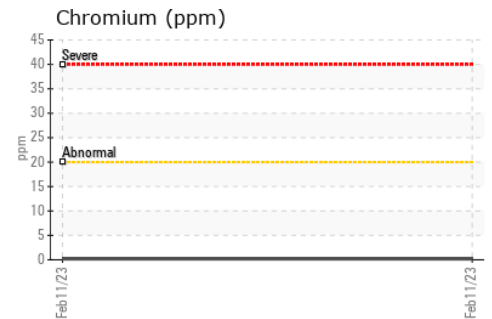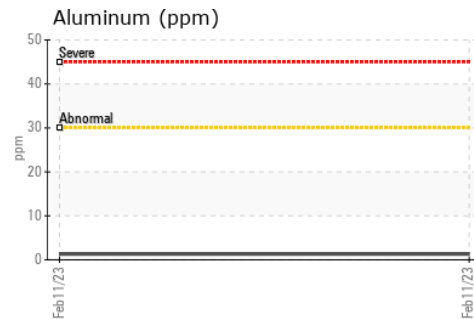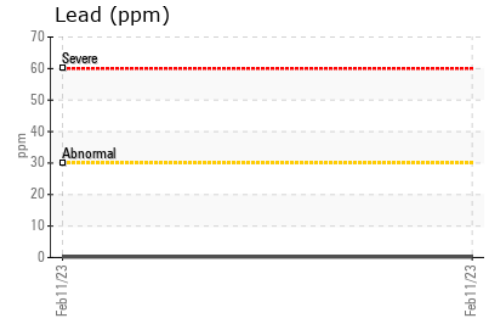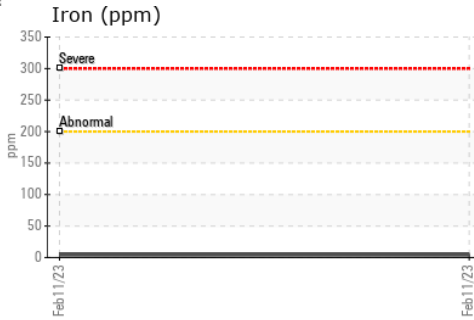

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
 Sample No. : WC0808243  
 Lab Number : 02553849  
 Unique Number : 5566864  
 Test Package : MOB 1

**3RD MERIDIAN FARM**  
 BOX 327  
 ASSINIBOIA, SK  
 CA S0H 0B0  
 Contact: Matthew Heatcoat  
 3rdmeridianfarms@protonmail.com  
 T: (306)640-5209  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.