


## **OIL ANALYSIS REPORT**



**NORMAL** 



# NO UNIT WC0455649

Component

**Unknown Component** 

NOT GIVEN (--- GAL)

<b>-</b> -		$\sim$	40	$\overline{}$	$\sim$ 1	$\overline{}$
וכ	$\alpha$	-	м		SI	•
 -	=\'	-1	B. V		OI	o

#### Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. Diagnostician's Note: Compared this to other samples in your database, and could not find any match for this type of oil. This may be a PAG based compressor oil sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the sample.

#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the sample is suitable for further service.

			,	Apr2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0455649		
Sample Date		Client Info		27 Apr 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0		
Iron	ppm	ASTM D5185(m)		<1		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		<1		
Titanium	ppm	ASTM D5185(m)		<1		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		0		
Lead	ppm	ASTM D5185(m)		18		
Copper	ppm	ASTM D5185(m)		4		
Tin	ppm	ASTM D5185(m)		<1		
Antimony	ppm	ASTM D5185(m)		<1		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		0		
Calcium	ppm	ASTM D5185(m)		0		
Phosphorus	ppm	ASTM D5185(m)		135		
Zinc	ppm	ASTM D5185(m)		57		
Sulfur	ppm	ASTM D5185(m)		499		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		<1		
Sodium	ppm	ASTM D5185(m)		0		
Potassium	ppm	ASTM D5185(m)	>20	0		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
A -! -! Niconala - o (ANI)		4.OTM D07.4*				


0.10

Acid Number (AN)

mg KOH/g ASTM D974\*



### **OIL ANALYSIS REPORT**

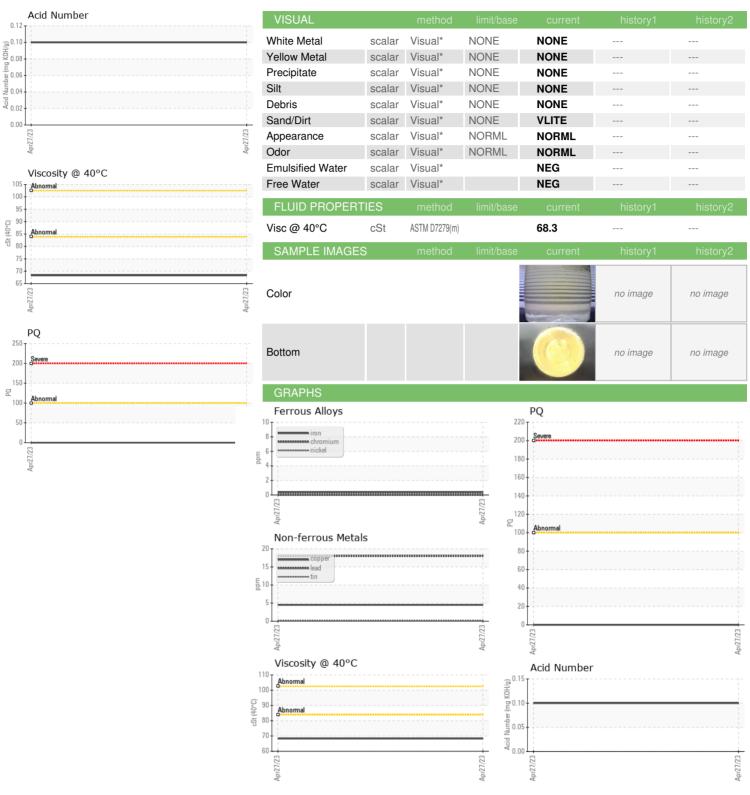



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number** Test Package : IND 2

: WC0455649 : 02554177 : 5567192

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received Diagnosed

: 28 Apr 2023 : 01 May 2023 : Bill Quesnel Diagnostician

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

**NEWFOUNDLAND POWER INC.** 

50 DUFFY PLACE, PO BOX 8910 ST. JOHNS, NL CA A1B 3P6

Contact: Paul Martin

pmartin@newfoundlandpower.com T:

F: (709)737-2926