

OIL ANALYSIS REPORT

LSGS PLANT 2 TAILGATES

Component

Hydraulic System

BIOFLOW AWS 22 (200 LTR)

Sample Rating Trend



D	IΑ	G	N	O	S	IS	

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			ħ	May2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0801014		
Sample Date		Client Info		18 May 2023		
Machine Age	yrs	Client Info		8		
Oil Age	yrs	Client Info		2		
Oil Changed	,	Client Info		Not Changd		
Sample Status				NORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<1		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>20	<1		
Lead	ppm	ASTM D5185(m)	>20	<1		
Copper	ppm	ASTM D5185(m)	>20	0		
Tin	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		0		
Calcium	ppm	ASTM D5185(m)		2		
Phosphorus	ppm	ASTM D5185(m)		255		
Zinc	ppm	ASTM D5185(m)		5		
Sulfur	ppm	ASTM D5185(m)		1053		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	0		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	900		
Particles >6µm		ASTM D7647	>1300	192		
		A OTA 4 D70 47	>160	40		
Particles >14μm		ASTM D7647	>100	18		
Particles >14μm Particles >21μm		ASTM D7647 ASTM D7647		18 6		
•						
Particles >21µm		ASTM D7647	>40 >10	6		
Particles >21µm Particles >38µm		ASTM D7647 ASTM D7647	>40 >10	6 0		



OIL ANALYSIS REPORT

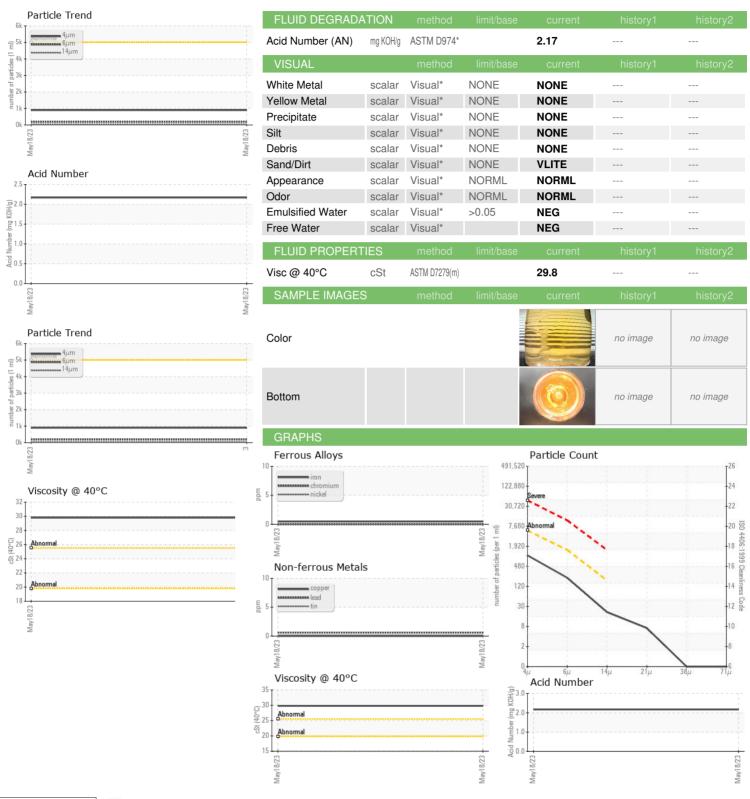



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number** Test Package

. 02560184

: WC0801014 : 5581224 : IND 2

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : 29 May 2023 Recieved Diagnosed : 30 May 2023

: Kevin Marson Diagnostician

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

PETERBOROUGH UTILITIES INC

1867 ASHBURNHAM DRIVE PETERBOROUGH, ON CA K9L 1P8

Contact: Dan Brown dbrown@peterboroughutilities.ca

T: (705)933-6893 F: (705)748-3138