




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

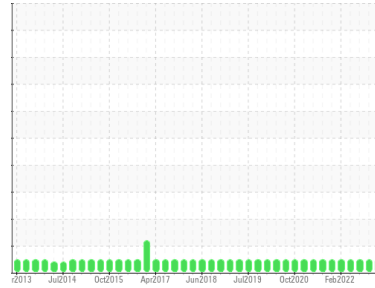

Area

**8**

Machine Id

**8-3-319 FM #3 Fluxo**

Component

**Air Compressor**

Fluid

**GARDNER DENVER AEON 4000 (200 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The water content is negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0818197</b>	WC0751950	WC0714988
Sample Date	Client Info		<b>11 May 2023</b>	26 Oct 2022	26 Jul 2022
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		<b>0</b>	0	0
Iron	ppm	ASTM D5185(m) >50	<b>0</b>	0	0
Chromium	ppm	ASTM D5185(m) >4	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m) >4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	0	0
Lead	ppm	ASTM D5185(m) >20	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185(m) >40	<b>1</b>	5	3
Tin	ppm	ASTM D5185(m) >5	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0.2	<b>0</b>	<1	0
Barium	ppm	ASTM D5185(m) 0.0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 0.0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m) 0.0	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m) 0.0	<b>0</b>	0	0
Calcium	ppm	ASTM D5185(m) 0.0	<b>0</b>	0	<1
Phosphorus	ppm	ASTM D5185(m) 312	<b>0</b>	0	2
Zinc	ppm	ASTM D5185(m) 0.0	<b>&lt;1</b>	<1	1
Sulfur	ppm	ASTM D5185(m) 1629	<b>2290</b>	2547	2375
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	<b>0</b>	0	0
Sodium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	0	<1
Water	%	ASTM D6304* >0.6	<b>0.002</b>	0.003	0.004
ppm Water	ppm	ASTM D6304* >6000	<b>23.3</b>	25.2	45.0
Glycol	%	ASTM D7922*	<b>0.0</b>	0.0	0.0


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 0.03	<b>0.14</b>	0.08	0.15




# OIL ANALYSIS REPORT


## Glycol Contamination

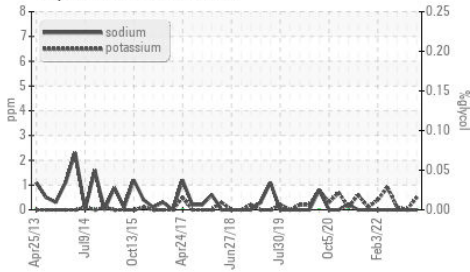


## Water

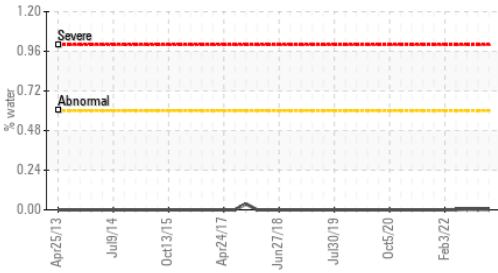


## Acid Number

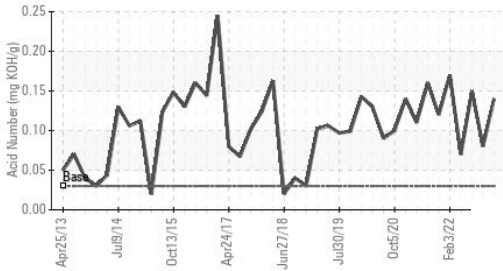

## Viscosity @ 40°C

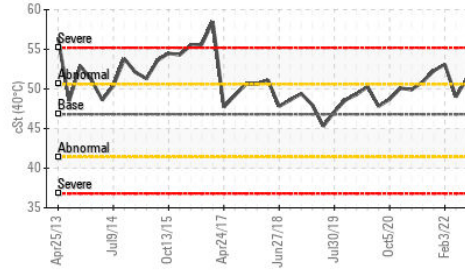

## PQ

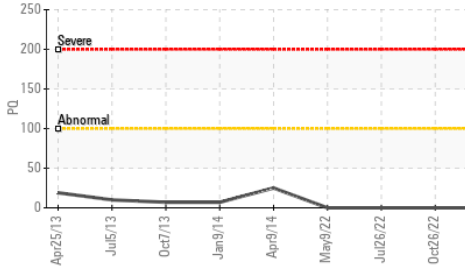


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.6	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46.8	52.8	49.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------


## Color

Bottom

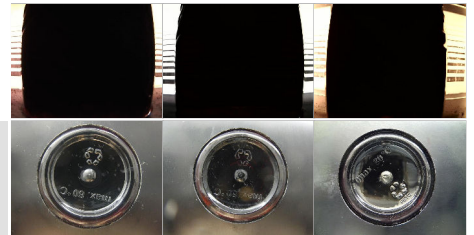


## GRAPHS


### Ferrous Alloys

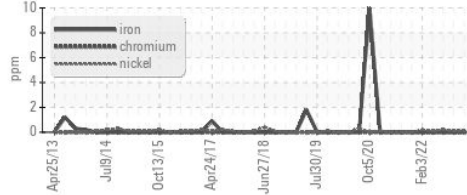


### Non-ferrous Metals

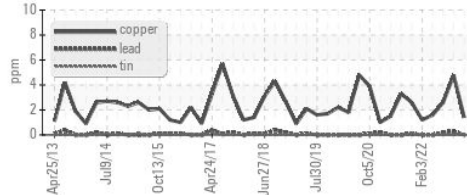


### Viscosity @ 40°C

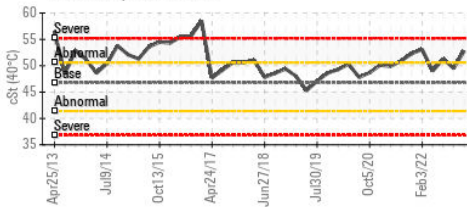

### PQ

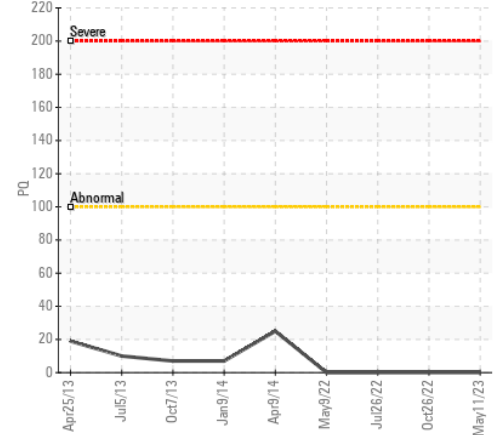

### Acid Number

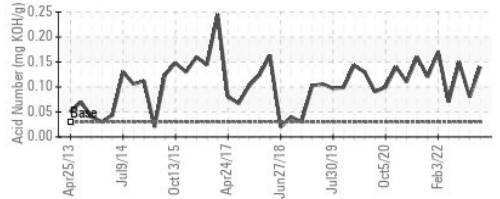

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
 Sample No. : WC0818197  
 Lab Number : 02560209  
 Unique Number : 5581249  
 Test Package : IND 2 ( Additional Tests: Glycol, KF, TAN Man )

Received : 29 May 2023  
 Diagnosed : 30 May 2023  
 Diagnostician : Kevin Marson

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**ST. MARYS CEMENT CO.**  
 400 BOWMANVILLE AVENUE  
 BOWMANVILLE, ON  
 CA L1C 7B5  
 Contact: Aleksandrs Cascins  
 Alex.Cascins@vcimentos.com  
 T: (905)623-3341  
 F: (905)623-4695