


# PROBLEM SUMMARY

Sample Rating Trend






**WEAR**

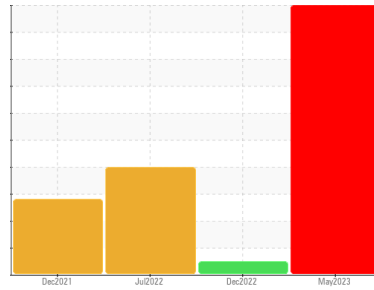

Machine Id  
**TIMM #1 PLUNGER 1**  
Component  
**Gearbox**  
Fluid  
**SHELL OMALA S2 G 68 (--- GAL)**

## COMPONENT CONDITION SUMMARY

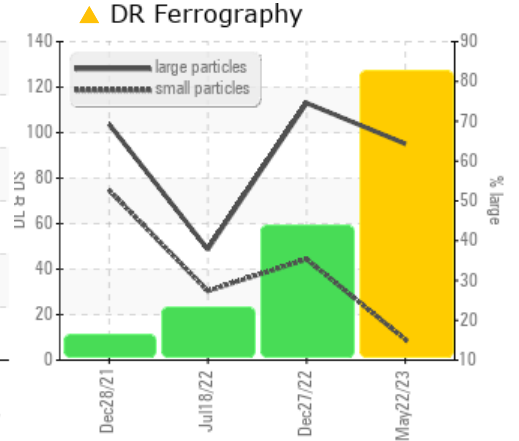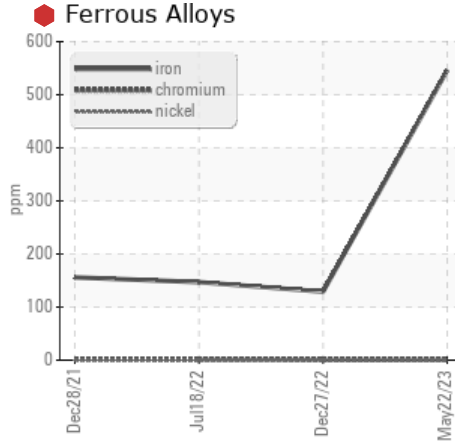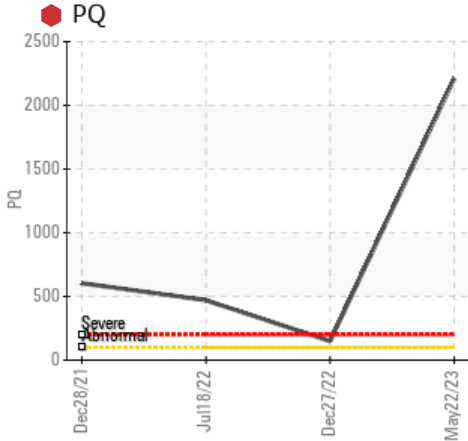

## RECOMMENDATION

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

## PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	NORMAL	ABNORMAL
PQ		ASTM D8184*	2210	149	470
Iron	ppm	ASTM D5185(m) >200	546	129	147
Large Particles		DR-Ferr*	95.1	113.0	48.7
Large Particles Percentage	%	DR-Ferr*	82.5	43.6	23.1
Severity Index		DR-Ferr*	8179	7752	891
Ferrous Rubbing	Scale 0-10	ASTM D7684*	8	7	6

Customer Id: TOYCAM  
Sample No.: CB0031108  
Lab Number: 02562385  
Test Package: IND 3



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Kevin Marson +1 (289)291-4644 x4644  
[Kevin.Marson@wearcheck.com](mailto:Kevin.Marson@wearcheck.com)

To change component or sample information:  
Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Information Required	---	---	?	NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

## HISTORICAL DIAGNOSIS

### 27 Dec 2022 Diag: Kevin Marson

NORMAL



Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 18 Jul 2022 Diag: Kevin Marson

WEAR



We advise that you check for visible metal particles in the oil. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. PQ levels are abnormal. Wear particle analysis indicates that the ferrous rubbing particles are abnormal. Moderate concentration of visible metal present. Gear wear is indicated. The high ferrous density (PQ) index indicates that abnormal wear is occurring. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

view report



### 28 Dec 2021 Diag: Kevin Marson

WEAR




We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. PQ levels are abnormal. Wear particle analysis indicates that the ferrous rubbing particles are abnormal. The high ferrous density (PQ) index indicates that abnormal wear is occurring. There is no indication of any contamination in the oil. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

view report



# OIL ANALYSIS REPORT

Sample Rating Trend

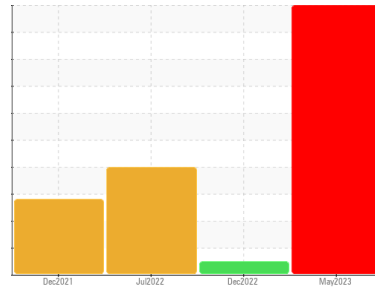

**WEAR**



Machine Id  
**TIMM #1 PLUNGER 1**  
 Component  
**Gearbox**  
 Fluid  
**SHELL OMALA S2 G 68 (--- GAL)**

**DIAGNOSIS**

**Recommendation**

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

**Wear**

Iron ppm levels are severe. PQ levels are severe. Severity Index and large particles and large particles percentage levels are abnormal. Wear particle analysis indicates that the ferrous rubbing particles are abnormal. Gear wear is indicated. The very high ferrous density (PQ) index indicates that severe wear is occurring.

**Contaminants**

There is no indication of any contamination in the oil.

**Oil Condition**

The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>CB0031108</b>	CB0031046	CB0030716
Sample Date	Client Info			<b>22 May 2023</b>	27 Dec 2022	18 Jul 2022
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>SEVERE</b>	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	NEG	NEG






WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		<b>2210</b>	149	470
Iron	ppm	ASTM D5185(m)	>200	<b>546</b>	129	147
Chromium	ppm	ASTM D5185(m)	>15	<b>1</b>	<1	1
Nickel	ppm	ASTM D5185(m)	>15	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>100	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>200	<b>12</b>	12	27
Tin	ppm	ASTM D5185(m)	>25	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	6.2	<b>&lt;1</b>	<1	<1
Barium	ppm	ASTM D5185(m)	0.0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)		<b>3</b>	1	2
Magnesium	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	<1	0
Calcium	ppm	ASTM D5185(m)	0.0	<b>0</b>	0	<1
Phosphorus	ppm	ASTM D5185(m)	290	<b>308</b>	301	257
Zinc	ppm	ASTM D5185(m)	3.8	<b>20</b>	26	45
Sulfur	ppm	ASTM D5185(m)	8167	<b>7869</b>	8027	7751
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	<b>2</b>	1	2
Sodium	ppm	ASTM D5185(m)		<b>1</b>	1	<1
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		<b>0.37</b>	0.28	0.22

# OIL ANALYSIS REPORT

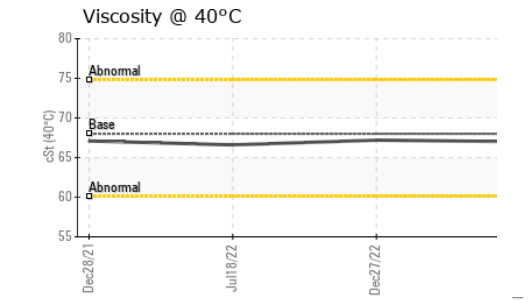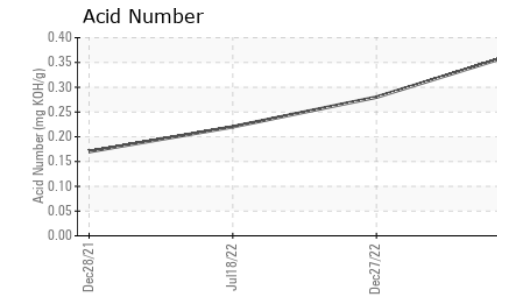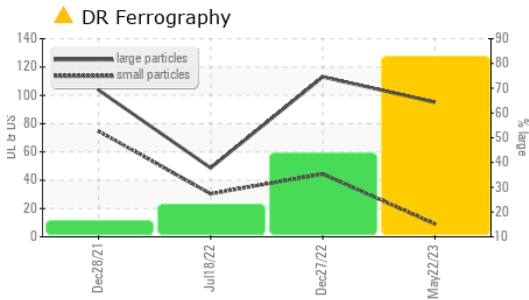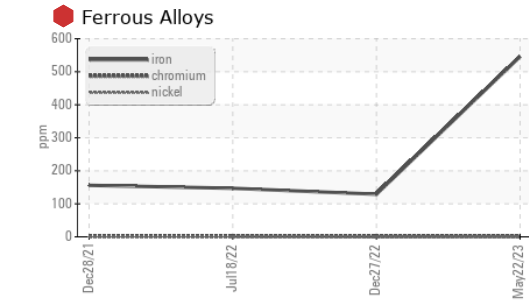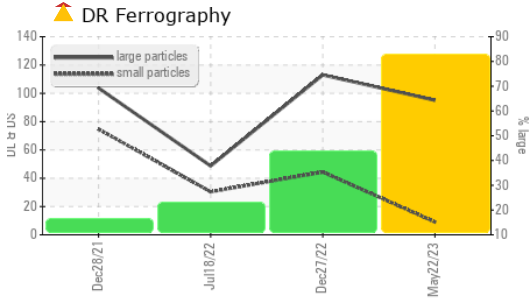

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : CB0031108 **Received** : 06 Jun 2023  
**Lab Number** : 02562385 **Diagnosed** : 08 Jun 2023  
**Unique Number** : 5591426 **Diagnostician** : Kevin Marson  
**Test Package** : IND 3 ( Additional Tests: TAN Man )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.






**TOYOTA MOTOR MANUFACT.**  
 1055 FOUNTAIN STREET N.  
 CAMBRIDGE, ON  
 CA N3H 5K2  
 Contact: mike clappison  
 mike.clappison@toyota.com  
 T: (519)212-5023  
 F: (519)653-9638

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	▲ MODER
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	68.0	67.0	67.2 66.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					
PrtFilter					


## GRAPHS

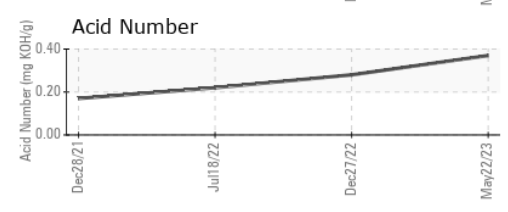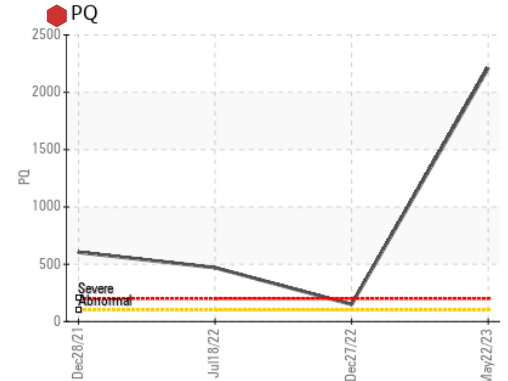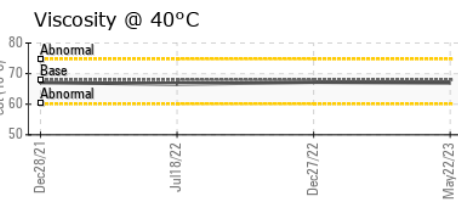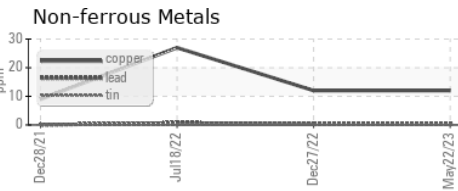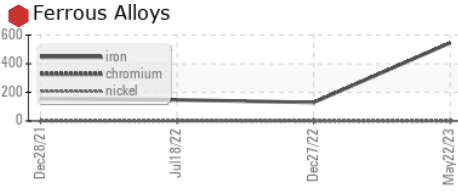


# FERROGRAPHY REPORT

Machine Id  
**TIMM #1 PLUNGER 1**  
Component  
**Gearbox**  
Fluid  
**SHELL OMALA S2 G 68 (--- GAL)**


Magn: 200x Illum: BC

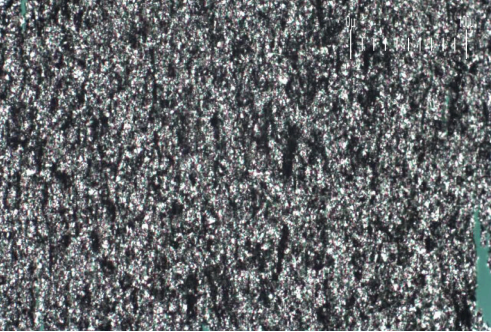

Magn: 50x Illum: RW

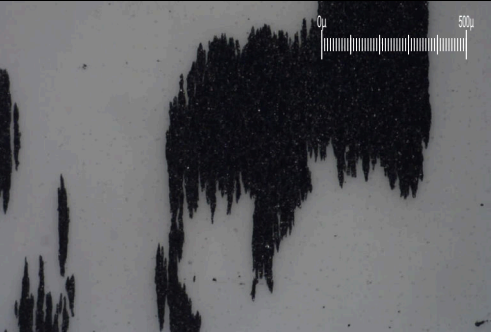

Magn: 100x Illum: RW

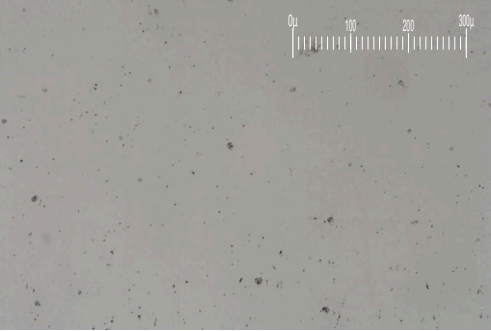


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		▲ <b>95.1</b>	113.0	48.7
Small Particles		DR-Ferr*		<b>9.1</b>	44.4	30.4
Total Particles		DR-Ferr*	>---	<b>104.2</b>	157.4	79.1
Large Particles Percentage	%	DR-Ferr*		▲ <b>82.5</b>	43.6	23.1
Severity Index		DR-Ferr*		▲ <b>8179</b>	7752	891

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		▲ <b>8</b>	7	8
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		4	3	4
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*				
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				1
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*			1	1
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*			1	1
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		1	1	1
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		1	1	2

## WEAR

Iron ppm levels are severe. PQ levels are severe. Severity Index and large particles and large particles percentage levels are abnormal. Wear particle analysis indicates that the ferrous rubbing particles are abnormal. Gear wear is indicated. The very high ferrous density (PQ) index indicates that severe wear is occurring.

## DR Ferrography

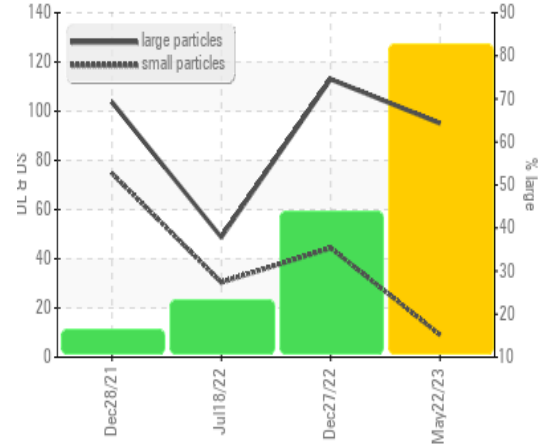

*This page left intentionally blank*