




# OIL ANALYSIS REPORT

Sample Rating Trend

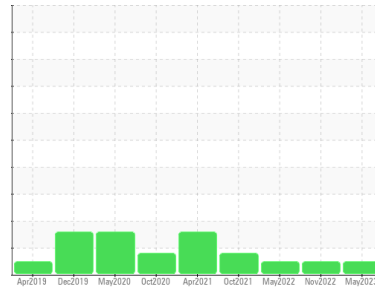

**NORMAL**



Area  
**[199035]**  
 Machine Id  
**HCP G LGBR**  
 Component  
**Bearing**  
 Fluid  
**MOBIL DTE OIL HVY MEDIUM (100 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0455582</b>	WC0455771	WC0445382
Sample Date	Client Info	<b>04 May 2023</b>	30 Nov 2022	27 May 2022
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >2	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184*	<b>0</b>	0	0
Iron	ppm ASTM D5185(m) >63	<b>&lt;1</b>	<1	<1
Chromium	ppm ASTM D5185(m) >20	<b>0</b>	0	0
Nickel	ppm ASTM D5185(m) >20	<b>&lt;1</b>	0	0
Titanium	ppm ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm ASTM D5185(m)	<b>0</b>	0	0
Aluminum	ppm ASTM D5185(m) >2	<b>&lt;1</b>	<1	0
Lead	ppm ASTM D5185(m) >161	<b>17</b>	15	24
Copper	ppm ASTM D5185(m) >13	<b>2</b>	2	2
Tin	ppm ASTM D5185(m) >27	<b>0</b>	0	0
Antimony	ppm ASTM D5185(m)	<b>&lt;1</b>	0	<1
Vanadium	ppm ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES






method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	0
Barium	ppm ASTM D5185(m)	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185(m)	<b>0</b>	0	0
Manganese	ppm ASTM D5185(m)	<b>0</b>	0	0
Magnesium	ppm ASTM D5185(m)	<b>0</b>	0	0
Calcium	ppm ASTM D5185(m)	<b>0</b>	0	0
Phosphorus	ppm ASTM D5185(m)	<b>138</b>	127	131
Zinc	ppm ASTM D5185(m)	<b>64</b>	63	64
Sulfur	ppm ASTM D5185(m)	<b>1937</b>	1834	1900
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >12	<b>2</b>	1	1
Sodium	ppm ASTM D5185(m)	<b>0</b>	<1	<1
Potassium	ppm ASTM D5185(m) >20	<b>&lt;1</b>	<1	<1



# OIL ANALYSIS REPORT

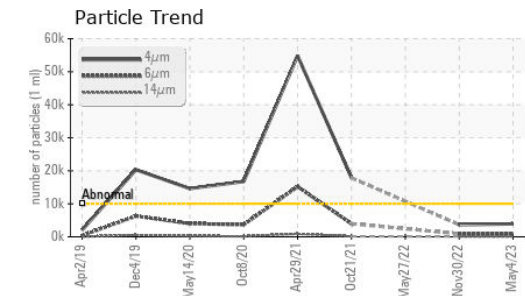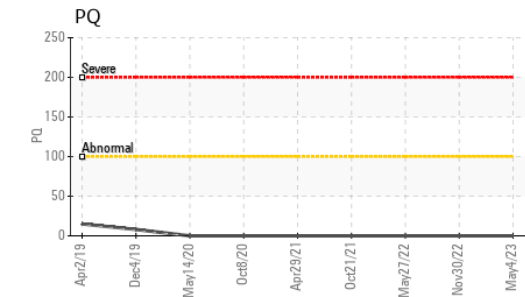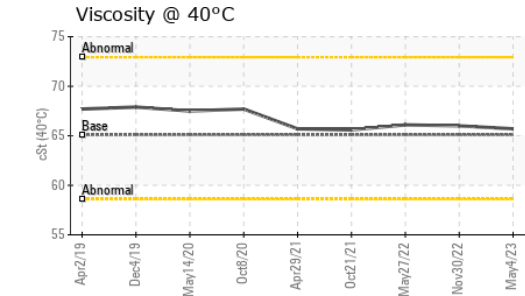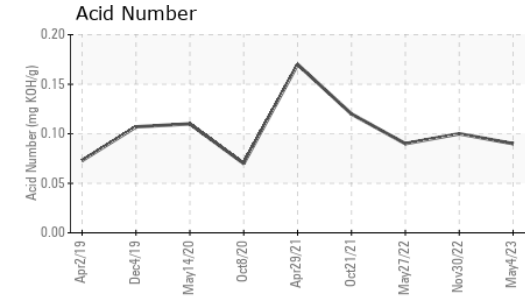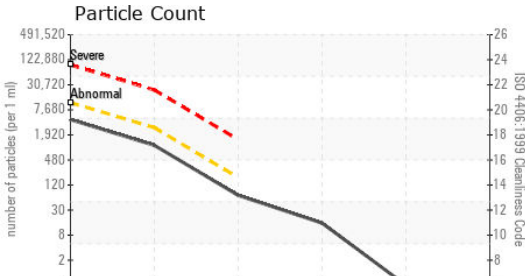

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0455582 **Received** : 09 Jun 2023  
**Lab Number** : **02563194** **Diagnosed** : 14 Jun 2023  
**Unique Number** : 5592235 **Diagnostician** : Kevin Marson  
**Test Package** : IND 2 ( Additional Tests: PRTCOUNT, TAN Man )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.


FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	<b>3917</b>	3646	---
Particles >6µm	ASTM D7647	>2500	<b>948</b>	904	---
Particles >14µm	ASTM D7647	>160	<b>60</b>	58	---
Particles >21µm	ASTM D7647	>40	<b>13</b>	14	---
Particles >38µm	ASTM D7647	>10	<b>0</b>	1	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>20/18/14	<b>19/17/13</b>	19/17/13	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D974*		<b>0.09</b>	0.10	0.09

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar Visual*	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar Visual*	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar Visual*	NONE	<b>NONE</b>	NONE	VLITE
Appearance	scalar Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar Visual*	>2	<b>NEG</b>	NEG	NEG
Free Water	scalar Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D7279(m)	65.1	<b>65.7</b>	66.0	66.1

## SAMPLE IMAGES

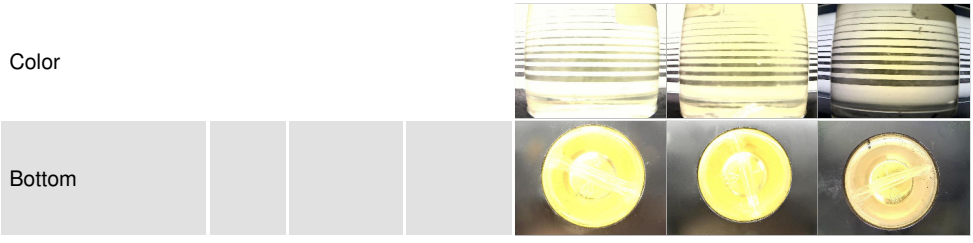

**NEWFOUNDLAND POWER INC.**  
 50 DUFFY PLACE, PO BOX 8910  
 ST. JOHNS, NL  
 CA A1B 3P6  
 Contact: Paul Martin  
 pmartin@newfoundlandpower.com  
 T: (709)737-2926