




PROBLEM SUMMARY


Area
ENGINE ROOM 3RD DECK
 Machine Id
27-K-6410B MAIN AIR COMPRESSOR B (S/N Maint Plan 22465)
 Component
2 Air Compressor
 Fluid
MOBIL RARUS 826 (4 LTR)

Sample Rating Trend

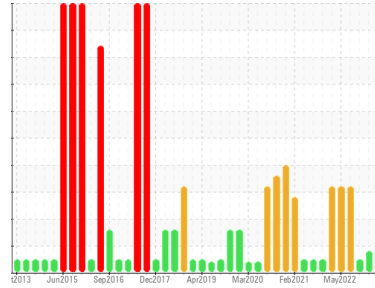

COMPONENT CONDITION SUMMARY

▲ Aluminum (ppm)

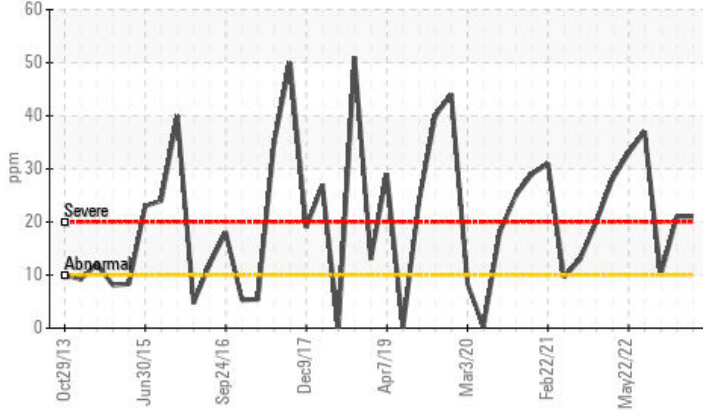

RECOMMENDATION

No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	ATTENTION	NORMAL
Aluminum	ppm	ASTM D5185(m)	>10	▲ 21	▲ 21	10

Customer Id: SPESTJ
 Sample No.: PP
 Lab Number: 02564368
 Test Package: IND 1



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.

HISTORICAL DIAGNOSIS

24 Apr 2023 Diag: Kevin Marson

WEAR



No corrective action is recommended at this time. We recommend an early resample to monitor this condition. Aluminum ppm levels are noted. All other component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service.

view report



15 Nov 2022 Diag: Kevin Marson

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service.

view report



29 Aug 2022 Diag: Kevin Marson

WEAR



We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. Aluminum, copper, iron and tin ppm levels are abnormal. Oil cooler core leaching or motor piston wear is indicated. Bearing wear is indicated. Piston wear is indicated. The low ferrous density (PQ) index indicates the wear metal levels are due to corrosion. There is no indication of any contamination in the oil. The oil is no longer serviceable as a result of the abnormal and/or severe wear.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

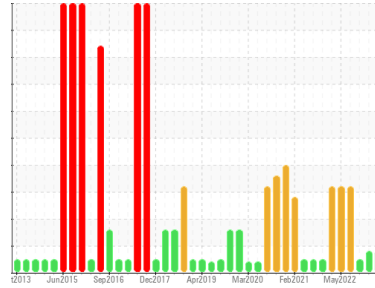

WEAR



Area
ENGINE ROOM 3RD DECK
 Machine Id
27-K-6410B MAIN AIR COMPRESSOR B (S/N Maint Plan 22465)
 Component
2 Air Compressor
 Fluid
MOBIL RARUS 826 (4 LTR)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

Wear

Aluminum ppm levels are noted. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PP	PP	PP
Sample Date	Client Info	22 May 2023	24 Apr 2023	15 Nov 2022
Machine Age	days	0	0	0
Oil Age	days	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ATTENTION	ATTENTION	NORMAL

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m) >50	36	39	28
Chromium	ppm	ASTM D5185(m) >4	0	0	0
Nickel	ppm	ASTM D5185(m) >4	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	0	0	0
Silver	ppm	ASTM D5185(m)	0	0	0
Aluminum	ppm	ASTM D5185(m) >10	▲ 21	▲ 21	10
Lead	ppm	ASTM D5185(m) >20	<1	<1	<1
Copper	ppm	ASTM D5185(m) >40	35	35	20
Tin	ppm	ASTM D5185(m) >5	4	4	3
Antimony	ppm	ASTM D5185(m)	<1	0	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	2	3	4
Barium	ppm	ASTM D5185(m)	0	1	0
Molybdenum	ppm	ASTM D5185(m)	5	5	3
Manganese	ppm	ASTM D5185(m)	<1	<1	<1
Magnesium	ppm	ASTM D5185(m)	<1	<1	0
Calcium	ppm	ASTM D5185(m)	2	<1	1
Phosphorus	ppm	ASTM D5185(m)	122	123	121
Zinc	ppm	ASTM D5185(m)	20	20	18
Sulfur	ppm	ASTM D5185(m)	114	108	156
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >25	5	5	3
Sodium	ppm	ASTM D5185(m)	<1	<1	<1
Potassium	ppm	ASTM D5185(m) >20	0	<1	<1


VISUAL

method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.6	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG




OIL ANALYSIS REPORT

▲ Aluminum (ppm)

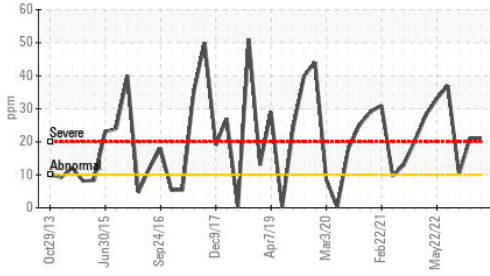

Viscosity @ 40°C

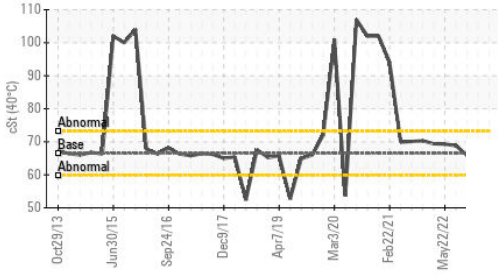

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	66.5	66.0	66.4	65.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color




Bottom




GRAPHS


Ferrous Alloys

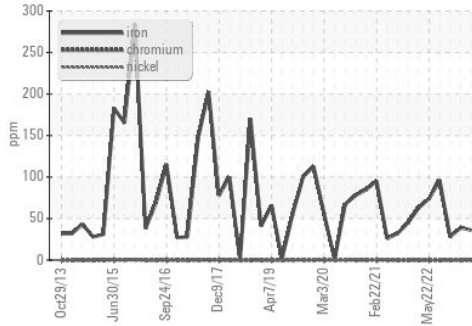

Non-ferrous Metals

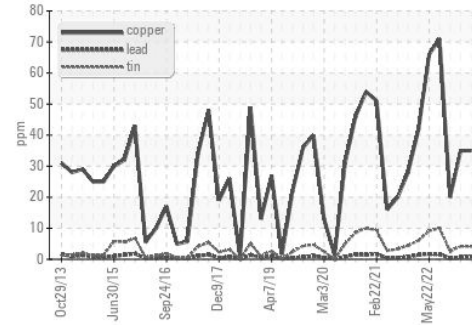

Viscosity @ 40°C

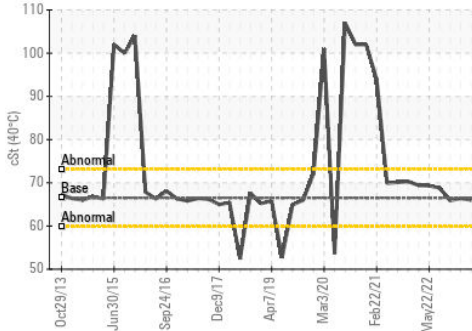

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 HUSKY SEA ROSE /AKER SOLUTIONS	Received : 15 Jun 2023	PO BOX 20
Sample No. : PP	Diagnosed : 15 Jun 2023	ST. JOHN'S, NL
Lab Number : 02564368	Diagnostician : Kevin Marson	CA A1C 6C9
Unique Number : 5593409		Contact: Maintenance Supervisor
Test Package : IND 1		maintsuper.searose@huskyenergy.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: x:
F: x: