




# OIL ANALYSIS REPORT

Sample Rating Trend

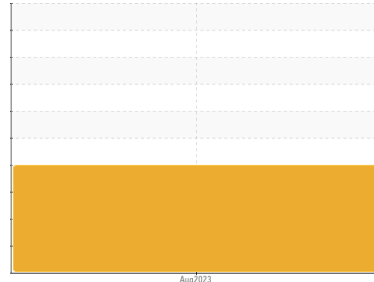

Area  
**G04000 - Goodyear**  
 Machine Id  
**Production A2308025**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 68 (--- GAL)**

## DIAGNOSIS

- ▲ **Recommendation**  
This is a baseline read-out on the submitted sample.
- ▲ **Wear**  
Aluminum, copper and iron ppm levels are noted.
- ▲ **Contamination**  
Silicon ppm levels are notably high.
- Fluid Condition**  
{not applicable}

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>E30000038</b>	---	---
Sample Date	Client Info		<b>04 Aug 2023</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>ATTENTION</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		<b>16</b>	---	---
Iron	ppm	ASTM D5185(m) >20	▲ <b>55</b>	---	---
Chromium	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m) >10	<b>2</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185(m) >10	▲ <b>8</b>	---	---
Lead	ppm	ASTM D5185(m) >20	<b>19</b>	---	---
Copper	ppm	ASTM D5185(m) >20	▲ <b>133</b>	---	---
Tin	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 5	<b>2</b>	---	---
Barium	ppm	ASTM D5185(m) 5	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m) 5	<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m) 25	<b>6</b>	---	---
Calcium	ppm	ASTM D5185(m) 200	<b>51</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 300	<b>740</b>	---	---
Zinc	ppm	ASTM D5185(m) 370	<b>532</b>	---	---
Sulfur	ppm	ASTM D5185(m) 2500	<b>2262</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	▲ <b>16</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>2</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>1</b>	---	---


## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---
Debris	scalar	Visual*	NONE	<b>VLITE</b>	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---
Appearance	scalar	Visual*	NORML	<b>WGOIL</b>	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---







# OIL ANALYSIS REPORT

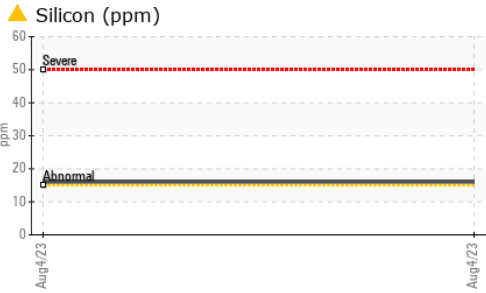

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

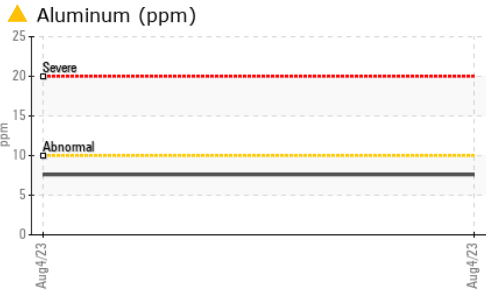

## GRAPHS

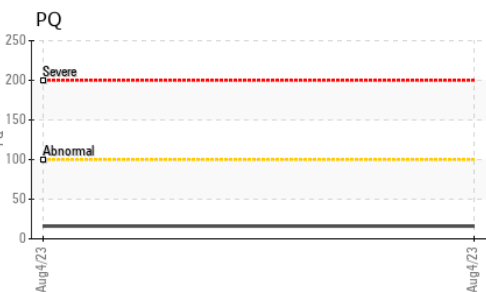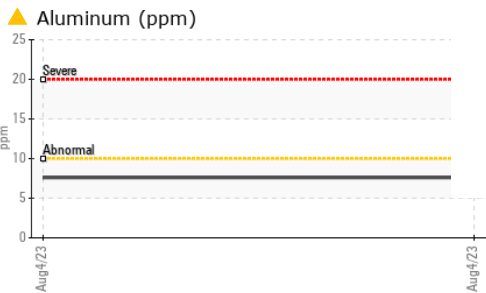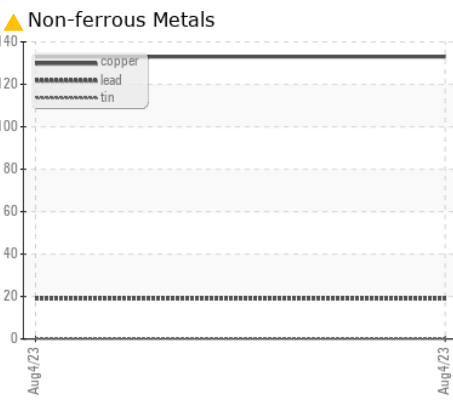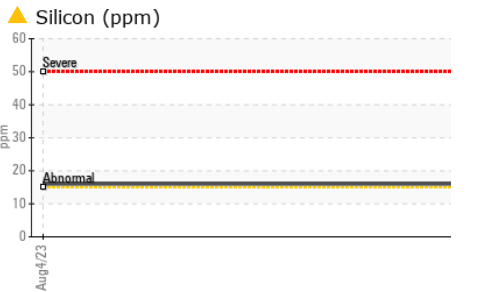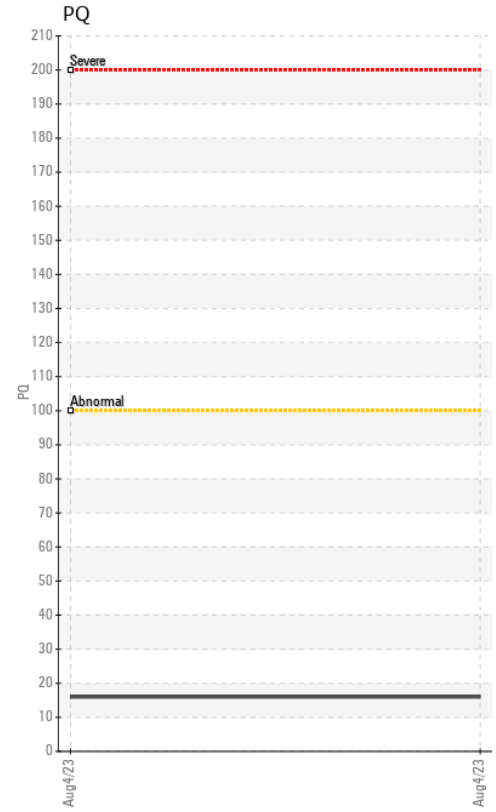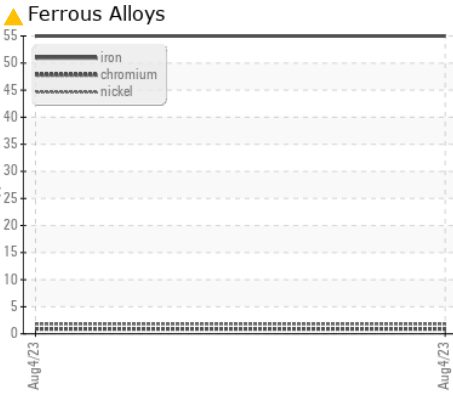

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : E30000038 **Received** : 09 Aug 2023  
**Lab Number** : **02575005** **Diagnosed** : 16 Aug 2023  
**Unique Number** : 5620056 **Diagnostician** : Tatiana Sorkina  
**Test Package** : TEST ( Additional Tests: ICP, PQ )

**Environmental 360 Solutions Ltd.**  
 640 Victoria Street  
 Cobourg, ON  
 CA K9A 5H5  
 Contact: Tatiana Sorkina  
 tsorkina@e360s.ca  
 T: (800)263-3939  
 F: (905)373-4950

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.