

Area
MONT ORIGINAL
 Machine Id
POMPE #1
 Component
1 Pump
 Fluid
MOBIL ACF 36 (--- GAL)

DIAGNOSIS

Recommendation
 Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Wear
 Les taux d'usure de tous les composants sont normaux.

Contamination
 Il n'y a aucun indice de contamination dans l'huile.

Fluid Condition
 L'état de l'huile est acceptable pour la durée de service.

SAMPLE INFORMATION method limit/base current history1 history2

Sample Number	Client Info		ASF0000236	---	---
Sample Date	Client Info		17 Jul 2023	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed		Client Info	N/A	---	---
Sample Status			NORMAL	---	---

CONTAMINATION method limit/base current history1 history2

Water	WC Method		NEG	---	---
-------	-----------	--	------------	-----	-----

WEAR METALS method limit/base current history1 history2

Iron	ppm	ASTM D5185(m)	>90	2	---	---
Chromium	ppm	ASTM D5185(m)	>5	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	0	---	---
Titanium	ppm	ASTM D5185(m)	>3	0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>7	<1	---	---
Lead	ppm	ASTM D5185(m)	>12	0	---	---
Copper	ppm	ASTM D5185(m)	>30	<1	---	---
Tin	ppm	ASTM D5185(m)	>9	0	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---


ADDITIVES method limit/base current history1 history2

Boron	ppm	ASTM D5185(m)		<1	---	---
Barium	ppm	ASTM D5185(m)		1	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		<1	---	---
Calcium	ppm	ASTM D5185(m)		6	---	---
Phosphorus	ppm	ASTM D5185(m)		441	---	---
Zinc	ppm	ASTM D5185(m)		337	---	---
Sulfur	ppm	ASTM D5185(m)		914	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS method limit/base current history1 history2

Silicon	ppm	ASTM D5185(m)	>60	5	---	---
Sodium	ppm	ASTM D5185(m)		1	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---

OIL ANALYSIS REPORT

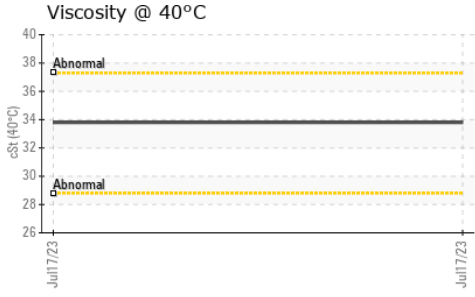









VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	VLITE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	NEG	---	---	
Free Water	scalar	Visual*	NEG	---	---	

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	33.8	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

GRAPHS

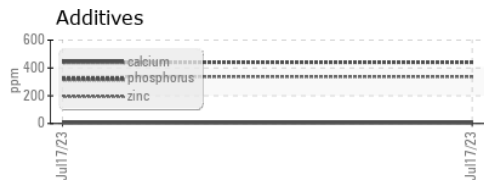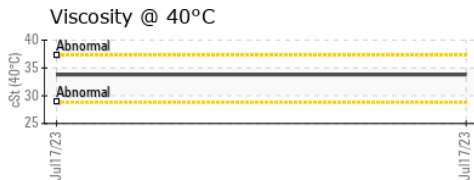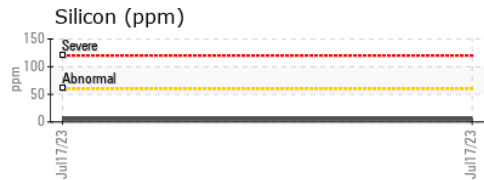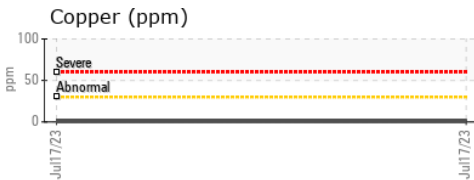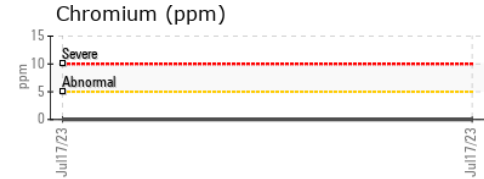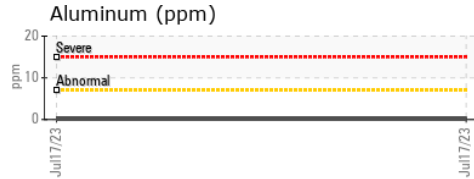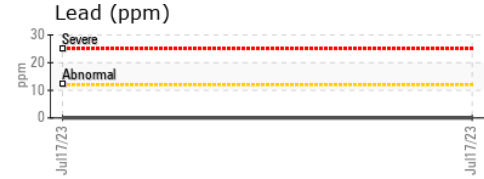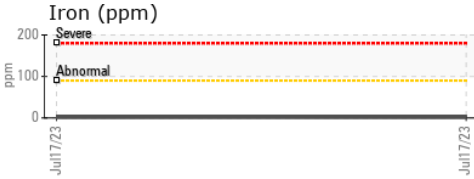

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : ASF0000236 **Received** : 10 Aug 2023
Lab Number : 02575189 **Tested** : 10 Aug 2023
Unique Number : 5620240 **Diagnosed** : 10 Aug 2023 - Wes Davis
Test Package : MOB 1

April Super Flo
 9 rue Beland
 L'Isle-Verte, QC
 CA G0L 1K0
 Contact: Nathaly April
 NAPRIL@APRILSUPERFLO.COM
 T: (418)898-5151
 F: (418)898-2192

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.