


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



VOLKSWAGEN NO UNIT WC0848008

Component

Gasoline Engine

LTR) MOBIL 1 5W30 (-

Fluid			
MORII	1	5W30	1

DIAGNOSIS Recommendation

Resample at the next service interval to monitor. Please submit a sample of the new (unused) oil to establish a baseline. Please note that this is a corrected copy for data entry updates.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Infra-red analysis indicates the sample is not synthetic. The condition of the oil is suitable for further service.

SAMPLE INFORMATION method limit/base current history1 history2							
Sample Number Client Info WC0848008					Aug 2023		
Sample Date Client Info 10 Aug 2023 Machine Age hrs Client Info 0	SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Date Client Info 10 Aug 2023 Machine Age hrs Client Info 0 0	Sample Number		Client Info		WC0848008		
Machine Age hrs Client Info 0 Oil Age hrs Client Info 0 Oil Changed Client Info N/A Sample Status Image: Control of More and the status NORMAL CONTAMINATION method Image: Control of More and the status method Image: Control of More and the status Fuel WC Method A4.0 <1.0			Client Info		10 Aug 2023		
Oil Age hrs Client Info N/A	•	hrs	Client Info		_		
Coli Changed Client Info N/A NORMAL	•	hrs	Client Info				
CONTAMINATION			Client Info				
CONTAMINATION	-				NORMAL		
Fuel		V	method	limit/base	current	history1	historv2
WEAR METALS							
WEAR METALS				74.0			
	•			11 1.0			
Chromium	WEAR METALS			limit/base		history1	history2
Nickel			. ,				
Titanium		ppm					
Silver			. ,	>5			
Aluminum		ppm	()				
Lead		ppm					
Copper	Aluminum	ppm	ASTM D5185(m)				
Trin		ppm	. ,		-		
Antimony	Copper	ppm	ASTM D5185(m)				
Vanadium ppm ASTM D5185(m) <1 Beryllium ppm ASTM D5185(m) 0 Cadmium ppm ASTM D5185(m) 0 ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185(m) 0.0 0 Barium ppm ASTM D5185(m) 0.0 60 Molybdenum ppm ASTM D5185(m) 0.0 60 Manganese ppm ASTM D5185(m) 0.0 60 Magnesium ppm ASTM D5185(m) 1388 539 Calcium ppm ASTM D5185(m) 820 1355 Phosphorus ppm ASTM D5185(m) 720 689 Sulfur ppm ASTM D5185(m) 780 749		ppm	. ,	>10			
Description	•	ppm			-		
Cadmium ppm ASTM D5185(m) 0 ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185(m) 94 72 Barium ppm ASTM D5185(m) 0.0 0 Molybdenum ppm ASTM D5185(m) 0.0 60 Manganese ppm ASTM D5185(m) 0.0 60 Magnesium ppm ASTM D5185(m) 1388 539 Calcium ppm ASTM D5185(m) 820 1355 Phosphorus ppm ASTM D5185(m) 720 689 Zinc ppm ASTM D5185(m) 780 749 Sulfur ppm ASTM D5185(m) 2240 1520 Lithium ppm ASTM D5185(m)		ppm	. ,				
ADDITIVES	Beryllium	ppm	, ,		-		
Boron	Cadmium	ppm	ASTM D5185(m)		0		
Barium	ADDITIVES		method	limit/base	current	history1	history2
Molybdenum ppm ASTM D5185(m) 0.0 60 Manganese ppm ASTM D5185(m) 1388 539 Magnesium ppm ASTM D5185(m) 1388 539 Calcium ppm ASTM D5185(m) 820 1355 Phosphorus ppm ASTM D5185(m) 720 689 Zinc ppm ASTM D5185(m) 780 749 Sulfur ppm ASTM D5185(m) 2240 1520 Lithium ppm ASTM D5185(m) 2240 1520 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) >30 6 Sodium ppm ASTM D5185(m) >20 0 INFRA-RED method	Boron	ppm	ASTM D5185(m)	94	72		
Manganese ppm ASTM D5185(m) <1 Magnesium ppm ASTM D5185(m) 1388 539 Calcium ppm ASTM D5185(m) 820 13555 Phosphorus ppm ASTM D5185(m) 720 689 Zinc ppm ASTM D5185(m) 780 749 Sulfur ppm ASTM D5185(m) 2240 1520 Lithium ppm ASTM D5185(m) 2240 1520 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) >30 6 Sodium ppm ASTM D5185(m) >400 <1	Barium	ppm	ASTM D5185(m)	0.0	0		
Magnesium ppm ASTM D5185(m) 1388 539 Calcium ppm ASTM D5185(m) 820 1355 Phosphorus ppm ASTM D5185(m) 720 689 Zinc ppm ASTM D5185(m) 780 749 Sulfur ppm ASTM D5185(m) 2240 1520 Lithium ppm ASTM D5185(m) 2240 1520 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) >30 6 Sodium ppm ASTM D5185(m) >400 <1	Molybdenum	ppm	ASTM D5185(m)	0.0	60		
Calcium ppm ASTM D5185(m) 820 1355 Phosphorus ppm ASTM D5185(m) 720 689 Zinc ppm ASTM D5185(m) 780 749 Sulfur ppm ASTM D5185(m) 2240 1520 Lithium ppm ASTM D5185(m) <1	Manganese	ppm	ASTM D5185(m)		<1		
Phosphorus ppm ASTM D5185(m) 720 689 Zinc ppm ASTM D5185(m) 780 749 Sulfur ppm ASTM D5185(m) 2240 1520 Lithium ppm ASTM D5185(m) <1 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) >30 6 Sodium ppm ASTM D5185(m) >400 <1 Potassium ppm ASTM D5185(m) >20 0 INFRA-RED method limit/base current history1 history2 Soot % % ASTM D7844* 0 Nitration Abs/cm ASTM D7624* >20 10.2	Magnesium	ppm	ASTM D5185(m)	1388	539		
Zinc ppm ASTM D5185(m) 780 749 Sulfur ppm ASTM D5185(m) 2240 1520	Calcium	ppm	ASTM D5185(m)	820	1355		
Sulfur ppm ASTM D5185(m) 2240 1520	Phosphorus	ppm	ASTM D5185(m)	720	689		
Lithium ppm ASTM D5185(m) <1 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) >30 6 Sodium ppm ASTM D5185(m) >400 <1	Zinc	ppm	ASTM D5185(m)	780	749		
CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) >30 6 Sodium ppm ASTM D5185(m) >400 <1	Sulfur	ppm	ASTM D5185(m)	2240	1520		
Silicon ppm ASTM D5185(m) >30 6 Sodium ppm ASTM D5185(m) >400 <1 Potassium ppm ASTM D5185(m) >20 0 INFRA-RED method limit/base current history1 history2 Soot % % ASTM D7844* 0 Nitration Abs/cm ASTM D7624* >20 10.2	Lithium	ppm	ASTM D5185(m)		<1		
Sodium ppm ASTM D5185(m) >400 <1	CONTAMINANTS	;	method	limit/base	current	history1	history2
Potassium ppm ASTM D5185(m) >20 0 INFRA-RED method limit/base current history1 history2 Soot % % ASTM D7844* 0 Nitration Abs/cm ASTM D7624* >20 10.2	Silicon	ppm	ASTM D5185(m)	>30	6		
INFRA-RED	Sodium	ppm	ASTM D5185(m)	>400	<1		
Soot % % ASTM D7844* 0 Nitration Abs/cm ASTM D7624* >20 10.2	Potassium	ppm	ASTM D5185(m)	>20	0		
Nitration Abs/cm ASTM D7624* >20 10.2	INFRA-RED		method	limit/base	current	history1	history2
	Soot %	%	ASTM D7844*		0		
	Nitration	Abs/cm	ASTM D7624*	>20	10.2		
	Sulfation	Abs/.1mm	ASTM D7415*	>30	18.0		



OIL ANALYSIS REPORT

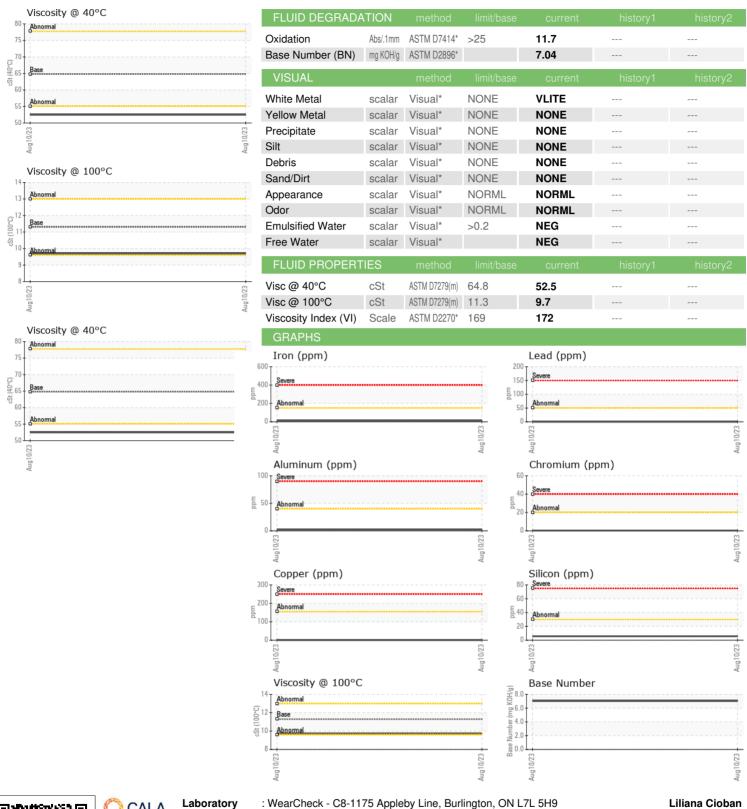



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: 02575350

: WC0848008

Received : 5620401

: 11 Aug 2023 Diagnosed : 15 Aug 2023 : Kevin Marson Diagnostician

Test Package : MOB 2 (Additional Tests: KV40, VI) To discuss this sample report, contact Customer Service at 1-800-268-2131.

Liliana Cioban 14096 Danby Rd Georgetown, ON CA L7G 0K4 Contact: Liliana Cioban liliana.cioban@outlook.com

T: F:

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.