




OIL ANALYSIS REPORT

Sample Rating Trend

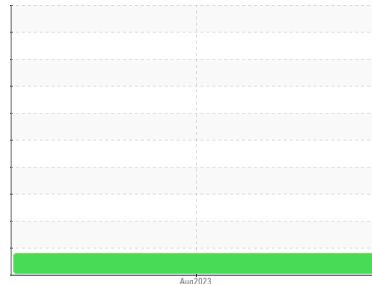

FUEL



Machine Id
TOYOTA NO UNIT WC0848009

Component
Gasoline Engine

Fluid
MOBIL Mobil 1 Advanced Fuel Economy 0W-16 (--- LTR)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please submit a sample of the new (unused) oil to establish a baseline. Please note that this is a corrected copy for data entry updates.

Wear

All component wear rates are normal.

▲ Contamination

Light fuel dilution occurring.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | WC0848009 | --- | --- |
| Sample Date | Client Info | 10 Aug 2023 | --- | --- |
| Machine Age | hrs | 0 | --- | --- |
| Oil Age | hrs | 0 | --- | --- |
| Oil Changed | Client Info | N/A | --- | --- |
| Sample Status | | MARGINAL | --- | --- |

CONTAMINATION

| method | limit/base | current | history1 | history2 |
|--------|------------|------------|----------|----------|
| Glycol | WC Method | NEG | --- | --- |

WEAR METALS

| method | limit/base | current | history1 | history2 | |
|-----------|------------|--------------------|--------------|----------|-----|
| Iron | ppm | ASTM D5185(m) >150 | 6 | --- | --- |
| Chromium | ppm | ASTM D5185(m) >20 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185(m) >5 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185(m) | 0 | --- | --- |
| Silver | ppm | ASTM D5185(m) >2 | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185(m) >40 | 26 | --- | --- |
| Lead | ppm | ASTM D5185(m) >50 | 0 | --- | --- |
| Copper | ppm | ASTM D5185(m) >155 | 1 | --- | --- |
| Tin | ppm | ASTM D5185(m) >10 | 3 | --- | --- |
| Antimony | ppm | ASTM D5185(m) | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185(m) | 0 | --- | --- |
| Beryllium | ppm | ASTM D5185(m) | 0 | --- | --- |
| Cadmium | ppm | ASTM D5185(m) | 0 | --- | --- |

ADDITIVES

| method | limit/base | current | history1 | history2 | |
|------------|------------|---------------|--------------|----------|-----|
| Boron | ppm | ASTM D5185(m) | 80 | --- | --- |
| Barium | ppm | ASTM D5185(m) | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185(m) | 89 | --- | --- |
| Manganese | ppm | ASTM D5185(m) | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185(m) | 550 | --- | --- |
| Calcium | ppm | ASTM D5185(m) | 1215 | --- | --- |
| Phosphorus | ppm | ASTM D5185(m) | 726 | --- | --- |
| Zinc | ppm | ASTM D5185(m) | 776 | --- | --- |
| Sulfur | ppm | ASTM D5185(m) | 2274 | --- | --- |
| Lithium | ppm | ASTM D5185(m) | <1 | --- | --- |

CONTAMINANTS





| method | limit/base | current | history1 | history2 | |
|-----------|------------|--------------------|--------------|----------|-----|
| Silicon | ppm | ASTM D5185(m) >30 | 17 | --- | --- |
| Sodium | ppm | ASTM D5185(m) >400 | 2 | --- | --- |
| Potassium | ppm | ASTM D5185(m) >20 | 0 | --- | --- |
| Fuel | % | ASTM D7593* >4.0 | ▲ 3.6 | --- | --- |

INFRA-RED

| method | limit/base | current | history1 | history2 | |
|-----------|------------|-----------------|-------------|----------|-----|
| Soot % | % | ASTM D7844* | 0 | --- | --- |
| Nitration | Abs/cm | ASTM D7624* >20 | 8.9 | --- | --- |
| Sulfation | Abs/.1mm | ASTM D7415* >30 | 20.2 | --- | --- |



OIL ANALYSIS REPORT





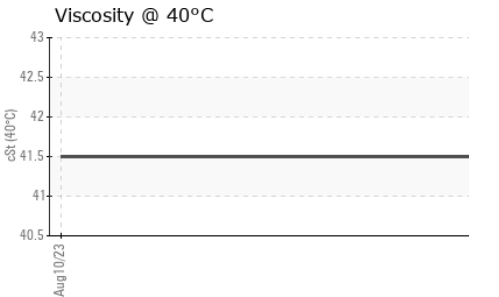
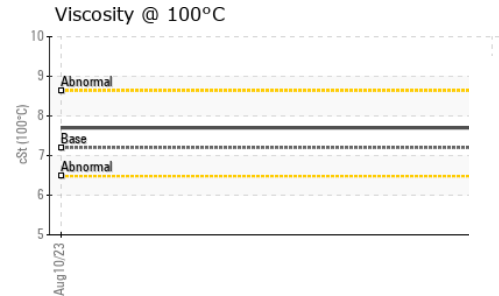
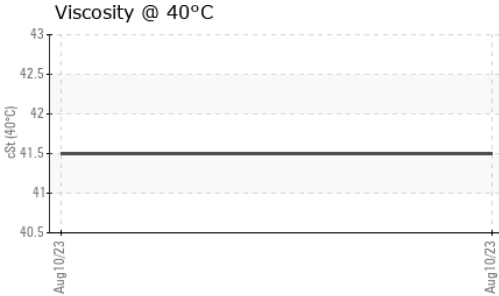
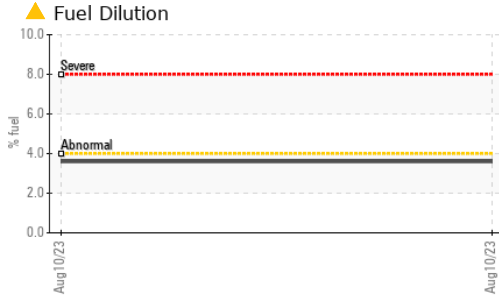


| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation | Abs./1mm | ASTM D7414* | >25 | 12.5 | --- | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896* | | 4.69 | --- | --- |

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal | scalar | Visual* | NONE | VLITE | --- | --- |
| Yellow Metal | scalar | Visual* | NONE | NONE | --- | --- |
| Precipitate | scalar | Visual* | NONE | NONE | --- | --- |
| Silt | scalar | Visual* | NONE | VLITE | --- | --- |
| Debris | scalar | Visual* | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | Visual* | NONE | NONE | --- | --- |
| Appearance | scalar | Visual* | NORML | NORML | --- | --- |
| Odor | scalar | Visual* | NORML | NORML | --- | --- |
| Emulsified Water | scalar | Visual* | >0.2 | NEG | --- | --- |
| Free Water | scalar | Visual* | | NEG | --- | --- |

| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
|----------------------|-------|---------------|------------|-------------|----------|----------|
| Visc @ 40°C | cSt | ASTM D7279(m) | | 41.5 | --- | --- |
| Visc @ 100°C | cSt | ASTM D7279(m) | 7.2 | 7.7 | --- | --- |
| Viscosity Index (VI) | Scale | ASTM D2270* | | 156 | --- | --- |

GRAPHS

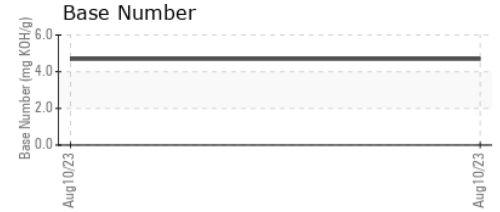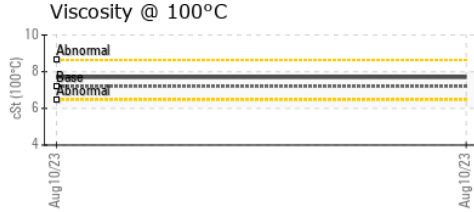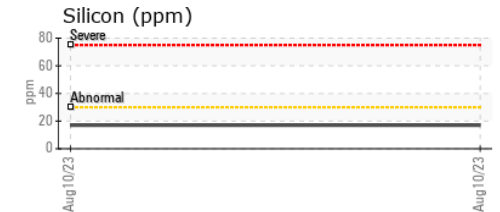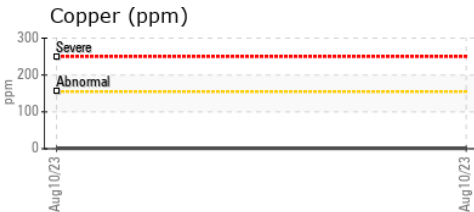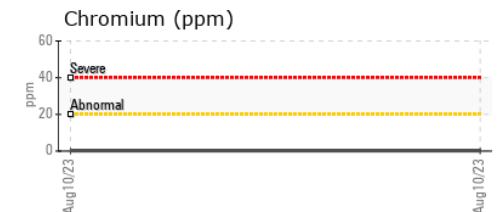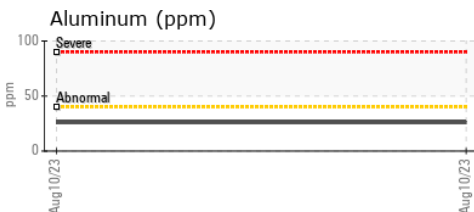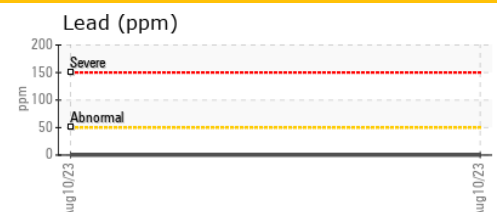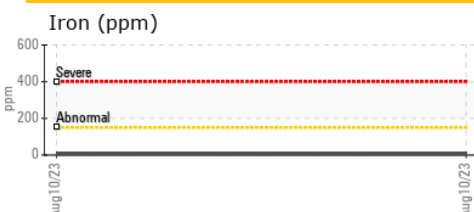

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0848009 **Received** : 11 Aug 2023
Lab Number : **02575351** **Diagnosed** : 15 Aug 2023
Unique Number : 5620402 **Diagnostician** : Kevin Marson
Test Package : MOB 2 (Additional Tests: FuelDilution, KV40, PercentFuel, VI)

Liliana Cioban
 14096 Danby Rd
 Georgetown, ON
 CA L7G 0K4
 Contact: Liliana Cioban
 liliana.cioban@outlook.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.