


# **OIL ANALYSIS REPORT**

Sample Rating Trend



NORMAL



# EPIROC ST14 SCP205

Rear Right Planetary

SAE 85W140 (--- GAL)

### Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the


### **Fluid Condition**

The condition of the oil is acceptable for the time in service.

|                               |            |                                |              | Aug2023      |                |               |
|-------------------------------|------------|--------------------------------|--------------|--------------|----------------|---------------|
| SAMPLE INFORM                 | MATION     | method                         | limit/base   | current      | history1       | history2      |
| Sample Number                 |            | Client Info                    |              | WC0835177    |                |               |
| Sample Date                   |            | Client Info                    |              | 07 Aug 2023  |                |               |
| Machine Age                   | hrs        | Client Info                    |              | 903          |                |               |
| Oil Age                       | hrs        | Client Info                    |              | 0            |                |               |
| Oil Changed                   |            | Client Info                    |              | N/A          |                |               |
| Sample Status                 |            |                                |              | NORMAL       |                |               |
| WEAR METALS                   |            | method                         | limit/base   | current      | history1       | history2      |
| Iron                          | ppm        | ASTM D5185(m)                  | >500         | 92           |                |               |
| Chromium                      | ppm        | ASTM D5185(m)                  | >10          | <1           |                |               |
| Nickel                        | ppm        | ASTM D5185(m)                  | >10          | 0            |                |               |
| Titanium                      | ppm        | ASTM D5185(m)                  |              | 1            |                |               |
| Silver                        | ppm        | ASTM D5185(m)                  |              | 0            |                |               |
| Aluminum                      | ppm        | ASTM D5185(m)                  | >25          | 4            |                |               |
| Lead                          | ppm        | ASTM D5185(m)                  | >25          | 0            |                |               |
| Copper                        | ppm        | ASTM D5185(m)                  |              | 9            |                |               |
| Tin                           | ppm        | ASTM D5185(m)                  | >10          | 0            |                |               |
| Antimony                      | ppm        | ASTM D5185(m)                  |              | 0            |                |               |
| Vanadium                      | ppm        | ASTM D5185(m)                  | 70           | 0            |                |               |
| Beryllium                     | ppm        | ASTM D5185(m)                  |              | 0            |                |               |
| Cadmium                       | ppm        | ASTM D5185(m)                  |              | 0            |                |               |
| ADDITIVES                     |            | method                         | limit/base   | current      | history1       | history2      |
| Boron                         | ppm        | ASTM D5185(m)                  |              | 235          |                |               |
| Barium                        | ppm        | ASTM D5185(m)                  |              | 0            |                |               |
| Molybdenum                    | ppm        | ASTM D5185(m)                  |              | 0            |                |               |
| Manganese                     | ppm        | ASTM D5185(m)                  |              | 1            |                |               |
| Magnesium                     | ppm        | ASTM D5185(m)                  |              | 2            |                |               |
| Calcium                       | ppm        | ASTM D5185(m)                  |              | 9            |                |               |
| Phosphorus                    | ppm        | ASTM D5185(m)                  |              | 989          |                |               |
| Zinc                          | ppm        | ASTM D5185(m)                  |              | 9            |                |               |
| Sulfur                        | ppm        | ASTM D5185(m)                  |              | 18419        |                |               |
| Lithium                       | ppm        | ASTM D5185(m)                  |              | <1           |                |               |
| CONTAMINANTS                  |            | method                         | limit/base   | current      | history1       | history2      |
|                               |            |                                |              |              | Tilstory       | HISTOLYZ      |
| Silicon                       | ppm        | ASTM D5185(m)                  | >75          | 14           |                |               |
| Sodium<br>Potassium           | ppm<br>ppm | ASTM D5185(m)<br>ASTM D5185(m) | >20          | 2            |                |               |
| VISUAL                        | PPIII      | method                         | limit/base   | current      | history1       | history2      |
|                               | cooler     |                                | NONE         | NONE         |                |               |
| White Metal Yellow Metal      | scalar     | Visual*                        |              |              |                |               |
|                               | scalar     | Visual*<br>Visual*             | NONE<br>NONE | NONE<br>NONE |                |               |
| Precipitate                   | scalar     |                                |              |              |                |               |
| Silt                          | scalar     | Visual*                        | NONE         | NONE         |                |               |
| Debris                        | scalar     | Visual*                        | NONE         | NONE         |                |               |
| Sand/Dirt                     | scalar     | Visual*                        | NONE         | NONE         |                |               |
| Appearance                    | scalar     | Visual*                        | NORML        | NORML        |                |               |
| Odor                          | scalar     | Visual*                        | NORML        | NORML        |                |               |
| Emulsified Water              | scalar     | Visual*                        | >0.2         | NEG          |                |               |
| Free Water<br>3:37:51) Rev: 1 | scalar     | Visual*                        | Co           | NEG          | Mitch Lamontos | <br>VID270KIE |



## **OIL ANALYSIS REPORT**

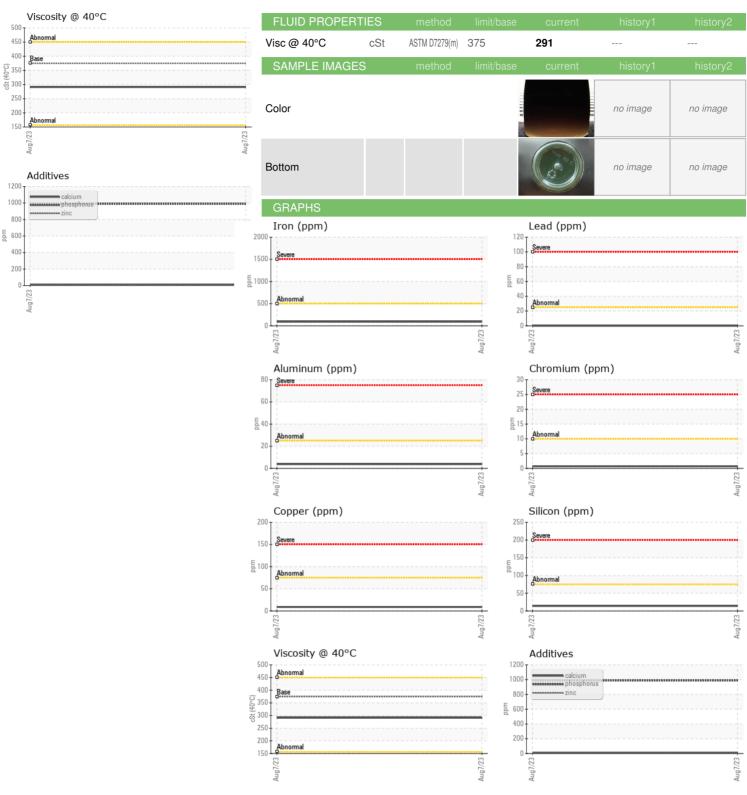



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number** 

: WC0835177 : 02575441 : 5620492 Test Package : MOB 1

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received

: 11 Aug 2023 : 11 Aug 2023 Diagnosed : Wes Davis Diagnostician

Agnico Eagle Canada 1350 Government Rd. W, MACASSA COMPLEX Kirkland Lake, ON

CA P2N 3J1 Contact: Mitch Lamontagne

AEM\_KL\_macassaoilsampleresults@agnicoeagle.com

Contact/Location: Mitch Lamontagne - KIR370KIR

T: (705)567-5208 F: (705)567-5221

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.