



OIL ANALYSIS REPORT

Sample Rating Trend


NORMAL



Machine Id
NO UNIT 02575448

Component
Left Planetary

Fluid
GEAR OIL SAE 80W140 (--- GAL)

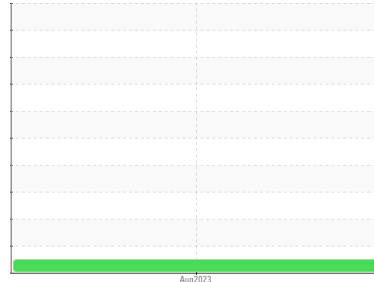

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W140. Please confirm. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC	---	---
Sample Date	Client Info		10 Aug 2023	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			NORMAL	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >500	440	---	---
Chromium	ppm	ASTM D5185(m) >10	4	---	---
Nickel	ppm	ASTM D5185(m) >10	2	---	---
Titanium	ppm	ASTM D5185(m)	1	---	---
Silver	ppm	ASTM D5185(m)	0	---	---
Aluminum	ppm	ASTM D5185(m) >25	23	---	---
Lead	ppm	ASTM D5185(m) >25	2	---	---
Copper	ppm	ASTM D5185(m) >75	92	---	---
Tin	ppm	ASTM D5185(m) >10	2	---	---
Antimony	ppm	ASTM D5185(m) >5	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 400	167	---	---
Barium	ppm	ASTM D5185(m) 200	<1	---	---
Molybdenum	ppm	ASTM D5185(m) 12	<1	---	---
Manganese	ppm	ASTM D5185(m)	5	---	---
Magnesium	ppm	ASTM D5185(m) 12	14	---	---
Calcium	ppm	ASTM D5185(m) 150	38	---	---
Phosphorus	ppm	ASTM D5185(m) 1650	995	---	---
Zinc	ppm	ASTM D5185(m) 125	33	---	---
Sulfur	ppm	ASTM D5185(m) 22500	18322	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >75	81	---	---
Sodium	ppm	ASTM D5185(m)	15	---	---
Potassium	ppm	ASTM D5185(m) >20	8	---	---

VISUAL



	method	limit/base	current	history1	history2
White Metal	scalar	Visual* NONE	VLITE	---	---
Yellow Metal	scalar	Visual* NONE	NONE	---	---
Precipitate	scalar	Visual* NONE	NONE	---	---
Silt	scalar	Visual* NONE	VLITE	---	---
Debris	scalar	Visual* NONE	NONE	---	---
Sand/Dirt	scalar	Visual* NONE	NONE	---	---
Appearance	scalar	Visual* NORML	NORML	---	---
Odor	scalar	Visual* NORML	NORML	---	---
Emulsified Water	scalar	Visual* >0.2	NEG	---	---
Free Water	scalar	Visual*	NEG	---	---

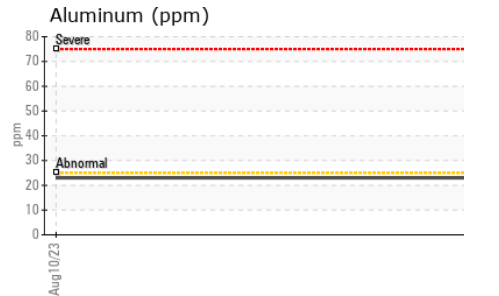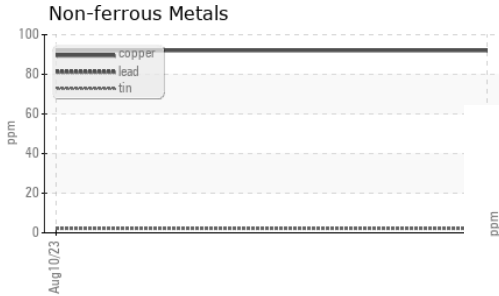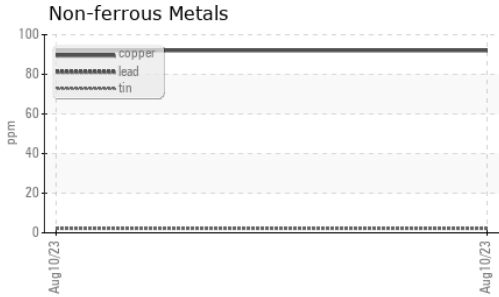









OIL ANALYSIS REPORT



FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m) 263	298	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

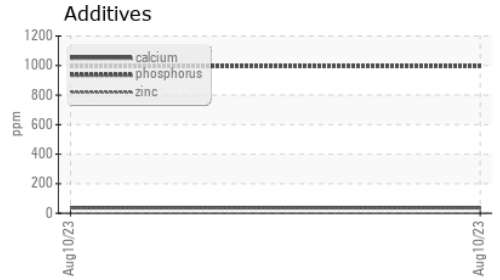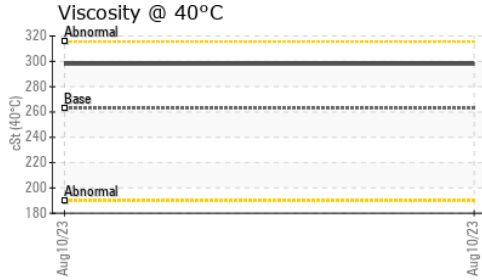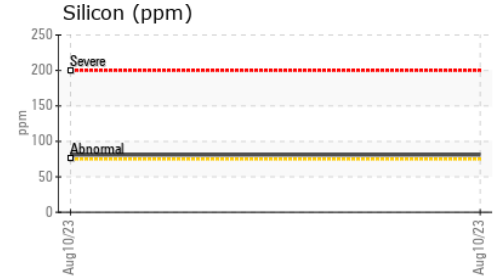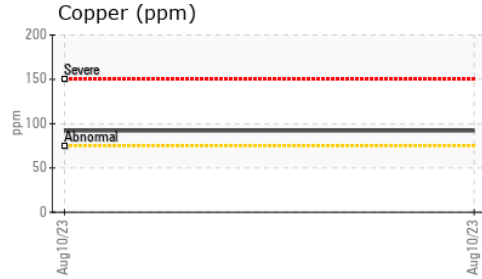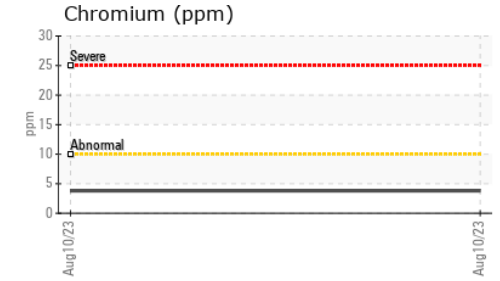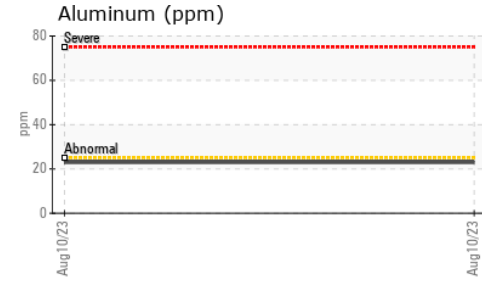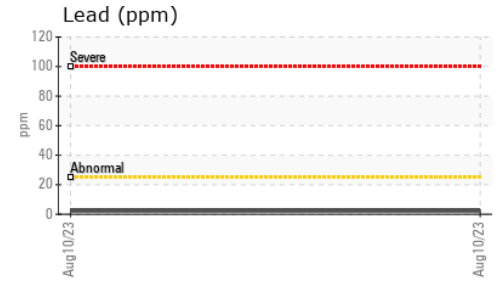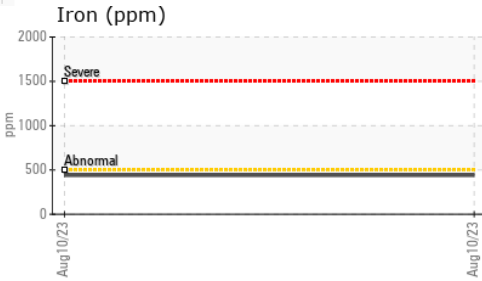

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC **Received** : 11 Aug 2023
Lab Number : 02575448 **Diagnosed** : 11 Aug 2023
Unique Number : 5620499 **Diagnostician** : Kevin Marson
Test Package : MOB 1

Agnico Eagle Canada
 1350 Government Rd. W, MACASSA COMPLEX
 Kirkland Lake, ON
 CA P2N 3J1
 Contact: Mitch Lamontagne
 AEM_KL_macassaoilsampleresults@agnicoeagle.com
 T: (705)567-5208
 F: (705)567-5221

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.