




# OIL ANALYSIS REPORT

Sample Rating Trend

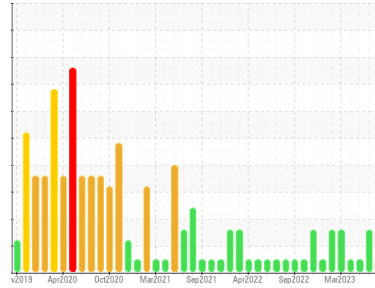

**NORMAL**



Area  
**Direct Strip Mill/Finishing**  
 Machine Id  
**ROLL BITE BULK (S/N DSC 205)**  
 Component  
**Bulk Fluid Tank**  
 Fluid  
**ISO 100 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0780863</b>	WC0813710	WC0780800
Sample Date	Client Info		<b>08 Aug 2023</b>	21 Jun 2023	15 May 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	MARGINAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		<b>0</b>	0	0
Iron	ppm	ASTM D5185(m)	<b>4</b>	8	5
Chromium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	<b>&lt;1</b>	0	0
Lead	ppm	ASTM D5185(m)	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185(m)	<b>0</b>	<1	0
Tin	ppm	ASTM D5185(m)	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>1</b>	<1	<1
Barium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	<b>0</b>	<1	0
Calcium	ppm	ASTM D5185(m)	<b>&lt;1</b>	2	0
Phosphorus	ppm	ASTM D5185(m)	<b>2</b>	3	2
Zinc	ppm	ASTM D5185(m)	<b>1</b>	4	<1
Sulfur	ppm	ASTM D5185(m)	<b>10976</b>	11437	11479
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	<b>1</b>	1	<1
Sodium	ppm	ASTM D5185(m)	<b>0</b>	2	<1
Potassium	ppm	ASTM D5185(m) >20	<b>0</b>	<1	0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	<b>1.21</b>	1.30	1.36




# OIL ANALYSIS REPORT

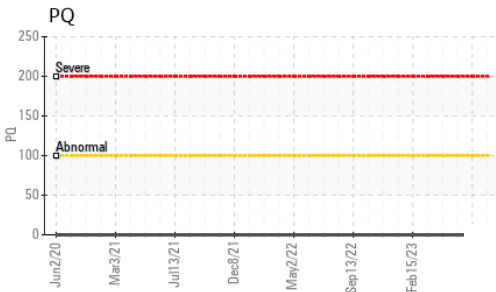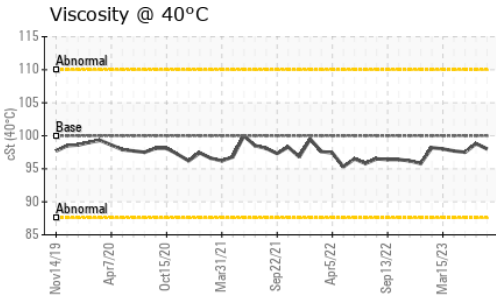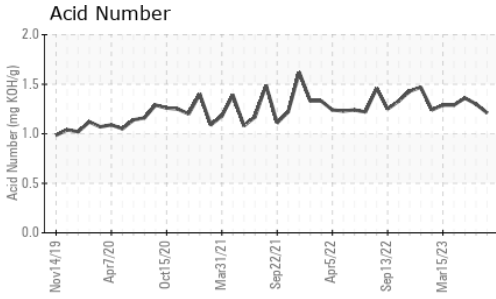






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	VLITE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	NEG	▲ .2%	NEG
Free Water	scalar	Visual*	NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	100	98.0	98.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

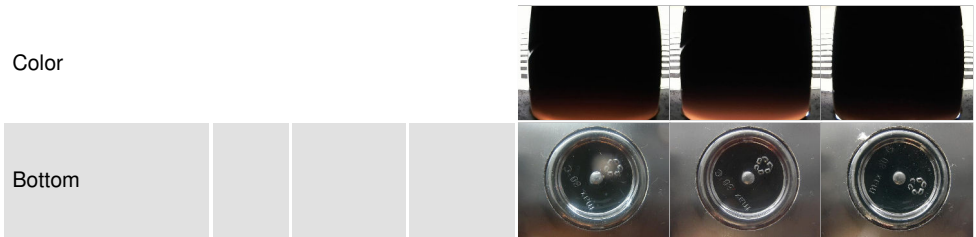

## GRAPHS

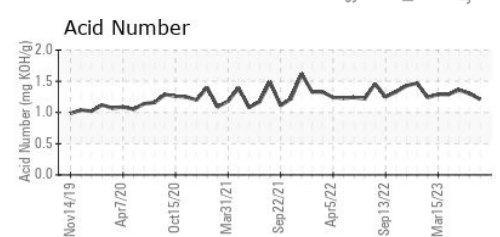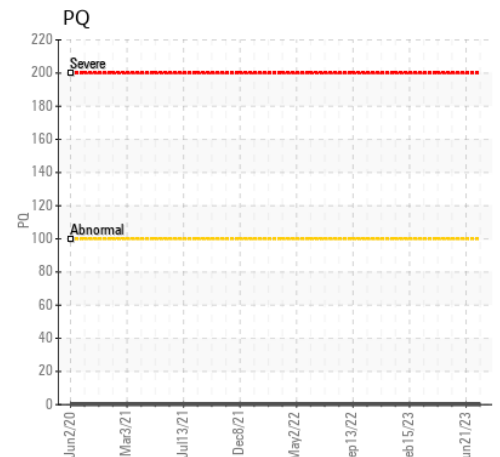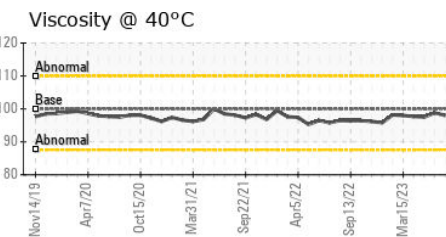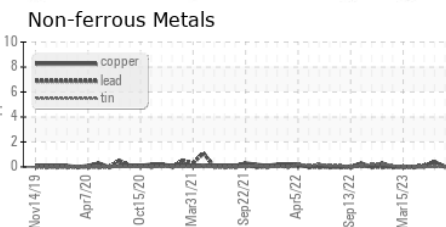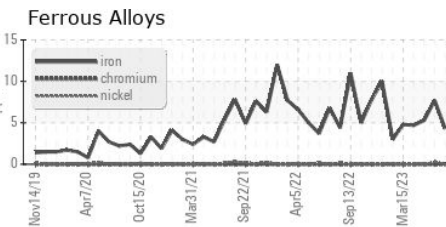

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **ALGOMA STEEL INC. - STORES DEPT.**  
**Sample No.** : WC0780863 **Received** : 11 Aug 2023 **301 WALLACE TERRACE**  
**Lab Number** : 02575469 **Diagnosed** : 14 Aug 2023 **SAULT STE MARIE, ON**  
**Unique Number** : 5620520 **Diagnostician** : Wes Davis **CA P6C 1K8**  
**Test Package** : IND 2

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Algoma Reliability  
 algomareliability@algoma.com  
 T: (705)206-1059  
 F: (705)945-3585