




OIL ANALYSIS REPORT

Sample Rating Trend

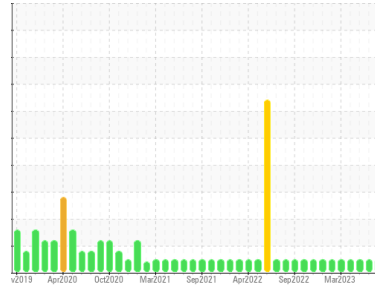

NORMAL



Area
Direct Strip Mill/Finishing
 Machine Id
HSM 460 BLK (S/N DSC 200)

Component
Gear Lube System
 Fluid
GEAR OIL ISO 460 (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0780861	WC0813708	WC0780798
Sample Date	Client Info	08 Aug 2023	21 Jun 2023	15 May 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	NORMAL	NORMAL

WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184*	0	0	0
Iron	ppm	ASTM D5185(m) >150	<1	<1
Chromium	ppm	ASTM D5185(m) >10	0	0
Nickel	ppm	ASTM D5185(m) >10	0	<1
Titanium	ppm	ASTM D5185(m)	0	0
Silver	ppm	ASTM D5185(m)	0	0
Aluminum	ppm	ASTM D5185(m) >25	<1	0
Lead	ppm	ASTM D5185(m) >100	0	<1
Copper	ppm	ASTM D5185(m) >50	<1	<1
Tin	ppm	ASTM D5185(m) >10	0	0
Antimony	ppm	ASTM D5185(m) >5	0	0
Vanadium	ppm	ASTM D5185(m)	0	0
Beryllium	ppm	ASTM D5185(m)	0	0
Cadmium	ppm	ASTM D5185(m)	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 50	<1	<1
Barium	ppm	ASTM D5185(m) 15	0	0
Molybdenum	ppm	ASTM D5185(m) 15	0	0
Manganese	ppm	ASTM D5185(m)	0	0
Magnesium	ppm	ASTM D5185(m) 50	<1	0
Calcium	ppm	ASTM D5185(m) 50	<1	9
Phosphorus	ppm	ASTM D5185(m) 350	261	273
Zinc	ppm	ASTM D5185(m) 100	2	5
Sulfur	ppm	ASTM D5185(m) 12500	8893	9295
Lithium	ppm	ASTM D5185(m)	<1	<1

CONTAMINANTS




method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >50	4	3
Sodium	ppm	ASTM D5185(m)	0	0
Potassium	ppm	ASTM D5185(m) >20	0	<1

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 0.85	0.46	0.53




OIL ANALYSIS REPORT

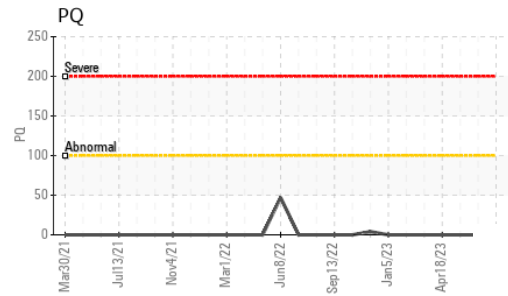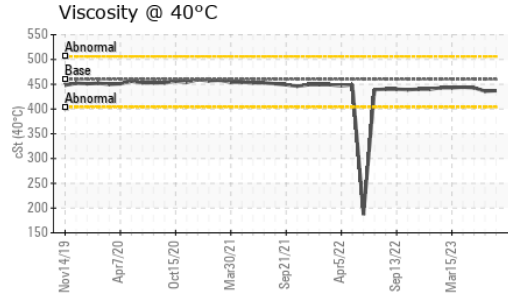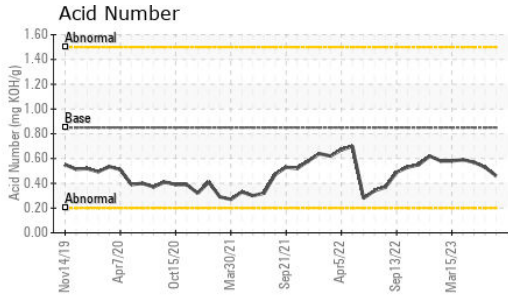






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	460	437	436	443

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

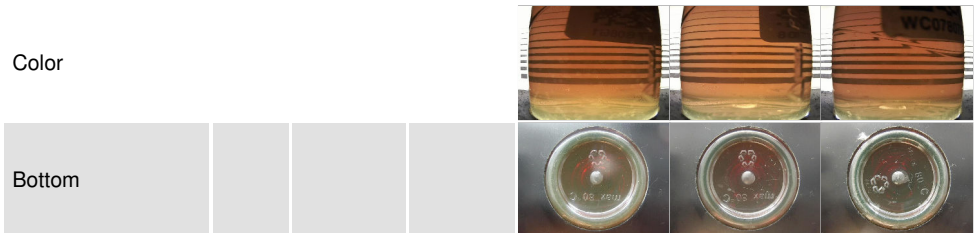

GRAPHS

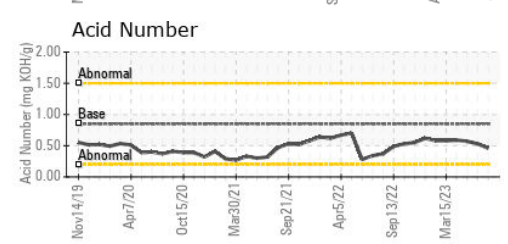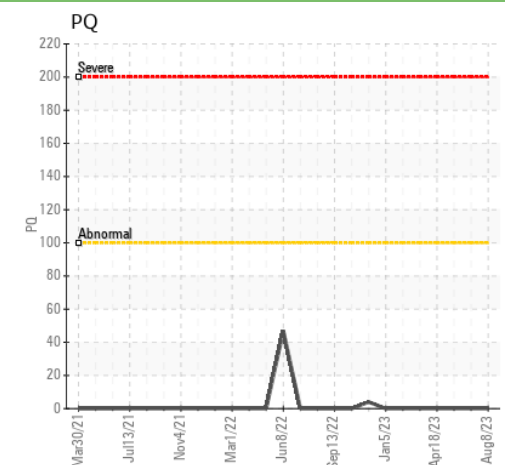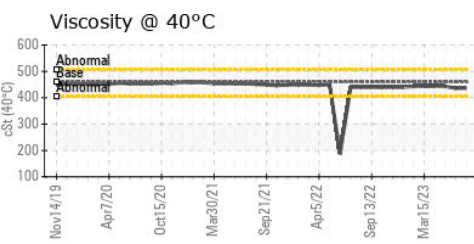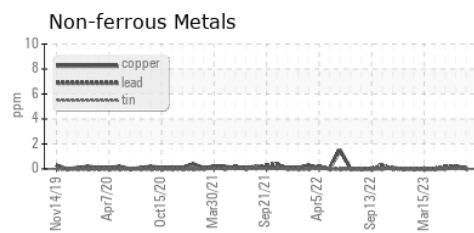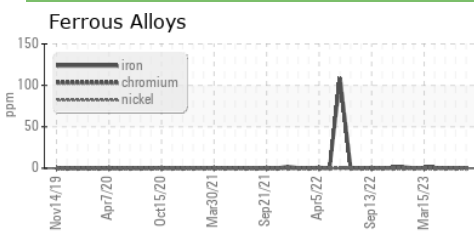

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **ALGOMA STEEL INC. - STORES DEPT.**
Sample No. : WC0780861 **Received** : 11 Aug 2023 **301 WALLACE TERRACE**
Lab Number : **02575471** **Diagnosed** : 14 Aug 2023 **SAULT STE MARIE, ON**
Unique Number : 5620522 **Diagnostician** : Wes Davis **CA P6C 1K8**
Test Package : IND 2

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Algoma Reliability
 algomareliability@algoma.com
 T: (705)206-1059
 F: (705)945-3585