




PROBLEM SUMMARY

Sample Rating Trend


DEGRADATION

Area
Direct Strip Mill/Finishing
 Machine Id
HSM WEST GLYCOL BLK (S/N DSC 196)
 Component
Hydraulic System
 Fluid
HOUGHTON HOUGHTON SAFE 616 (--- GAL)

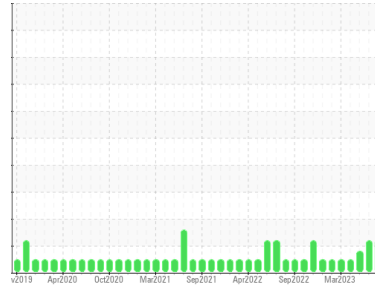

COMPONENT CONDITION SUMMARY

▲ Reserve Alkalinity

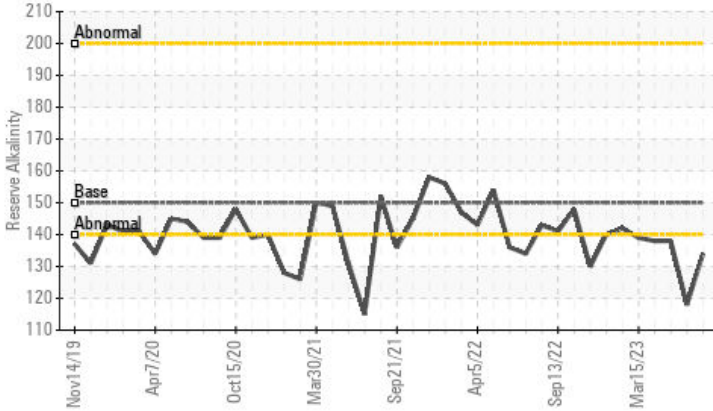

RECOMMENDATION

Due to the low reserve alkalinity it is advised that you contact HOUGHTON to assist in restoring the proper amine concentration. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

PROBLEMATIC TEST RESULTS

| Sample Status | ABNORMAL | ABNORMAL | ATTENTION |
|--|----------|----------|-----------|
| Alkiline Reserve (Oils) ml KOH/g ASTM D1121* 150 | ▲ 134 | ▲ 118 | 138 |

Customer Id: ALGSSM
 Sample No.: WC0780857
 Lab Number: 02575517
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

| Action | Status | Date | Done By | Description |
|----------------------|--------|------|---------|--|
| Resample | --- | --- | ? | We recommend an early resample to monitor this condition. |
| Contact Required | --- | --- | ? | Due to the low reserve alkalinity it is advised that you contact HOUGHTON to assist in restoring the proper amine concentration. |
| Alert | --- | --- | ? | NOTE: We recommend using IND 3 test kits, |
| Information Required | --- | --- | ? | NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. |

HISTORICAL DIAGNOSIS

22 Jun 2023 Diag: Kevin Marson

DEGRADATION



Due to the low reserve alkalinity it is advised that you contact HOUGHTON to assist in restoring the proper amine concentration. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The reserve alkalinity of this fluid is lower than acceptable. The AN level is acceptable for this fluid. The pH level of this fluid is within the acceptable limits. The water concentration level is acceptable for this fluid.

view report



16 May 2023 Diag: Kevin Marson

WEAR



We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Iron ppm levels are noted. The low ferrous density (PQ) index indicates the wear metal levels are due to corrosion. All other component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The pH level of this fluid is within the acceptable limits. The reserve alkalinity of this fluid is acceptable. The water concentration level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



18 Apr 2023 Diag: Kevin Marson

NORMAL



Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The pH level of this fluid is within the acceptable limits. The reserve alkalinity of this fluid is acceptable. The water concentration level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report






OIL ANALYSIS REPORT

Sample Rating Trend

DEGRADATION

Area
Direct Strip Mill/Finishing
 Machine Id
HSM WEST GLYCOL BLK (S/N DSC 196)
 Component
Hydraulic System
 Fluid
HOUGHTON HOUGHTON SAFE 616 (--- GAL)

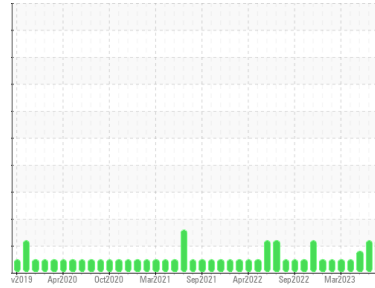

DIAGNOSIS

Recommendation

Due to the low reserve alkalinity it is advised that you contact HOUGHTON to assist in restoring the proper amine concentration. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The reserve alkalinity of this fluid is lower than acceptable. The AN level is acceptable for this fluid. The pH level of this fluid is within the acceptable limits. The water concentration level is acceptable for this fluid.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | WC0780857 | WC0813704 | WC0780795 |
| Sample Date | Client Info | | 08 Aug 2023 | 22 Jun 2023 | 16 May 2023 |
| Machine Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | | N/A | N/A | N/A |
| Sample Status | | | ABNORMAL | ABNORMAL | ATTENTION |

WEAR METALS

| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|--------------|----------|------|
| Iron | ppm | ASTM D5185(m) | >20 | 0 | <1 | ▲ 13 |
| Chromium | ppm | ASTM D5185(m) | >20 | 0 | <1 | 1 |
| Nickel | ppm | ASTM D5185(m) | >20 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | | <1 | 0 | 4 |
| Aluminum | ppm | ASTM D5185(m) | >20 | 0 | 0 | 2 |
| Lead | ppm | ASTM D5185(m) | >20 | 0 | 0 | <1 |
| Copper | ppm | ASTM D5185(m) | >20 | 0 | 1 | 2 |
| Tin | ppm | ASTM D5185(m) | >20 | 0 | 0 | 0 |
| Antimony | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 | |
|------------|--------|---------------|---------|--------------|----------|----|
| Boron | ppm | ASTM D5185(m) | | 3 | 1 | 6 |
| Barium | ppm | ASTM D5185(m) | | 1 | 0 | <1 |
| Molybdenum | ppm | ASTM D5185(m) | | 0 | <1 | 1 |
| Manganese | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185(m) | | 2 | <1 | 1 |
| Calcium | ppm | ASTM D5185(m) | | 4 | <1 | 7 |
| Phosphorus | ppm | ASTM D5185(m) | | 2 | <1 | 8 |
| Zinc | ppm | ASTM D5185(m) | | 0 | 0 | <1 |
| Sulfur | ppm | ASTM D5185(m) | | 57 | 6 | 20 |
| Lithium | ppm | ASTM D5185(m) | | <1 | 0 | <1 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|---------------|----------|--------|
| Silicon | ppm | ASTM D5185(m) | >15 | 0 | 0 | 5 |
| Sodium | ppm | ASTM D5185(m) | | 14 | 24 | 44 |
| Potassium | ppm | ASTM D5185(m) | >20 | 17 | 12 | 49 |
| Water | % | ASTM D6304* | >55 | 42.9 | 48.5 | 44.4 |
| ppm Water | ppm | ASTM D6304* | >55000 | 429000 | 485000 | 444000 |


FLUID CLEANLINESS

| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|-----------------|----------|----------|
| Particles >4µm | ASTM D7647 | >5000 | 1487 | 2010 | 1305 |
| Particles >6µm | ASTM D7647 | >1300 | 343 | 341 | 266 |
| Particles >14µm | ASTM D7647 | >160 | 37 | 5 | 12 |
| Particles >21µm | ASTM D7647 | >40 | 19 | 3 | 3 |
| Particles >38µm | ASTM D7647 | >10 | 2 | 0 | 0 |
| Particles >71µm | ASTM D7647 | >3 | 0 | 0 | 0 |
| Oil Cleanliness | ISO 4406 (c) | >19/17/14 | 18/16/12 | 18/16/10 | 18/15/11 |




OIL ANALYSIS REPORT


Reserve Alkalinity

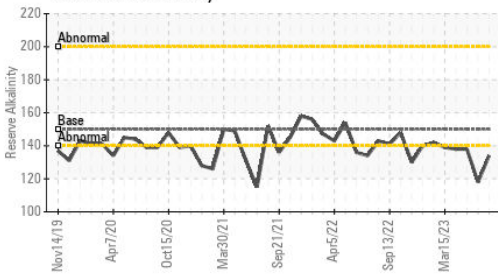


Particle Count

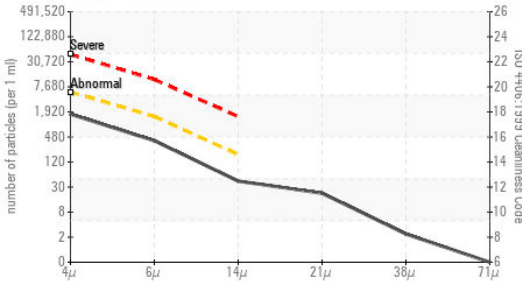


Acid Number

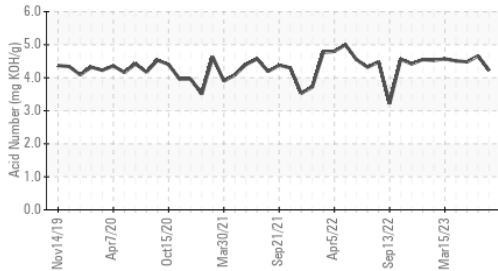

Water

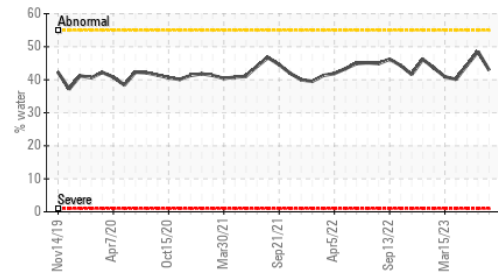

Viscosity @ 40°C

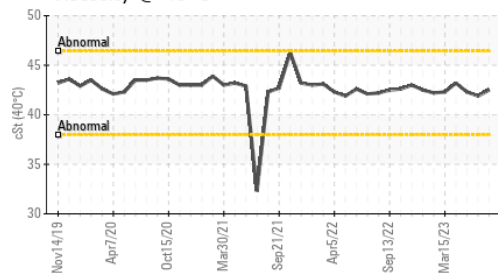


| FLUID DEGRADATION | method | limit/base | current | history1 | history2 |
|-------------------------|----------|-------------|---------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D974* | 4.22 | 4.66 | 4.48 |
| Alkiline Reserve (Oils) | ml KOH/g | ASTM D1121* | 150 | 134 | 118 |

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | Visual* | NONE | NONE | NONE |
| Yellow Metal | scalar | Visual* | NONE | NONE | NONE |
| Precipitate | scalar | Visual* | NONE | NONE | NONE |
| Silt | scalar | Visual* | NONE | NONE | NONE |
| Debris | scalar | Visual* | NONE | NONE | NONE |
| Sand/Dirt | scalar | Visual* | NONE | NONE | NONE |
| Appearance | scalar | Visual* | NORML | FRGLY | FRGLY |
| Odor | scalar | Visual* | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* | >55 | >10% | >10% |
| Free Water | scalar | Visual* | NEG | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|------------|---------------|---------|----------|----------|
| pH | Scale 0-14 | ASTM D1287* | 9.57 | 9.39 | 9.53 |
| Visc @ 40°C | cSt | ASTM D7279(m) | 42.5 | 41.9 | 42.3 |

SAMPLE IMAGES

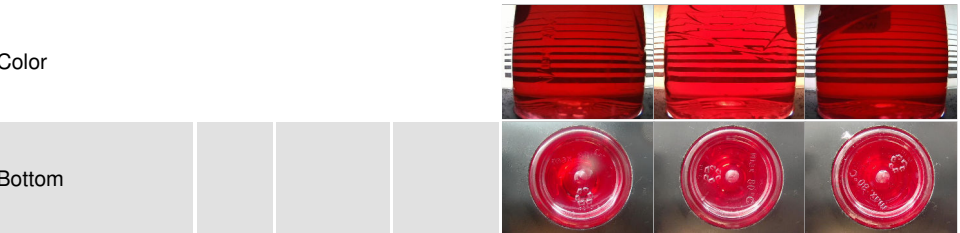

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 ALGOMA STEEL INC. - STORES DEPT.
Sample No. : WC0780857
Lab Number : 02575517
Unique Number : 5620568
Test Package : IND 2 (Additional Tests: KF, pH, ReserveAlk, TAN Man)

Received : 11 Aug 2023
Diagnosed : 22 Aug 2023
Diagnostician : Kevin Marson

301 WALLACE TERRACE
SAULT STE MARIE, ON
CA P6C 1K8
Contact: Algoma Reliability
algomareliability@algoma.com
T: (705)206-1059
F: (705)945-3585

To discuss this sample report, contact Customer Service at 1-800-268-2131.
Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
Validity of results and interpretation are based on the sample and information as supplied.