




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

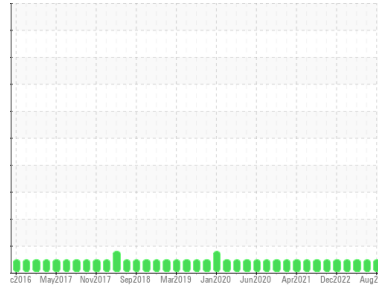

Area
[2038]
 Machine Id
NOVA BUS 1604
 Component
Rear Diesel Engine
 Fluid
VALVOLINE 15W40 (27 LTR)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0828575	WC0780468	WC0780441
Sample Date	Client Info			06 Aug 2023	30 Jun 2023	10 Apr 2023
Machine Age	kms	Client Info		574391	564700	547257
Oil Age	kms	Client Info		0	0	0
Oil Changed	Client Info			N/A	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>3.0	<1.0	<1.0	<1.0
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>130	6	5	5
Chromium	ppm	ASTM D5185(m)	>10	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	2	1	1
Lead	ppm	ASTM D5185(m)	>20	0	<1	0
Copper	ppm	ASTM D5185(m)	>125	6	3	2
Tin	ppm	ASTM D5185(m)	>4	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		34	79	99
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		33	13	11
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		45	83	78
Calcium	ppm	ASTM D5185(m)		2229	2146	2063
Phosphorus	ppm	ASTM D5185(m)		981	1010	952
Zinc	ppm	ASTM D5185(m)		1130	1165	1120
Sulfur	ppm	ASTM D5185(m)		3002	2851	2680
Lithium	ppm	ASTM D5185(m)		<1	<1	<1



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	4	3	3
Sodium	ppm	ASTM D5185(m)		2	2	2
Potassium	ppm	ASTM D5185(m)	>20	2	4	4

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	0.2	0.2	0.2
Nitration	Abs/cm	ASTM D7624*	>20	9.5	9.2	8.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.9	22.9	22.1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	18.2	19.9	18.8











OIL ANALYSIS REPORT

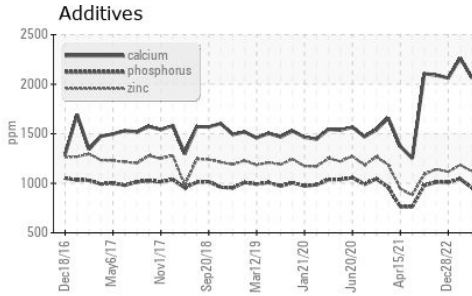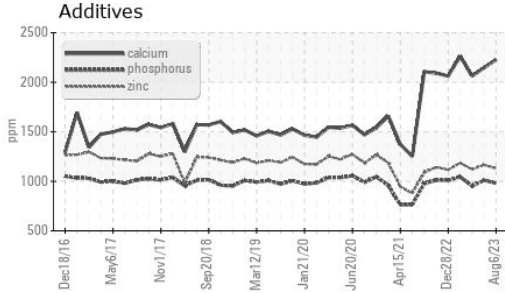

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	13.0	13.6	13.7

GRAPHS

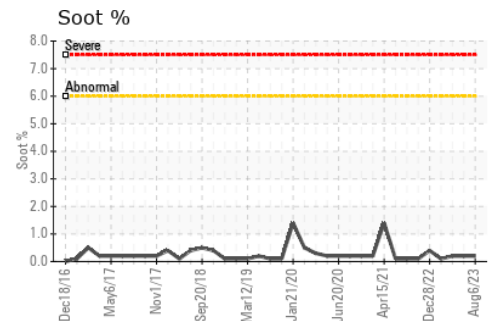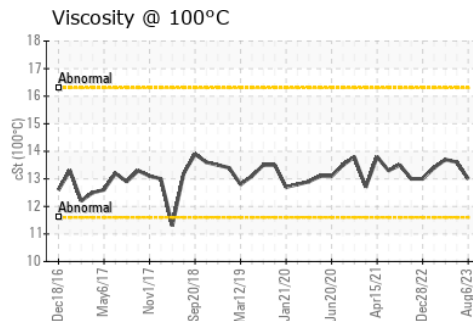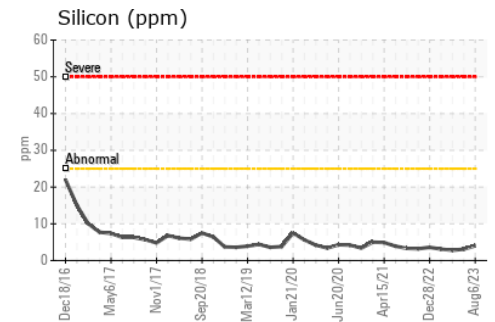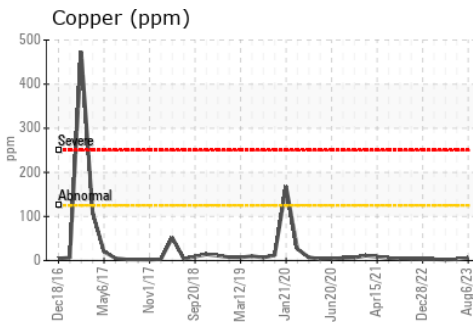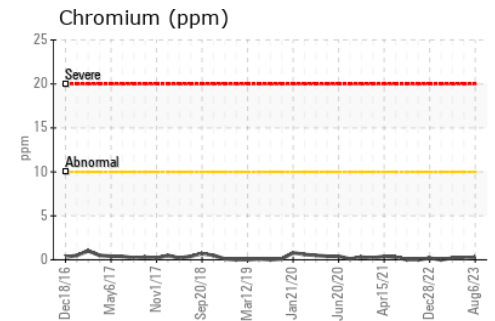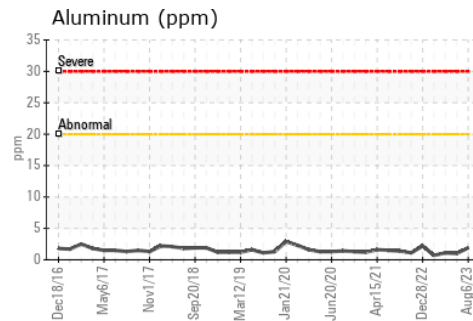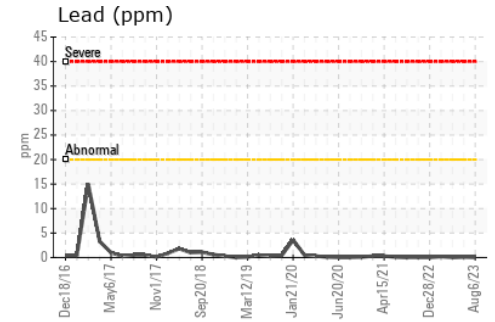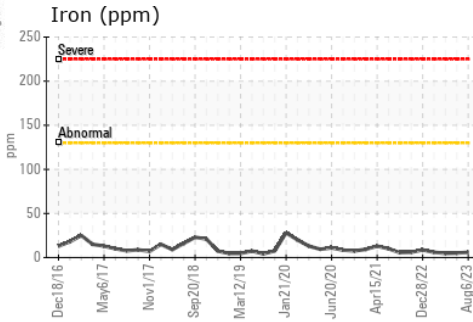

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0828575 **Received** : 14 Aug 2023
Lab Number : 02575590 **Diagnosed** : 14 Aug 2023
Unique Number : 5620641 **Diagnostician** : Wes Davis
Test Package : MOB 1

MVT Canadian Bus
 133 Welham Road
 Barrie, ON
 CA L4N 8Y3
 Contact: Frank Mastromarco
 frank.mastromarco@mvttransit.com
 T: (709)792-5033
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.