



# OIL ANALYSIS REPORT

Sample Rating Trend

**WEAR**



Area  
**[61082]**  
Machine Id  
**VOLVO VNL 4440**

Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SAE 10W30 (--- GAL)**



## DIAGNOSIS

### Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

### Wear

Iron ppm levels are abnormal. Cylinder, crank, or cam shaft wear is indicated.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The oil is no longer serviceable as a result of the abnormal and/or severe wear.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0831148</b>	---	---
Sample Date	Client Info		<b>11 Aug 2023</b>	---	---
Machine Age	kms	Client Info	<b>772114</b>	---	---
Oil Age	kms	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<b>&lt;1.0</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		<b>0</b>	---	---
Iron	ppm	ASTM D5185(m) >100	<b>▲ 121</b>	---	---
Chromium	ppm	ASTM D5185(m) >20	<b>2</b>	---	---
Nickel	ppm	ASTM D5185(m) >2	<b>2</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185(m) >25	<b>15</b>	---	---
Lead	ppm	ASTM D5185(m) >40	<b>2</b>	---	---
Copper	ppm	ASTM D5185(m) >330	<b>14</b>	---	---
Tin	ppm	ASTM D5185(m) >15	<b>1</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 1	<b>4</b>	---	---
Barium	ppm	ASTM D5185(m) 1	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m) 1	<b>60</b>	---	---
Manganese	ppm	ASTM D5185(m) 1	<b>2</b>	---	---
Magnesium	ppm	ASTM D5185(m) 10	<b>918</b>	---	---
Calcium	ppm	ASTM D5185(m) 2942	<b>1262</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 1102	<b>1024</b>	---	---
Zinc	ppm	ASTM D5185(m) 1351	<b>1192</b>	---	---
Sulfur	ppm	ASTM D5185(m) 3903	<b>2048</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	<b>10</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>5</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>4</b>	---	---

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	<b>1.2</b>	---	---
Nitration	Abs/cm	ASTM D7624* >20	<b>13.4</b>	---	---
Sulfation	Abs./1mm	ASTM D7415* >30	<b>27.9</b>	---	---



# OIL ANALYSIS REPORT










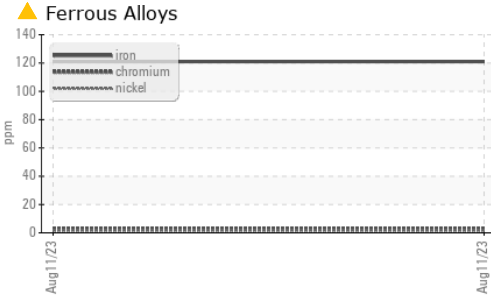


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	24.9	---

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	11.4	11.4	---

## GRAPHS

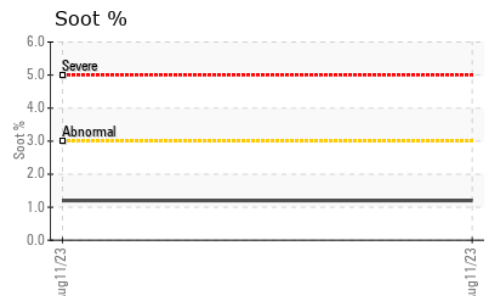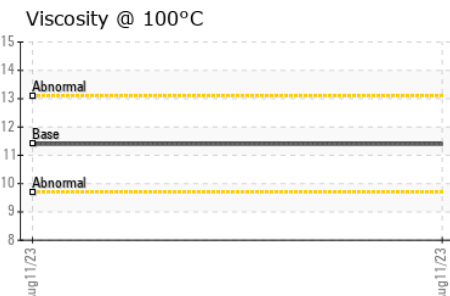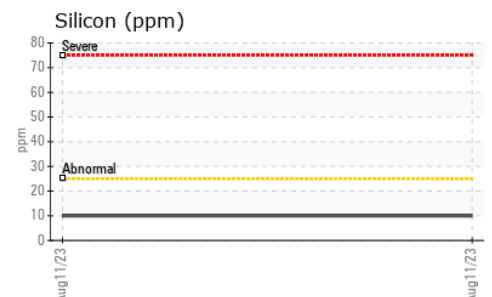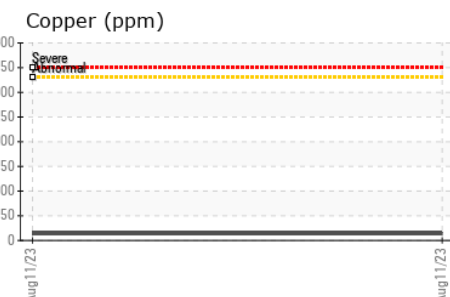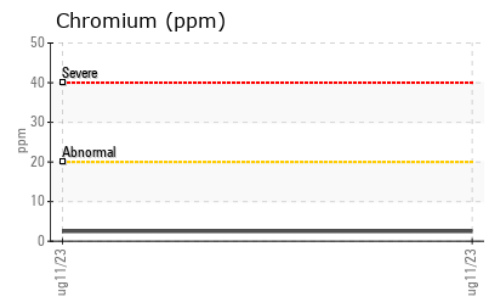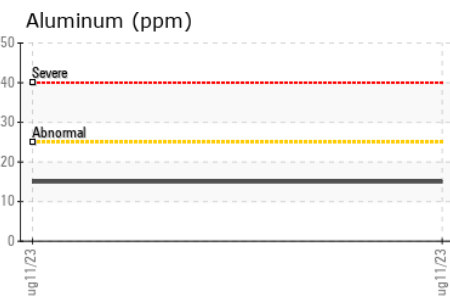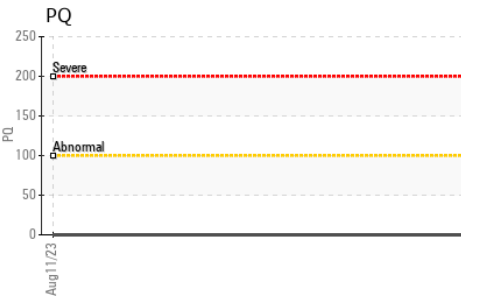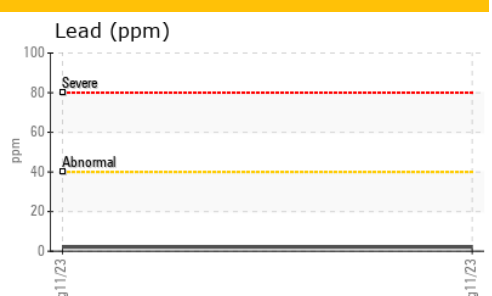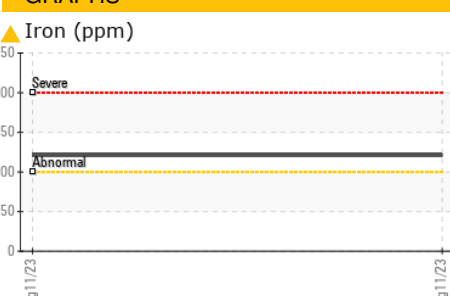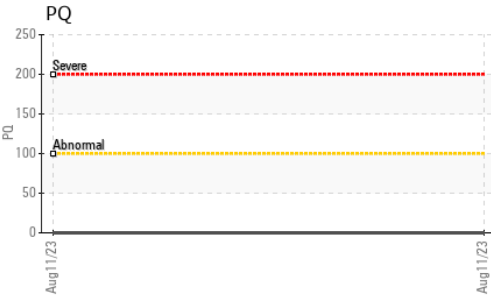

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 PERFORMANCE EQUIPMENT - VISION TRUCK  
**Sample No.** : WC0831148 **Received** : 14 Aug 2023  
**Lab Number** : 02575650 **Diagnosed** : 14 Aug 2023  
**Unique Number** : 5620701 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

415 EVANS AVENUE  
 ETOBICOKE, ON  
 CA M8W 0B3  
 Contact: Service  
 etobservice@visiontruckgroup.com  
 T:  
 F: