

OIL ANALYSIS REPORT

Area (C-FINO) Machine Id [C-FINO] SIR S76D C-FIGO CART BASELINE

Left Hydraulic System

MILITARY MIL-H-83282C (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





NORMAL

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0848790		
Sample Date		Client Info		11 Aug 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		1		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	0		
Chromium	ppm	ASTM D5185(m)	>10	0		
Nickel	ppm	ASTM D5185(m)	>10	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>10	0		
Lead	ppm	ASTM D5185(m)	>20	0		
Copper	ppm	ASTM D5185(m)	>20	<1		
Tin	ppm	ASTM D5185(m)	>10	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		0		
Calcium	ppm	ASTM D5185(m)		<1		
Phosphorus	ppm	ASTM D5185(m)		682		
Zinc	ppm	ASTM D5185(m)		1		
Sulfur	ppm	ASTM D5185(m)		71		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	2		
Sodium	ppm	ASTM D5185(m)		0		
Potassium	ppm	ASTM D5185(m)	>20	<1		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles 5-15µm	count	NAS 1638	>128000	8459		
Particles 15-25µm	count	NAS 1638	>22800	1080		
Particles 25-50µm	count	NAS 1638	>4050	525		
Particles 50-100µm	count	NAS 1638	>720	27		
Particles >100µm	count	NAS 1638	>128	41		
NAS 1638	Class	NAS 1638	>9	8		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

mg KOH/g ASTM D974* 0.1

Acid Number (AN)

Contact/Location: Scott Jacklin - FIGSEG Page 1 of 2

0.15

Sample Rating Trend




(0-0+14 Ba

12


Aug 11

ŝ A

OIL ANALYSIS REPORT

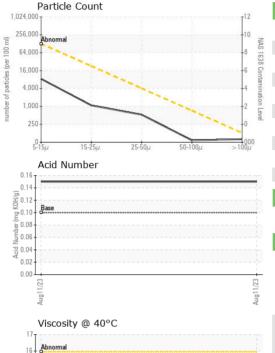

mac

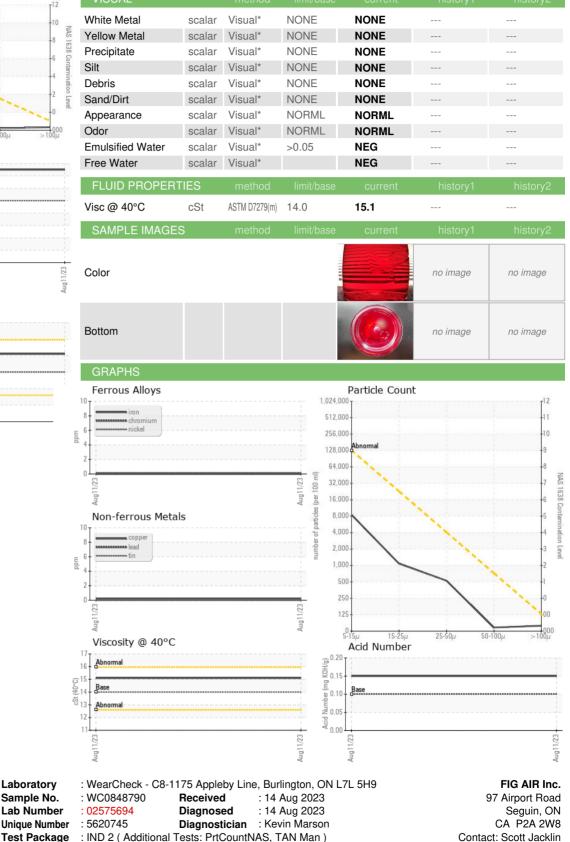

Report Id: FIGSEG [WCAMIS] 02575694 (Generated: 08/14/2023 17:54:16) Rev: 1

ISO 17025:2017 Accredited Laboratory

CALA

Laboratory

Sample No.

Lab Number

Unique Number

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

F:

SJacklin@figairinc.com

T: (705)774-3270